

MAKE A LASTING IMPACT

The new Impact™ On-Wall Kiosk brings a new flexibility to the digital signage enclosure market while maintaining a sleek aesthetic to complement a variety of environments. A depth-adjustable exterior frame allows for a variety of displays to be used and accommodates future display changeouts. An exclusive swing frame design keeps the display mounted to the frame when opened for unparalleled service and maintenance access.



- Depth-adjustable exterior frame can be set between 3-5" (76 - 127 mm) to accommodate a wide variety of flat panel depths
- Display stays mounted to swing frame when opened to provide full access to components and cabling
- Reversible hinges help to avoid installation and service obstructions
- Designed with hidden, passive cooling vents – active thermal management and power upgrade sold separately
- Integrated wall reveal compensates for uneven walls, keeping the front of the frame flat
- Tamperproof security hardware protects technology investments
- To avoid cutting into walls, tool-free on-wall storage is included utilizing Middle Atlantic's Lever Lock™ technology; additional on-wall storage available with purchase of PACUNV accessory
- Large center opening allows for additional storage utilizing Chief's In-wall Storage Boxes: PAC525, PAC526 and PAC527
- Standard black and white finish options



DEPTH
ADJUSTMENT



KIOSK LATCH



LEVER LOCK™




VENTILATION
LOUVERS

ACCESSORIES



PAC525, PAC526 & PAC527
In-Wall Storage Boxes



PACUNV Series
Lever Lock™
Tray Options



PACFAN Series
Active Thermal Management
Fan Kit Options

DIMENSIONS & COMPATIBILITY

| Model | Color | Weight Capacity | Mounting Patterns | Max TV Width | Max TV Height | Image Diagonal (A) | Overall Width (B) | Overall Height (C) | Viewing Area Width (D) | Viewing Area Height (E) | Side Bezels (F) | Top/Bottom Bezels (G) | |
|---------|-------|--------------------|--|--------------------|---------------------|--------------------|---------------------|----------------------|------------------------|--------------------------|---------------------|-----------------------|--------------------|
| LW46UBP | Black | 100 lbs (45.3 kg) | 300 x 300 mm 400 x 400 mm | 43" (1092.2 mm) | 26" (660.4 mm) | 46" | 28.5" (723.9 mm) | 46.5" (1181.1 mm) | 22.5" (571.5mm) | 40.1" (1018.5 mm) | 3" (76.2 mm) | 3.2" (81.3 mm) | |
| LW46UWP | White | | | | | | | | | | | | |
| LW47UBP | Black | | | | | 47" | | | 23" (584.2 mm) | 40.9" (1038.9 mm) | 2.75" (69.9 mm) | 2.8" (71.1 mm) | |
| LW47UWP | White | | | | | | | | | | | | |
| LW48UBP | Black | | | | | 48" | | | 23.5" (596.9 mm) | 41.5" (1054.1 mm) | 2.5" (63.5 mm) | 2.5" (63.5 mm) | |
| LW48UWP | White | | | | | | | | | | | | |
| LW49UBP | Black | 125 lbs (56.7 kg) | 300 x 300 mm 400 x 400 mm | 51" (1295.4 mm) | 30" (762.0 mm) | 49" | 32.5" (825.5 mm) | 54.5" (1384.3 mm) | 23.8" (604.5 mm) | 42.3" (1074.4 mm) | 4.35" (109.2 mm) | 6.1" (154.9 mm) | |
| LW49UWP | White | | | | | | | | | | | | |
| LW50UBP | Black | | | | | 50" | | | 24.3" (617.2mm) | 43.1" (1094.74) | 4.1" (104.1 mm) | 5.7" (144.8 mm) | |
| LW50UWP | White | | | | | | | | | | | | |
| LW55UBP | Black | | | | | 55" | | | 26.8" (680.7 mm) | 47.6" (1209 mm) | 2.85" (72.4 mm) | 3.45" (87.6 mm) | |
| LW55UWP | White | | | | | | | | | | | | |
| LW65UBP | Black | 175 lbs* (79.4 kg) | 300 x 300 mm 400 x 400 mm 600 x 400 mm 600 x 600 mm | 63" (1600.2 mm) | 36.5" (927.1 mm) | 65" | 39" (990.6 mm) | 66.5" (1689.1 mm) | 31.6" (802.6 mm) | 56.2" (1427.5 mm) | 3.7" (94 mm) | 5.15" (129.5 mm) | |
| LW65UWP | White | | | | | | | | | | | | |
| LW70UBP | Black | | | | | 70" | | | 34.1" (866.1 mm) | 60.6" (1539.2 mm) | 2.45" (61 mm) | 2.95" (74.9 mm) | |
| LW70UWP | White | | | | | | | | | | | | |
| LW75UBP | Black | | | | 68" (1727.2 mm) | 39" (990.6 mm) | 75" | 41.5" (1054.1 mm) | 71.5" (1816.1 mm) | 36.5" (927.1 mm) | 65" (1651 mm) | 2.5" (63.5 m) | 3.25" (82.6 mm) |
| LW75UWP | White | | | | | | | | | | | | |

* 175lbs for wood stud, plywood backed steel stud, block & concrete. 125lbs in steel stud.

SPECIFICATIONS

Orientation: Portrait

Exterior Frame Depth Range: 3-5" (76 - 127 mm)

Max Display Depth: 3.75" (95 mm)


NOTE: To keep the exterior frame depth at 4" (102 mm) or less a maximum display depth of 2.75" (69 mm) can be used.

On-Wall Storage Width (H): 16.5" (419 mm)


On-Wall Storage Height (I): 6.4" (163 mm) for 46-48" models; 10.4" (264 mm) for 49-75" models

On-Wall Storage Depth (J): Dependent on depth of display and desired frame depth; see Side of Frame view and below equations for details

- **Overall Kiosk Depth:** $L = 1.25" + K$
- **On-Wall Storage Depth:** $J = L - K - 3/4"$

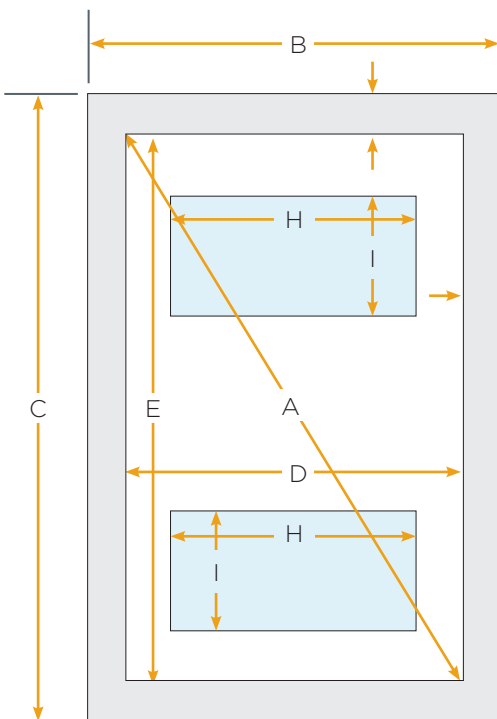

Front of Frame

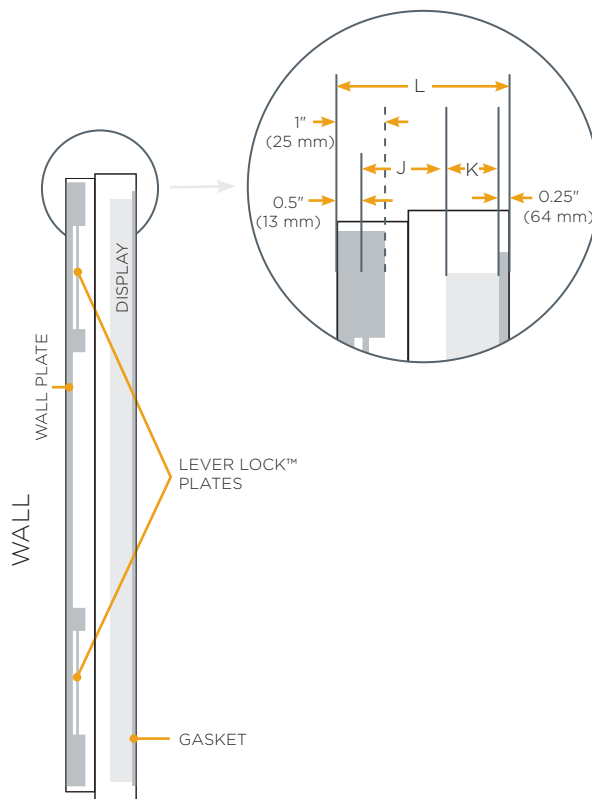

Side of Frame