CHIEF®

PROFESSIONAL AV SOLUTIONS

2016 EMEA Catalog

A MESSAGE FROM CHIEF

We've had another exciting year at Milestone! With our focus on giving you the best experience possible with our products and services, we've added many new items to the catalog as well as exciting new features and functionality online. These new enhancements are based solely on your feedback!

For the last few years, we've interviewed hundreds of AV people from around the world to find out what "being easy to work with" means for them. We were looking to find that next level of service we could provide to make your life easier. We talked to internal and external teams, managers, installers, dealers, purchasers and more in order to find out what we were doing well and what we could do better. The common response was: "Keep doing what you're doing, just do it better!"

A major theme that kept appearing in these interviews was the desire for one consistent experience across Milestone commercial brands, especially the ones you deal with most often like Chief and Da-lite in the U.S. and Projecta in Europe. This means one account, one invoice, and one website for all your information. You wanted to access your account online, including pricing, order tracking and product availability. You wanted automated order status, confirmations via email and quick-turn quotes. And you couldn't have been more right! We understand that you want the same conveniences at work as you do while shopping personally online. And now we're thrilled to bring it to you.

Last May, we launched the new Milestone website experience in North America. And we are happy to announce the expansion of that site to Europe & South America with language options in English, French, Dutch, German, Spanish and Russian. Our customers in Asia will now have all the online searching capabilities, but specific log-in features are yet to come.

Chief, Projecta and Da-Lite are now at milestone.com – a new digital experience with new functionality developed specifically to make life easier for you. Features include enhanced browsing with search and filtering options, product comparisons, drawings, photos, case studies and videos.

Your online Milestone account gives you access to many exclusive features including access to pricing, order status and much more.

If you haven't already done so, head to milestone.com and look around. Other features include enhanced browsing with search and filtering options, product comparisons, drawings, photos, case studies and videos! And as always, continue to give us feedback so we can make it better. There's a feedback button located at the top of the screen.

We're extremely excited to roll out this enhanced digital experience and feel it's one giant step forward to being the easiest partner to do business with in AV.

Laurie Englert
Vice President - Customer Experience

Laurie Englert

A *better* DIGITAL EXPERIENCE

We've been asking customers how we could be a better partner. The resounding answer? Make it easy. No problem!

You can now find all the Milestone AV Technologies brands in one place and get instant access to:

- Online pricing
- Simple purchase process
- Inventory and lead time information
- Freight information
- Order status
- Easy returns
- Purchase and project history
- Translated content in English, French, German, Dutch, Spanish and Russian

Get connected today at Milestone.com.

CONNECTING LEADING BRANDS

YOUR FULL SERVICE AV PARTNER

Milestone AV Technologies is a leading designer and manufacturer of branded audiovisual products including flat panel mounting solutions, projector mounts, projection screens, equipment racks and furniture for AV markets. Milestone's innovative products are sold in the commercial markets under the Chief, Da-Lite and Projecta brand names, and in the consumer markets under the Sanus brand name. All brands work together to provide a breadth of product, strength of longevity, and advantage of superior customer service and support.

milestone™
AV Technologies

OUR COMMERCIAL BRANDS

CHIEF

Chief focuses on commercial AV flat panel and projector mounts. Home Theater, Workstation and Custom Display Solutions are also part of the Chief product offering. Known in the industry for high quality mounts with both Custom and Universal options, as well as an extensive accessories line, Chief is focused on professional installers worldwide.

DA-LITE

For over 100 years, Da-Lite has been designing, manufacturing and marketing the most comprehensive line of projection screens in the world. Today, we offer our widest selection ever of proprietary projection screen fabrics and materials in our history.

PROJECTA

As Europe's leading manufacturer of projection screens, Projecta offers top quality products, intelligent mounting systems and, of course, excellent dealer support. Projecta's strength lies in their primary focus on development and production, allowing them to offer advanced and durable projection screens and furniture to the market.

CERTIFIED PARTNER PROGRAM

INCREASE *your* KNOWLEDGE

with the Chief Certified Partner Program

In 2015 we conducted an extensive survey requesting feedback from the 6,000+ users of our Certified Partners Program. One question asked what is the best part of the program. The overwhelming response: increased Chief product knowledge.

Time after time, we heard how Certification was an easy, engaging way to learn more about Chief solutions, discover installation tips and tricks, and grow as an AV professional. This was great to hear and exactly what we hoped to accomplish with our training!

In addition to product knowledge, the program delivers free industry credits from InfoComm, CEDIA and the Digital Signage Experts Group (DSEG). We also send welcome gifts at 200 Chief points and Visa gift cards at 600 and 1,200 points.

Discover all the benefits and rewards at ***milestone.com/certification*** and start training today!

AWARDS

CONNEXSYS VIDEO WALL MOUNTING SYSTEM

- InAVation Award – InAVation Magazine – 2015
- Excellence in Product Innovation Awards, Installer Friendly Category – NCSA and Commercial Integrator – 2015
- Excellence in Product Innovation Awards, Most Innovative Product – NCSA and Commercial Integrator – 2015
- Most Innovative Mounting Solution – SCN/InfoComm Installation Product Awards – 2015

ALL-IN-ONE-PROJECTOR MOUNT KITS, KITEC

- Best of ISE: Best New Classroom Accessory – rAVe – 2015

SUSPENDED CEILING PROJECTOR SYSTEM, SYSAU

- Commercial Integrator Best Award – 2015

FUSION SERIES MENU BOARD WALL MOUNT, LWM4X1U

- InfoComm Best of Show – Digital Signage Magazine – 2015

K1D SERIES DYNAMIC DESK CLAMP MOUNTS

- ADEX Award – 2015

FAVORITE MOUNT MANUFACTURER

- rAVe Readers' Choice Award – 2015

ONLINE TOOLS

In our continuing effort to be the easiest manufacturing partner to work with, Chief has a host of online tools and resources to make your next project as easy as possible.

RACKBUILDER™

RackBuilder is Chief's intuitive web application for visually configuring rack solutions with an extensive library of accessories and third party components.
milestone.com/rackbuilder

CERTIFIED PARTNER PROGRAM

Thousands of professionals have been using Chief's Certified Partner Program to differentiate their businesses and earn free industry credits in the process. The program is a great way to increase your Chief product knowledge, discover installation best practices and advance your career as an AV professional.
milestone.com/certification

VIDEOS & ANIMATIONS

Learn about our product features and how easy they are to install. View our videos or download them to look at later. They can also be embedded into your presentations or easily forwarded to coworkers.
milestone.com/videos

CHIEF IMAGE LIBRARY

Get all the product shots, application photos and videos you need for your website and marketing collateral on Chief's new Image Library. Register online to gain access!
milestone.tandemvault.com

AV CONSULTANT'S CORNER

Chief's AV Consultant's Corner is our resource for Architects, Consultants and Designers. Chief also provides architects and designers with relevant downloadable documentation for many products – BIM Objects, CAD drawings, tech drawings and manuals. The documents can be found on the downloads tab of all our product pages.
milestone.com/consultantscorner

LITERATURE DOWNLOADS

Find product lines, brochures, new product flyers, whitepapers and application-focused solutions on the Chief literature page, where you can download, print or request copies.
milestone.com/literature

THROW DISTANCE CALCULATOR

Choose from an extensive lists of projectors and adjust room lighting, screen gain, application and diagonal to find the optimum distance for top performance.
milestone.com/projectorcalc

AUTOMATED PRODUCT SERIAL COMMAND CALCULATOR

Find serial commands for Chief's automated solutions by selecting a product and address.
milestone.com/automatedcontrols

TABLE OF CONTENTS

QUICK REFERENCE CHARTS

6 - 7 Projector Mounts

7 - 10 Wall Display Mounts

10 - 12 Ceiling Display Mounts

12 - 14 Freestanding Display Mounts

14 - 17 Monitor Mounts

17 Rack Systems

PROJECTOR MOUNTS

18 - 20 Elite® Series Projector Mounts

21 RPEU® Series Ceiling Mounts

22 Projector Mount System

23 Application Specific Ceiling Projector Mounts

24 - 26 Ceiling Projector Mount Accessories

27 Suspended Ceiling Storage Solutions

28 - 30 Automated Projector Mounts & Accessories

31 - 33 WM Series Short Throw Mounts

34 WP2 Series Short Throw Mounts

35 Application Specific Wall Projector Mounts

WALL DISPLAY MOUNTS

36 - 40 Fusion® Fixed Mounts, ViewShare & Accessories

41 Thinstall™ Fixed Mounts & Accessories

42 Other Fixed Wall Mounts & Accessories

43 - 47 Fusion Tilt Mounts, ViewShare & Accessories

48 Thinstall Tilt Mounts & Accessories

49 Other Tilt Wall Mounts & Accessories

50 - 53 Fusion Menu Board Mounts

54 - 56 ConnexSys™ Video Wall System & Accessories

57 - 59 Fusion Pull-Out Mounts & Accessories

60 - 63 Thinstall Swing Arm Mounts & Accessories

64 Other Swing Arm Mounts & Accessories

CEILING DISPLAY MOUNTS

65 - 67 Fusion Video Wall Mounts

68 - 70 Fusion Menu Board Mounts

80 - 81 Other Ceiling, Truss & Pole Mounts & Accessories

71 - 78 Fusion Ceiling Mounts & Accessories

79 Automated Ceiling Lift Mounts

TABLE OF CONTENTS

FREESTANDING DISPLAY MOUNTS

82 - 89 Fusion Video Wall Mounts & Accessories

90 - 94 Fusion Carts & Stands, ViewShare & Accessories

95 Automated Pop-Up Lift

96 - 98 Other Cart & Stand Mounts & Accessories

99 Table Stand Display Mounts

MONITOR MOUNTS

100 - 104 Kontour™ K1 Dynamic Height Adjust Desk Mounts & Accessories

105 - 107 Kontour K2 Desk Mounts & Accessories

108 - 111 Kontour K3 Static Desk Arrays & Accessories

112 - 115 Kontour K4 Depth-Adjustable Desk Arrays & Accessories

116 - 118 Kontour K1 Series Wall Mounts & Accessories

119 - 120 Kontour K2 Series Wall Mounts & Accessories

121 - 122 Kontour K4 Series Wall Mounts

123 - 124 Kontour K1 Series Pole Mounts & Accessories

125 - 126 Kontour K2 Series Pole Mounts & Accessories

RACK SYSTEMS

127 - 128 Raxxess™ S1 Series Knock Down Racks & Accessories

129 - 130 Raxxess™ S2 Series Knock Down Racks & Accessories

131 - 132 Raxxess G1 Series Gangable Racks & Accessories

133 - 134 Raxxess E1 Series Enclosed Racks & Accessories

135 Raxxess F1 Series Furniture Rack

136 - 138 Raxxess Rotating & Pull-Out Racks & Accessories

139 Raxxess On-Wall Racks

140 - 141 Raxxess Freestanding Racks & Accessories

142 - 143 Other Raxxess Rack Accessories

QUICK REFERENCE CHART

= QUALIFIES FOR LEED CREDIT

CEILING PROJECTOR MOUNTS

Model	Product	Weight Capacity	Roll, Pitch, and Yaw	Dimensions (HxWxD)	Color	Page
KITEC030045		11.3 kg	3°, 15°, 360°	Various	W B	19
KITEC045080		11.3 kg	3°, 15°, 360°	Various	W B	19
KITEC080135		11.3 kg	3°, 15°, 360°	Various	W B	19
RPMEU RPE ELITE® SERIES		22.7 kg	3°, 20°, 360°	69 x 165 x 140 mm	W B	20
RSMEU RPE ELITE SERIES		11.3 kg	3°, 15°, 360°	46 x 111 x 129 mm	W B	20
RPEU RPE SERIES		22.7 kg	4°, 25°, 360°	44 x 165 x 140 mm	W B	21
RSEU RPE SERIES		11.3 kg	3°, 20°, 360°	37 x 111 x 112 mm	W B	21
SYSAUW		15.9 kg	+/-3°, +/-10°, +/-10°	Various	W	22
VCMEU		113.4 kg	5°, 20°, 360°	97 x 432 x 235 mm	B	23
KITMZ006S		11.3 kg	3°, 15°, 360°	Various	S	23

AUTOMATED PROJECTOR MOUNTS

Model	Product	Extension	Weight Capacity	Max Projector Size (HxWxD)	Ceiling Opening (HxWxD)	Ceiling Closure (WxD)	Page
SL220 SMART-LIFT		216 mm	13.6 kg	241 x 419 x 470 mm	284 x 597 x 597 mm	489 x 526 mm	29
SL236i SMART-LIFT		914 mm	15.9 kg	235 x 521 x 578 mm	282 x 648 x 724 mm	607 x 607 mm	29
SL151i SMART-LIFT		211 mm	15.9 kg	213 x 464 x 464 mm	284 x 597 x 597 mm	514 x 515 mm	29

WALL PROJECTOR MOUNTS

Model	Product	Extension	Weight Capacity	Pitch	Lateral Shift	Dimensions (HxWxD)	Page
WM210AUS WM SERIES		S EXTENDS UP TO 495 mm	11.3 kg	±3°	330 mm	293 x 499 x 586 mm	32
WM220AUS WM SERIES		M EXTENDS UP TO 768 mm	11.3 kg	±3°	330 mm	293 x 499 x 904 mm	32
WM230AUS WM SERIES		L EXTENDS UP TO 1,384 cm	11.3 kg	±3°	330 mm	29 x 50 x 151 cm	32

QUICK REFERENCE CHART

= QUALIFIES FOR LEED CREDIT

WALL PROJECTOR MOUNTS

Model	Product	Extension	Weight Capacity	Pitch	Lateral Shift	Dimensions (HxWxD)	Page
WM110AUS WM SERIES		S EXTENDS UP TO 457 mm	11.3 kg	±3°	N/A	360 x 185 x 551 mm	33

Model	Product	Extension	Weight Capacity	Pitch	Lateral Shift	Dimensions (HxWxD)	Page
WM120AUS WM SERIES		M EXTENDS UP TO 724 mm	11.3 kg	±3°	N/A	360 x 185 x 869 mm	33
WM130AUS WM SERIES		L EXTENDS UP TO 1,334 cm	11.3 kg	±3°	N/A	360 x 185 x 1479 mm	33
WP21US WPSERIES		S EXTENDS UP TO 562 mm	11.3 kg	±3°	44 mm	22 x 48 x 62 cm	34
WP22US WPSERIES		M EXTENDS UP TO 968 mm	11.3 kg	±3°	44 mm	22 x 48 x 103 cm	34
WP23US WPSERIES		L EXTENDS UP TO 1,375 cm	11.3 kg	±3°	44 mm	22 x 48 x 143 cm	34
WMA1S WALL MOUNT ACCESSORY		S EXTENDS UP TO 495 mm	Concrete/Wood 68 kg Steel Stud 22.7 kg	N/A	N/A	361 x 185 x 292 mm	35
WMA2S WALL MOUNT ACCESSORY		M EXTENDS UP TO 533 mm	Concrete/Wood 68 kg Steel Stud 22.7 kg	N/A	N/A	292 x 470 x 330 mm	35

FIXED DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Page
XSM1U FUSION® SERIES		XL 55 - 90"	113.4 kg	667 x 1086 x 57 mm	200 x 200 - 1086 x 600	426 mm	25 mm	37
LSM1U FUSION SERIES		L 37 - 80"	90.7 kg	464 x 883 x 51 mm	100 x 100 - 881 x 400	426 mm	25 mm	37
LSA1U FUSION SERIES		L 37 - 80"	90.7 kg	455 x 883 x 51 mm	100 x 100 - 876 x 400	390 mm	N/A	37
MSM1U FUSION SERIES		M 26 - 47"	56.7 kg	464 x 654 x 51 mm	100x 100 - 653 x 400	198 mm	25 mm	38
MSA1U FUSION SERIES		M 26 - 47"	56.7 kg	455 x 654 x 51 mm	100 x 100 - 647 x 400	161 mm	N/A	38
LSTU THINSTALL™ SERIES		L 37 - 63"	56.7 kg	628 x 907 x 10 mm	200 x 200 mm - 800 x 500 mm	N/A	N/A	41
MSTU THINSTALL SERIES		M 26 - 47"	56.7 kg	530 x 706 x 10 mm	100 x 100 mm - 600 x 400 mm	N/A	N/A	41
PSMH MULTIPLE MODELS		XL 60 - 108"	136 kg	635 x 924 x 74 mm	400 x 400 mm - 800 x 400 mm	N/A	N/A	42

QUICK REFERENCE CHART

= QUALIFIES FOR LEED CREDIT

FIXED DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Page
FSRV		S 10 - 32"	20.4 kg	178 x 152 x 19 mm	75 x 75 mm, - 200 x 100 mm	N/A	N/A	42
PAC101		N/A	9.1 kg	55 x 356 x 264 mm	N/A	N/A	N/A	42

TILT DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Tilt	Page
XTM1U FUSION® SERIES		XL 55 - 90"	113.4 kg	68.6 x 123.4 x 5.1 cm	622 x 1086 x 64 mm	542 mm	+5°, -12°	44
LTM1U FUSION SERIES		L 37 - 80"	90.7 kg	432 x 883 x 51 mm	100 x 100 mm - 895 x 505 mm	441 mm	+2°, -12°	44
LTA1U FUSION SERIES		L 37 - 80"	90.9 kg	419 x 883 x 50.8 mm	100 x 100 mm - 895 x 505 mm	441 mm	+2°, -12°	44
MTM1U FUSION SERIES		M 26 - 55"	56.7 kg	432 x 654 x 51 mm	100 x 100 mm - 667 x 400 mm	327 mm	+2°, -12°	45
MTMP1U FUSION SERIES		M 26 - 55"	56.7 kg	622 x 530 x 81 mm	100 x 100 mm - 600 x 460 mm	265 mm	+5°, -12°	45
MTA1U FUSION SERIES		M 26 - 55"	56.7 kg	419 x 654 x 51 mm	100 x 100 mm - 673 x 400 mm	327 mm	+2°, -12°	45
LTTU THINSTALL™ SERIES		L 37 - 80"	45.4 kg	548 x 907 x 19 mm	200 x 200 mm - 800 x 500 mm	N/A	-12°	48
MTTU THINSTALL SERIES		M 26 - 55"	45.4 kg	448 x 706 x 19 mm	100 x 100 mm - 600 x 400 mm	N/A	-12°	48
MWCU		M 26 - 55"	45.4 kg	303 x 487 x 114 mm	100 x 100 mm - 709 x 431 mm	N/A	-15°	49
FTRV		S 10 - 32"	20.4 kg	142 x 141 x 46 mm	75 x 75 mm - 200 x 100 mm	N/A	+5°, -15°	49

MENU BOARD DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt	Page
LWM5X1U		L 40 - 55"	56.7 kg	43 x 490 x 15 cm	any width x 100-400 mm	147-173 mm	20°	51
LWM4X1U		L 40 - 55"	56.7 kg	43 x 399 x 15 cm	any width x 100-400 mm	147-173 mm	20°	51
LWM3X1U		L 40 - 55"	56.7 kg	43 x 276 x 15 cm	any width x 100-400 mm	147-173 mm	20°	51
LWM3X1UP		L 40 - 55"	56.7 kg	43 x 175 x 15 cm	any width x 100-400 mm	147-173 mm	20°	52

QUICK REFERENCE CHART

= QUALIFIES FOR LEED CREDIT

MENU BOARD DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt	Page
LWM2X1U		L 40 - 55"	56.7 kg	43 x 183 x 15 cm	any width x 100-400 mm	147-173 mm	20°	52
LWM2X1UP		L 40 - 55"	56.7 kg	43 x 119 x 15 cm	any width x 100-400 mm	147-173 mm	20°	52

VIDEO WALL DISPLAY

Model	Product	Screen Size	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust	Page
LVS1U CONNEXSYS™ SERIES		L 42 - 80"	68 kg	485 x 903 x 102 mm	200 x 200 - 700 x 400 mm	+4°/-2.5°	± 25 mm	85 mm	55
LVS1UP CONNEXSYS SERIES		L 40 - 80"	68 kg	825 x 496 x 104 mm	200 x 200 - 800 x 400 mm	+4°/-2.5°	± 25 mm	85 mm	55
LVSXU CONNEXSYS SERIES		L 42 - 80"	68 kg	485 x 903 x 102 mm	200 x 200 - 700 x 400 mm	+4°/-2.5°	± 25 mm	85 mm	55
LVSXUP CONNEXSYS SERIES		L 40 - 80"	68 kg	825 x 496 x 104 mm	200 x 200 - 800 x 400 mm	+4°/-2.5°	± 25 mm	85 mm	55
LSMVU FUSION® SERIES		L 37 - 63"	68 kg	533 x 879 x 94 mm	200 x 200 mm - 760 x 505 mm	445 mm	272 mm		57
LSMVPU FUSION SERIES		L 37 - 63"	68 kg	826 x 523 x 94 mm	200 x 200 mm - 800 x 400 mm	102 mm	272 mm		57
MSMVU FUSION SERIES		M 26 - 47"	56.7 kg	419 x 648 x 94 mm	100 x 100 mm - 540 x 400 mm	368 mm	272 mm		58
MSMVPU FUSION SERIES		M 26 - 47"	56.7 kg	620 x 523 x 94 mm	100 x 100 mm - 600 x 400 mm	254 mm	272 mm		58

SWING ARM DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Extension	Page
TS525TU THINSTALL™ SERIES		L 37 - 58"	56.7 kg	527 x 749 x 38 mm	100 x 100 mm - 800 x 400 mm	635 mm	406 mm	61
TS325TU THINSTALL SERIES		M 26 - 52"	34 kg	439 x 749 x 46 mm	100 x 100 mm - 600 x 400 mm	635 mm	406 mm	61
TS318TU THINSTALL SERIES		M 26 - 52"	34 kg	439 x 574 x 46 mm	100 x 100 mm - 600 x 400 mm	457 mm	406 mm	61
TS318SU THINSTALL SERIES		M 26 - 52"	34 kg	343 x 574 x 46 mm	100 x 100 mm - 600 x 400 mm	457 mm	N/A	61
TS218SU THINSTALL SERIES		M 26 - 47"	34 kg	356 x 330 x 38 mm	100 x 100 mm - 400 x 400 mm	457 mm	N/A	62
TS118SU THINSTALL SERIES		S 10 - 32"	15.9 kg	294 x 330 x 38 mm	75 x 75 mm - 200 x 200 mm	457 mm	N/A	62

QUICK REFERENCE CHART

= QUALIFIES FOR LEED CREDIT

SWING ARM DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Extension	Page
TS110SU THINSTALL SERIES		S 10 - 32"	15.9 kg	239 x 356 x 38 mm	75 x 75 mm - 200 x 200 mm	250 mm	N/A	62
PDRUB		L 42 - 80"	90.7 kg	560 x 1003 x 86 mm	200 x 200 mm - 862 x 517 mm	940 mm	229 mm	64
PNRUB		L 42 - 80"	90.7 kg	538 x 687 x 84 mm	200 x 200 mm - 862 x 517 mm	635 mm	229 mm	64

VIDEO WALL DISPLAY CEILING MOUNTS

Model	Product	Screen Size	Configuration	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Page
LCM3X3U FUSION SERIES		L 40 - 55"	3 wide x 3 tall Landscape	38.5 kg	199.6 x 276.3 x 36.8 cm	Any Width x 100 - 400 mm	66
LCM3X2U FUSION SERIES		L 40 - 55"	3 wide x 2 tall Landscape	56.7 kg	138.9 x 276.6 x 36.8 cm	Any Width x 100 - 400 mm	66
LCM3X2UP FUSION SERIES		L 40 - 55"	3 wide x 2 tall Portrait	56.7 kg	199.6 x 174.8 x 36.8 cm	Any Width x 100 - 400 mm	66
LCM2X2U FUSION SERIES		L 40 - 55"	2 wide x 2 tall Landscape	56.7 kg	138.9 x 185.1 x 36.8 cm	Any Width x 100 - 400 mm	67
LCM2X2UP FUSION SERIES		L 40 - 55"	2 wide x 2 tall Portrait	56.7 kg	199.6 x 118.9 x 36.8 cm	Any Width x 100 - 400 mm	67

MENU BOARD DISPLAY CEILING MOUNTS

Model	Product	Screen Size	Configuration	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Page
LCM3X1U FUSION™ SERIES		L 40 - 55"	3 wide Landscape	56.7 kg	42.5 x 276.6 x 20.1 cm	Any Width x 100 - 400 mm	51 mm	68
LCM3X1UP FUSION SERIES		L 40 - 55"	3 wide Portrait	56.7 kg	826 x 175 x 201 mm	Any Width x 100 - 800 mm	51 mm	68
LCB3X1U FUSION™ SERIES		L 40 - 55"	3 wide Back-to-Back Landscape	56.7 kg	42.5 x 276.3 x 29.2 cm	Any Width x 100 - 400 mm	51 mm	69
LCB3X1UP FUSION SERIES		L 40 - 55"	3 wide Back-to-Back Portrait	56.7 kg	82.6 x 174.8 x 29.2 cm	Any Width x 100 - 800 mm	51 mm	69
LCM2X1U FUSION SERIES		L 40 - 55"	2 wide Landscape	56.7 kg	42.7 x 185.1 x 20.1 cm	Any Width x 100 - 400 mm	N/A	69
LCM2X1UP FUSION SERIES		L 40 - 55"	2 wide Portrait	56.7 kg	82.6 x 119 x 20.1 cm	Any Width x 100 - 800 mm	N/A	70
LCB2X1U FUSION SERIES		L 40 - 55"	2 wide Back-to-Back Landscape	45.4 kg	42.5 x 185.1 x 29.6 cm	Any Width x 100 - 400 mm	N/A	70
LCB2X1UP FUSION SERIES		L 40 - 55"	2 wide Back-to-Back Portrait	45.4 kg	82.6 x 119 x 29.6 cm	Any Width x 100 - 800 mm	N/A	70

QUICK REFERENCE CHART

= QUALIFIES FOR LEED CREDIT

CEILING DISPLAY MOUNTS

Model	Product	Screen Size	Configuration	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Page
XCM7000 FUSION SERIES		XL 60 - 90"	Single Landscape	136 kg	425 x 884 x 203 mm	800 x 400 mm	+7.5°/ -20°	71
XCB7000 FUSION SERIES		XL 60 - 90"	Back-to-Back Landscape	136 kg	425 x 884 x 300 mm	800 x 400 mm	+7.5°/ -20°	71
XCM1U FUSION SERIES		XL 60 - 90"	Single Landscape	113.4 kg	425 x 884 x 201 mm	200 x 100 - 800 x 400 mm	+5°, -20°	72
XCB1U FUSION SERIES		XL 60 - 90"	Back-to-Back Landscape	90.7 kg	425 x 884 x 296 mm	200 x 100 - 800 x 400 mm	+5°, -20°	72
LCM1U FUSION SERIES		L 32 - 60"	Single Landscape	56.7 kg	420 x 681 x 162 mm	200 x 100 - 616 x 400 mm	+5°, -20°	72
LCM1UP FUSION SERIES		L 32 - 60"	Single Portrait	56.7 kg	826 x 529 x 162 mm	200 x 100 - 460 x 800 mm	+5°, -20°	73
LCB1U FUSION SERIES		L 32 - 60"	Back-to-Back Landscape	56.7 kg	420 x 681 x 259 mm	200 x 100 - 616 x 400 mm	+5°, -20°	73
LCB1UP FUSION SERIES		L 32 - 60"	Back-to-Back Portrait	56.7 kg	826 x 529 x 259 mm	200 x 100 - 460 x 800 mm	+5°, -20°	73
LCM1X2U FUSION SERIES		L 32 - 60"	1 wide x 2 tall Single-Sided Landscape	56.7 kg	420 x 681 x 162 mm	200 x 100 - 616 x 400 mm	+5°, -20°	74
LCB1X2U FUSION SERIES		L 32 - 60"	1 wide x 2 tall Back-to-Back Landscape	45.3 kg	420 x 681 x 259 mm	200 x 100 - 616 x 400 mm	+5°, -20°	74
LCM4U FUSION® SERIES		L 32 - 65"	Quad Mount	38 kg	47.5 142.2 x 142.2 cm	200 x 200 - 600 x 400 mm	+5°, -20°	74
LCM3U FUSION SERIES		L 32 - 65"	Triple Mount	57 kg	46.2 118.4 x 118.4 cm	200 x 200 - 600 x 400 mm	+5°, -20°	74
MCM1U FUSION SERIES		M 26 - 50"	Single Landscape or Portrait	56.7 kg	420 x 529 x 162 mm	200 x 100 - 460 x 400 mm	+5°, -20°	75
MCB1U FUSION SERIES		M 26 - 50"	Back-to-Back Landscape	56.7 kg	419 x 529 x 259 mm	200 x 100 - 460 x 400 mm	+5°, -20°	75
MCM1X2U FUSION SERIES		M 26 - 50"	1 wide x 2 tall Single-Sided Landscape	56.7 kg	419 x 529 x 162 mm	200 x 100 - 460 x 400 mm	+5°, -20°	75
MCB1X2U FUSION SERIES		M 26 - 50"	1 wide x 2 tall Back-to-Back Landscape	45.3 kg	420 x 529 x 259 mm	200 x 100 - 460 x 400 mm	+5°, -20°	75

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Page
CM2C40UI AUTOMATED		L 32 - 61"	86.2 kg	794 x 603 x 197 mm	200 x 200 - 862 x 517 mm	N/A	79
TPSU		L 42 - 71"	68 kg	412 x 433 x 27 mm	200 x 200 - 862 x 517 mm	N/A	80

QUICK REFERENCE CHART

= QUALIFIES FOR LEED CREDIT

CEILING DISPLAY MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Page
TPMU		L 42 - 71"	68 kg	412 x 433 x 86 mm	200 x 200 mm - 862 x 517 mm	±15°	80
JPPU		M 26 - 45"	34 kg	189 x 152 x 89 mm	100 x 100 mm - 400 x 400 mm	±15°	80
K0P100B		S 10 - 30"	18.14 kg	114.3 x 193 x 121.9 mm	75 x 75 mm - 100 x 100 mm	+75°, -10°	80

FREESTANDING VIDEO WALL DISPLAY MOUNTS

Model	Product	Screen Size	Configuration	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Page
LVM3X3U FUSION SERIES		L 42 - 46"	3 wide x 3 tall Freestanding Landscape	45.4 kg	235 x 274.3 x 102.6 cm	Any Width x 100 - 400 mm	19 mm	83
LBM3X3U FUSION SERIES		L 42 - 46"	3 wide x 3 tall Bolt-down Landscape	45.4 kg	231 x 277 x 23.9 cm	Any Width x 100 - 400 mm	19 mm	83
LVM3X2U FUSION SERIES		L 42 - 46"	3 wide x 2 tall Freestanding Landscape	56.7 kg	189.3 x 274.3 x 102.6 cm	Any Width x 100 - 400 mm	19 mm	83
LVM3X2UP FUSION SERIES		L 42 - 46"	3 wide x 2 tall Freestanding Portrait	45.4 kg	271 x 172.7 x 102.6 cm	100 - 800 mm x Any Height	19 mm	83
LBM3X2U FUSION SERIES		L 42 - 46"	3 wide x 2 tall Bolt-down Landscape	56.7 kg	185.2 x 276.6 x 23.9 cm	Any Width x 100 - 400 mm	19 mm	84
LBM3X2UP FUSION SERIES		L 42 - 46"	3 wide x 2 tall Bolt-down Portrait	45.4 kg	250.4 x 172.7 x 24.4 cm	100 - 800 mm x Any Height	19 mm	84
LVM3X1UP FUSION SERIES		L 42 - 46"	3 wide x 1 tall Freestanding Portrait	56.7 kg	225.3 x 172.7 x 102.6 cm	100 - 800 mm x Any Height	19 mm	84
LBM3X1UP FUSION® SERIES		L 42 - 46"	3 wide x 1 tall Bolt-down Portrait	56.7 kg	204.7 x 172.7 x 24.4 cm	100 - 800 mm x Any Height	19 mm	84
LBM1X3U FUSION SERIES		L 42 - 65"	1 wide x 3 tall Bolt-down Landscape	56.7 kg	2145 x 914 x 191 mm	100 x 100 mm – 900 x 400 mm	19 mm	85
LVM2X2U FUSION SERIES		L 42 - 50"	2 wide x 2 tall Freestanding Landscape	56. 7 kg	2045 x 1842 x 1026 mm	Any Width x 100 - 400 mm	19 mm	85
LVM2X2UP FUSION SERIES		L 42 - 50"	2 wide x 2 tall Freestanding Portrait	45.4 kg	271 x 116.8 x 102.6 cm	100 - 800 mm x Any Height	19 mm	85
LBM2X2U FUSION SERIES		L 42 - 50"	2 wide x 2 tall Bolt-down Landscape	56. 7 kg	185.2 x 185.2 x 23.9 cm	Any Width x 100 - 400 mm	19 mm	85
LBM2X2UP FUSION SERIES		L 42 - 50"	2 wide x 2 tall Bolt-down Portrait	45.4 kg	250.4 x 116.8 x 24 cm	100 - 800 mm x Any Height	19 mm	86
LBM1X2U FUSION SERIES		L 42 - 80"	1 wide x 2 tall Bolt-down Landscape	56.7 kg	1689 x 914 x 191 mm	100 x 100 mm – 900 x 400 mm	19 mm	86
LBM1X2UP FUSION SERIES		L 42 - 80"	1 wide x 2 tall Bolt-down Portrait	56.7 kg	2145 x 914 x 191 mm	100 x 100 mm – 800 x 900 mm	19 mm	86

QUICK REFERENCE CHART

= QUALIFIES FOR LEED CREDIT

FREESTANDING VIDEO WALL DISPLAY MOUNTS

Model	Product	Screen Size	Configuration	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Page
XBM1U FUSION SERIES		XL 42 - 80"	1 wide x 1 tall, Bolt-down, Landscape	113 kg	2143 x 914 x 191 mm	100 x 100 mm – 900 x 400 mm	19 mm	86
XBM1UP FUSION SERIES		XL 42 - 80"	1 wide x 1 tall, Bolt-down, Portrait	113 kg	2083 x 914 x 191 mm	100 x 100 mm – 800 x 900 mm	19 mm	87

FREESTANDING DISPLAY MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Page
XVAU FUSION SERIES		XL 37 - 70"	113 kg	139.5 x 98.6 x 73.7 cm	200 x 200 - 800 x 400 mm	106.4 - 128 cm	±2.5°	90
XPAU FUSION SERIES		XL 55 - 100"+	136 kg	187.7 x 147.2 x 87.8 cm	200 x 200 - 800 x 400 mm	121.3 - 166.2 cm	±5°	90
LPAU FUSION SERIES		L 40 - 80"	90.7 kg	180.1 x 114.3 x 84.4 cm	200 x 200 - 800 x 400 mm	127.1 - 177.9 cm	±5°	91
LFAU FUSION SERIES		L 40 - 80"	90.7 kg	183.9 x 96.8 x 77.7 cm	200 x 200 - 800 x 400 mm	113 - 164 cm	±5°	91
MPAU FUSION SERIES		M 37 - 55"	56. 7 kg	197.9 x 121.4 x 81.3 cm	200 x 100 - 600 x 400 mm	127 - 177 cm	±5°	91
MFAU FUSION SERIES		M 37 - 55"	56. 7 kg	183.9 x 96.8 x 77.7 cm	200 x 100 - 600 x 400 mm	113 - 163 cm	±5°	91

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Maximum Extension	Overall Travel	Page
CM2L40 AUTOMATED		L 32 - 61"	86.2 kg	77.8 x 60.3 x 19.5 cm	200 x 200 - 862 x 517 mm	180.3 cm	101.6 cm	95

Model	Product	Screen Size	Weight Cap. (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Page
PFCU		L 42 - 71"	90.7 kg	207.3 x 94.3 x 81.6 cm	200 x 200 - 862 x 517 mm	122 - 183 cm	±15°	96
PF1U		L 42 - 71"	90.7 kg	238.8 x 91.4 x 76.2 cm	200 x 200 - 862 x 517 mm	130 - 217 cm	±15°	96
MFCU		M 30 - 55"	56.7 kg	197.5 x 94.3 x 81.6 cm	100 x 100 - 709 x 431 mm	122 - 183 cm	±15°	96
MF1U		M 30 - 55"	56.7 kg	232.7 x 91.4 x 76.2 cm	100 x 100 - 709 x 431 mm	130 - 218 cm	±15°	97

TABLE STAND DISPLAY MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust	Swivel Options	Page
STLU		M 32 - 52"	56.7 kg	603 x 698 x 140 mm	100 x 100 - 600 x 400 mm	N/A	15°, 30°, 45° or 90°	99

QUICK REFERENCE CHART

= QUALIFIES FOR LEED CREDIT

TABLE STAND DISPLAY MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust	Swivel Options	Page
PTSU		M 30 - 50"	45.4 kg	545 x 607 x 278 mm	200 x 200 – 860 x 515 mm	102 mm	N/A	99
STS1		S 18 - 30"	13.6 kg	409 x 152 x 175 mm	75 x 75 - 100 x 100 mm	130 mm	90˚, 180˚, 270˚	99

DESK MONITOR MOUNTS

Model	Product	Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors	Page
K1C220 KONTOUR™ SERIES		90 mm	523 mm	2.3 - 9.9 kg	S B	101
K1C210 KONTOUR SERIES		62 mm	352 mm	2.3 - 11.3 kg (per monitor)	S B	101
K1C22H KONTOUR SERIES		166 mm	597 mm	0.9 - 4.1 kg	S B	101
K1C120 KONTOUR SERIES		140 mm	571 mm	2.3 - 9.9 kg	S B	101
K1C110 KONTOUR SERIES		62 mm	400 mm	2.3 - 11.3 kg (per monitor)	S B	102
K1D230 KONTOUR SERIES		62 mm	714 mm	2.3 - 4.54 kg (per monitor)	S B	102
K1D220 KONTOUR SERIES		105 mm	548 mm	2.3 - 11.3 kg	S B	102
K1D22H KONTOUR SERIES		118 mm	549 mm	0.9 - 4.1 kg	S B	102
K1D130 KONTOUR SERIES		62 mm	648 mm	2.3 - 4.54 kg (per monitor)	S B	103
K1D120 KONTOUR SERIES		92 mm	523 mm	2.3 - 11.3 kg	S B	103

Model	Product	Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors	Page
K2C220 KONTOUR SERIES		105 mm	448 mm	9.9 kg	S B	105
K2C22H KONTOUR SERIES		166 mm	509 mm	0.9 - 4.1 kg	S B	105
K2C120 KONTOUR SERIES		152 mm	495 mm	9.9 kg	S B	106
K2C110 KONTOUR SERIES		152 mm	324 mm	9.9 kg	S B	106

(Silver displays shown with Apple® Cinema Display adapter, not included.)

QUICK REFERENCE CHART

= QUALIFIES FOR LEED CREDIT

DESK MONITOR MOUNTS

Model	Product	Center of Display to Floor/Table Range	Maximum Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Capacity (per monitor)	Color	Page
K3F220B KONTOUR™ SERIES		460 mm	736 mm	±12°	10 - 27"	6.8 kg	B	109
K3G220B KONTOUR SERIES		460 mm	736 mm	±12°	10 - 27"	6.8 kg	B	109
K3G320B KONTOUR SERIES		460 mm	2 x 2: 1301 mm 3 x 2: 650 mm	±12°	10 - 30"	6.8 kg	B	109
K3F310B KONTOUR SERIES		N/A	Dual: 1301 mm Triple: 650 mm	Outer - ±12° Center - ±10°	Dual: up to 30" Triple: up to 27"	6.8 kg	B	110
K3G310B KONTOUR SERIES		N/A	Dual: 1301 mm Triple: 650 mm	Outer - ±12° Center - ±10°	Dual: up to 30" Triple: up to 27"	6.8 kg	B	110
K3F120B KONTOUR SERIES		460 mm	N/A	±10°	10 - 30"	6.8 kg	B	110
K3G120B KONTOUR SERIES		460 mm	N/A	±10°	10 - 30"	6.8 kg	B	110
K4G610B KONTOUR SERIES		291 - 463 mm	614 mm	815 mm	up to 24"	6.8 kg	B	112
K4G510B KONTOUR SERIES		291 - 463 mm	614 mm	592 mm	up to 24"	6.8 kg	B	112
K4G410B KONTOUR SERIES		291 - 463 mm	614 mm	396 mm	up to 24"	6.8 kg	B	113
K4G310B KONTOUR SERIES		291 - 463 mm	614 mm	239 mm	up to 24"	6.8 kg	B	113
K4G210B KONTOUR SERIES		291 - 463 mm	943 mm	239 mm	up to 24"	6.8 kg	B	113
K4G120B KONTOUR SERIES		291 - 463 mm	406 mm	239 mm	up to 24"	6.8 kg	B	113
K4G620 KONTOUR SERIES		269 - 1107 mm	584 mm	815 mm	up to 24"	6.8 kg	B	114
K4G520 KONTOUR SERIES		269 - 1107 mm	584 mm	592 mm	up to 24"	6.8 kg	B	114
K4G420 KONTOUR SERIES		269 - 1107 mm	584 mm	396 mm	up to 24"	6.8 kg	B	114
K4G320 KONTOUR SERIES		269 - 1107 mm	584 mm	318 mm	up to 24"	6.8 kg	B	114

(Silver displays shown with Apple® Cinema Display adapter, not included.)

QUICK REFERENCE CHART

= QUALIFIES FOR LEED CREDIT

WALL MONITOR MOUNTS

Model	Product	Minimum Depth from Wall	Maximum Extension	Tilt	Weight Capacity (per monitor)	Colors	Page
K1W220 KONTOUR SERIES		62 mm	525 mm	+75°, -10°	2.3 - 11.3 kg	B	117
K1W120 KONTOUR SERIES		62 mm	512 mm	+75°, -10°	2.3 - 11.3 kg	S B	117
K1W110 KONTOUR SERIES		62 mm	341 mm	+75°, -10°	2.3 - 11.3 kg	B	117
K2W120 KONTOUR SERIES		74 mm	437 mm	±15°	18.1 kg	S B	119

Model	Product	Minimum Depth from Wall	Maximum Extension	Tilt	Weight Capacity (per monitor)	Colors	Page
K0W100		66 mm	N/A	+75°, -10°	11.3 kg	S B	120

Model	Product	Max. Monitor Width	Extension	Minimum Depth	Arm Rotation	Typical Screen Size	Tilt	Weight Cap. (per monitor)	Page
K4W310B KONTOUR SERIES		614 mm	412 mm	239 mm	0 - 20°	up to 24"	±12°	6.8 kg	121
K4W210B KONTOUR SERIES		943 mm	412 mm	239 mm	0 - 20°	up to 30"	±12°	6.8 kg	121
K4W120B KONTOUR SERIES		406 mm	412 mm	94 mm	0 - 20°	up to 24"	±10°	6.8 kg	122

POLE MONITOR MOUNTS

Model	Product	Minimum Depth from Pole	Maximum Extension	Tilt	Weight Capacity (per monitor)	Colors	Page
K1P220 KONTOUR SERIES		62 mm	510 mm	+75°, -10°	2.3 - 11.3 kg	B	123
K1P120 KONTOUR SERIES		64 mm	493 mm	+75°, -10°	2.3 - 11.3 kg	S B	123
K2P120 KONTOUR SERIES		74 mm	422 mm	±15°	18.1 kg	B	125

Model	Product	Minimum Depth from Pole	Typical Screen Size	Tilt	Weight Capacity	Colors	Page
K0P100		66 mm	10 – 30"	+75°, -10°	18. 1 kg	S B	126

QUICK REFERENCE CHART

= QUALIFIES FOR LEED CREDIT

RACK SYSTEMS

Model	Product	Available Depths	Available Heights	Page
S1 SERIES KNOCK DOWN RACKS		584 or 711 mm Depths	12, 20, 28, 36, 41 or custom space	127 - 128
S2 SERIES KNOCK DOWN RACKS		508 mm Depth	15 or 20 space	129 - 130
G1 SERIES GANGABLE RACKS		584 or 838 mm Depths	28, 36 or 44 space	131 - 132
E1 SERIES ENCLOSED RACKS		584 or 711 mm Depths	20, 28, 36 or 44 space	133 - 134
F1 SERIES FREESTANDING RACKS		508 mm Depth	12, 20 or 28 space	135
ROTR ROTATING RACKS		480 mm Depth	8 or 24 space	137
ROTR-XL ROTATING RACKS		582 mm Depth	8 or 24 space	137
ROTR-HD ROTATING RACKS		597 mm Depth	24 - 44 or custom space	137
POTR & POTR-XL PULL-OUT RACKS		467 or 533 mm Depths	8 or 24 space	137
W2 SERIES FIXED WALL RACKS		420 mm Depth	8 or 12 space	139
ER FREESTANDING RACKS		406 or 457 mm Depths	4 - 20 space	140
ERK FREESTANDING RACKS		406 or 508 mm Depths	4 - 16 space	140

CEILING PROJECTOR MOUNTS

ELITE® SERIES PROJECTOR MOUNT
FEATURES

MICROZONE™ ADJUSTMENTS
Designed with MicroZone Adjustments to make projector registration fast and precise.

CENTRIS® TECHNOLOGY
Enables effortless fingertip positioning and self-adjusts to support different projector weights.

CABLE MANAGEMENT
Route cables through the top of the mount without additional accessories.

QUICK CONNECT/DISCONNECT
Disconnecting maintains registration without affecting pre-set adjustments.

SECURITY
Keyed locking and steel-into-steel locking hardware at all connection points to protect against theft.

MULTIPLE CONNECTION OPTIONS
Mounting options include: CPAE pin connection column system, CMS threaded column system, 6mm threaded rods, and flush mounting to the ceiling.

KITEC030045 ALL-IN-ONE PROJECTOR MOUNT KIT

Chief's projector kits offer convenient flexibility with a super sleek design and even quicker installation. Bundled kit includes:

- RSMEU Mini Elite® Universal Projector Mount
- CPA116 Flat Ceiling Plate
- 300–450 mm Telescoping Column

Weight Capacity	Roll, Pitch and Yaw	Extension	Dimensions (LxWxH)	Colors
11.3 kg	3°, 15°, 20°	300 – 450 mm	144 x 144 x 535 mm	W B

KITEC045080 ALL-IN-ONE PROJECTOR MOUNT KIT

Chief's projector kits offer convenient flexibility with a super sleek design and even quicker installation. Bundled kit includes:

- RSMEU Mini Elite® Universal Projector Mount
- CPA116 Flat Ceiling Plate
- 450–800 mm Telescoping Column

Weight Capacity	Roll, Pitch and Yaw	Extension	Dimensions (LxWxH)	Colors
11.3 kg	3°, 15°, 20°	500 – 800 mm	144 x 144 x 885 mm	W B

KITEC080135 ALL-IN-ONE PROJECTOR MOUNT KIT

Chief's projector kits offer convenient flexibility with a super sleek design and even quicker installation. Bundled kit includes:

- RSMEU Mini Elite® Universal Projector Mount
- CPA116 Flat Ceiling Plate
- 800–1350 mm Telescoping Column

Weight Capacity	Roll, Pitch and Yaw	Extension	Dimensions (LxWxH)	Colors
11.3 kg	3°, 15°, 20°	800 – 1350 mm	144 x 144 x 1435 mm	W B

RPMEU ELITE® PROJECTOR MOUNT

Chief's elite ceiling projector mounts are packed with easy-to-use features that save time and provide projector security.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
22.7 kg	3°, 20°, 360°	69 x 165 x 140 mm	W B

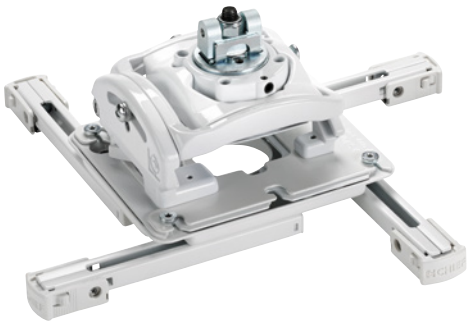

RSMEU MINI ELITE™ PROJECTOR MOUNT

Ideal for smaller projector models, these miniature versions of the Elite mounts include all the same great features in almost half the size.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
11.3 kg	3°, 15°, 360°	46 x 111 x 129 mm	W B

RPEU® SERIES CEILING MOUNTS
FEATURES

INDEPENDENT ADJUSTMENTS
Includes roll, pitch and yaw adjustments for quick and precise projector alignment.

QUICK CONNECT/DISCONNECT
Disconnecting maintains registration without affecting pre-set adjustments.

CABLE MANAGEMENT
Route cables through the top of the mount without additional accessories.

ALL-POINTS SECURITY
Exclusive steel-into-steel locking hardware at all connection points to protect against theft.

MULTIPLE CONNECTION OPTIONS
Mounting options include: CPAE pin connection column system, CMS threaded column system, 6 mm threaded rods and flush mounting to ceiling.

RPEU PROJECTOR MOUNT

Chief's standard ceiling projector mount is installed in more offices, schools and homes worldwide than any other mount.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
22.7 kg	4°, 25°, 360°	44 x 165 x 140 mm	W B

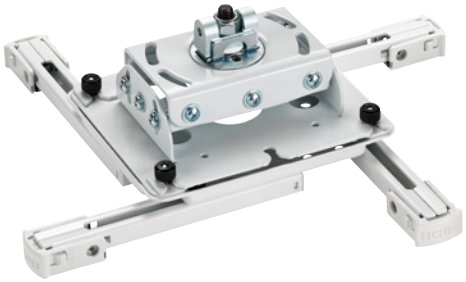

RSEU MINI RPE PROJECTOR MOUNT

Ideal for smaller projector models, these miniature versions of the RPEU mounts include all the same great features in almost half the size.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
11.3 kg	3°, 20°, 360°	37 x 111 x 112 mm	W B

PROJECTOR MOUNT SYSTEM
FEATURES

ADJUSTABLE CEILING PLATE
Allows placement above or below tile and accommodates inconsistent T-grids.

TOOL-FREE ADJUSTMENTS
Tool-Free Microzone and Centris technology make projector registration fast and precise with macro and micro adjustments.

HEIGHT ADJUSTABLE COLUMN
Column instantly adjusts from 0 to 305 mm, eliminating the need to specify column length.

CABLE MANAGEMENT
Separate lay-in channels for high and low voltage cables without additional accessories.

COMPLETE SOLUTION
Single SKU system includes everything required for suspended ceiling mounting and comes out of the box ready to install.

SYSAU PROJECTOR MOUNT SYSTEM

The improved ceiling plate, column system, mount and universal interface of the SYSAU Projector Mount System are designed to cut installation time by one-third.

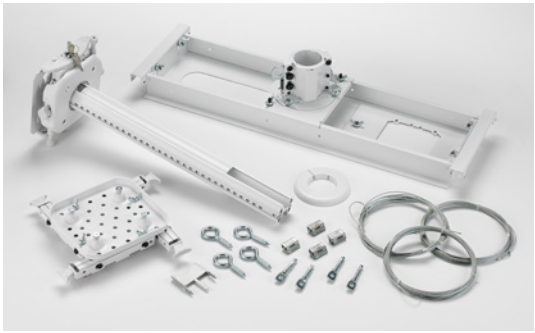

	Weight Capacity	Dimensions (HxWxD)	Projector Travel from Ceiling	Colors
SYSAU	15.9 kg	504 x 634 x 184 mm	80 x 374 mm in 13 mm increments	W

	Dimensions (HxWxD)	Roll, Pitch, Yaw
Mount*	45 x 178 x 177 mm	±3°, ±10°, ±10°

** Dimensions for mount without column or interface.*

	Dimensions (HxWxD)	Height Adjust	Column Rotation	Column Shift
Ceiling Plate	117 x 634 x 184 mm	26 mm	360°	234 mm

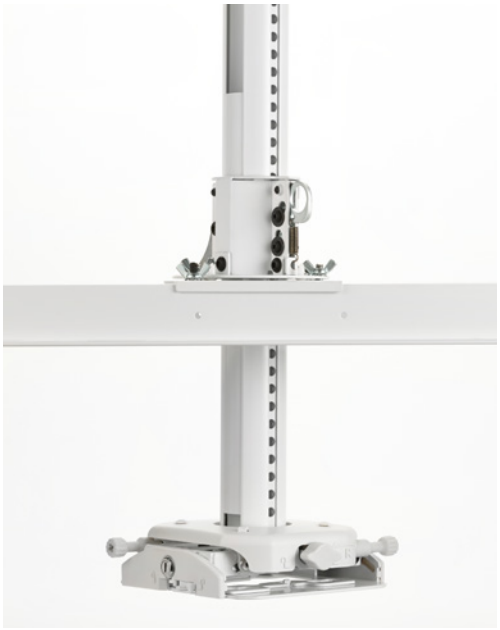

APPLICATION SPECIFIC
CEILING PROJECTOR MOUNTS

VCMEU HEAVY DUTY MOUNT

Heavy-duty steel mount for mounting heavy projectors.
Micro adjustments allow you to quickly achieve registration.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Color
113.4 kg	5°, 20°, 360°	97 x 432 x 235 mm	B

KITMZ006S SUSPENDED CEILING KIT

Weight Capacity	Colors
11.3 kg	S

Bundled kit includes:
- RSMAUS Mini Elite® Universal Projector Mount
- CMSZ006S Fully Threaded Extension Column
- CMS440 Lightweight Suspended Ceiling Kit

Fits standard 600 x 600 ceiling tiles.

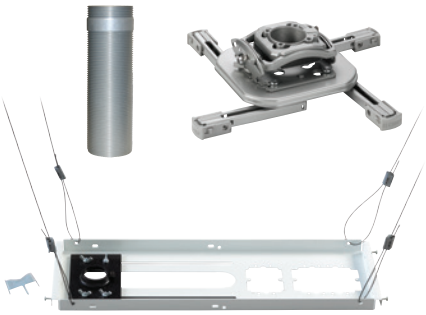

PIN CONNECTION PROJECTOR MOUNT
ACCESSORIES

CPA116	Weight Capacity	Colors
Flat Ceiling Plate	34 kg	W B

CPA330	Weight Capacity
Pin Connection Offset Ceiling Plate	226.8 kg

CPA365	Weight Capacity
Pin Connection Pole and Truss Adapter	226.8 kg

CPA395	Weight Capacity
Pin Connection Angled Ceiling Plate	226.8 kg

CPA263	Weight Capacity	Colors
CPA Column to CPA Column Connector	226.8 kg	W B

CPA264	Weight Capacity
Pin Connection Coupler	226.8 kg

CMA345	Weight Capacity
Structural Ceiling Plate	226.8 kg

CPAE Columns	Weight Capacity
Fixed, pin-connection extension columns available in black and white*	226.8 kg

Model	Length
CPAE030	300 mm
CPAE080	800 mm
CPAE100	1000 mm
CPAE150	1500 mm
CPAE300	3000 mm

** All part numbers listed are black. To order white add W to the end of the part number.*

CPA640	Compatibility	Colors
Decorative Tile Ring	Threaded & CPA Columns	W B

CMA274	Colors
Quick-Snap Cable Cover – 1219 mm long	W B

THREADED PROJECTOR MOUNT
ACCESSORIES

CMS115	Colors	Weight Capacity
Speed-Connect™ Ceiling Plate	W B	226.8 kg

CMA330	Weight Capacity
Offset Ceiling Plate – 203 mm	226.8 kg

CMA395	Colors	Weight Capacity
Angled Ceiling Plate	B W	226.8 kg

CMA347	Weight Capacity
Vibration Isolating Coupler	15.9 kg

THREADED PROJECTOR MOUNT
ACCESSORIES

CMS440	Weight Capacity
Speed-Connect Above-Tile Suspended Ceiling Kit	22.7 kg

CMA640	Compatibility	Colors
Decorative Ring, 48 mm ID	Threaded & CPA Columns	W C B

CMA643	Compatibility
Decorative Ring, 62 mm ID - Silver	CMS Outer Adjustable Columns



CMA351	Weight Capacity
Heavy Duty Swivel Adapter	226.8 kg

CMA110	Colors	Weight Capacity
Ceiling Plate – 203 mm	W B	226.8 kg

CMSZ006	Colors	Weight Capacity
152 mm Fully Threaded Column	S	226.8 kg

CMS Fixed Columns	Weight Capacity
Fixed 1 ½" NPT extension columns available in black, silver and white†	500 lbs (226.8 kg)

Model	Length	Model	Length
CMS003*	3" (76 mm)	CMS024	2' (0.6 m)
CMS006*	6" (152 mm)	CMS036	3' (0.9 m)
CMS009	9" (229 mm)	CMS048	4' (1.2 m)
CMS012	12" (305 mm)	CMS060	5' (1.5 m)
CMS018	18" (457 mm)	CMS072	6' (1.8 m)

† All part numbers listed are black. To order white add a W to the end of the part number.

CMS Adjustable Columns	Weight Capacity
Adjustable threaded extension columns available in black and white*	226.8 kg

Model	Length	Model	Length
CMS006009	152 - 229 mm	CMS0203	0.6 - 0.9 m
CMS009012	229 - 305 mm	CMS0305	0.9 - 1.5 m
CMS012018	305 - 457 mm	CMS0406	1.2 - 1.8 m
CMS018024	457 - 610 mm	CMS0507	1.5 - 2.1 m

** All part numbers listed are black. To order white add a W to the end of the part number.*

CEILING PROJECTOR MOUNT
ACCESSORIES

PG1A	Max Equipment Size (HxWxD)	Colors
Large Projector Guard	191 x 508 x 518 mm	B W

PG2A	Max Equipment Size (HxWxD)	Colors
Small Projector Guard	191 x 406 x 406 mm	B W

PG3A	Max Equipment Size (HxWxD)	Colors
Extra Large Projector Guard	288 x 635 x 633 mm	B W

HC1	Includes
Heavy-Duty Cable system	SA1, cable, padlock, security pads, super glue

LC1	Includes
Security Cable Lock Kit	Coiled cable, padlock, security pads, super glue

SLBLEG	Compatibility	Colors
Extra Large Projector Guard	RPE, RPME, RSE and RSME Series	B W



SEC2	Compatibility
Security Cable Kit for SLBU	RPE, RPME, RSE and RSME Series

LCD2C	Compatibility
Dual Projector Ceiling Stacker	Requires two RPE or RPME projector mounts

LCD2TS	Compatibility
Dual Projector Table Stand Stacker	Requires two RPE or RPME projector mounts

LCDPA	Compatibility
Stacker Arm	RPE and RPME projector mounts

LCDCP	Weight Capacity
Stacker Ceiling Plate	45.4 kg

SUSPENDED CEILING STORAGE SOLUTIONS
FEATURES

DROP-DOWN ACCESS
Unique feature lowers the entire frame enough to slide the ceiling tile out of the way for servicing.

PERFECT PLACEMENT
Maximized column location within tile space for less reliance on digital adjustments and lens shift.

CONVENIENT PRELOADING
AV components can be preloaded to shelf before bringing it to the ceiling.

THERMAL MANAGEMENT
Passive cooling vents help with thermal management and an accessory fan is available for active cooling.

CMS491	Weight Capacity
Half Tile Plenum Storage Box	45 kg

CMS491C	Weight Capacity
Half Tile Plenum Storage Box w/ Column Drop	45 kg

CMS492	Weight Capacity
Full Tile Plenum Storage Box	45 kg

CMS492C	Weight Capacity
Full Tile Plenum Storage Box w/ Column Drop	45 kg

AUTOMATED
PROJECTOR MOUNTS

AUTOMATED PROJECTOR MOUNTS
FEATURES

QUIET OPERATION
Provides exceptionally smooth and quiet movement, making it a great option for homes and corporate offices.

MULTIPLE CONTROL OPTIONS
Choose from single push-button, low-voltage controller and IR options. Also accepts 5-30V AC/DC for triggering commands. AMX/Crestron control compatibility.

SAFE & SUSTAINABLE
CE, UL, TUV, FC and WEEE certifications recognize safe design and environmentally friendly construction.

MULTIPLE INSTALLATION OPTIONS
Multiple mounting options for finished and suspended ceilings including threaded extension columns, threaded rods and suspension cables.

SL220 SMART-LIFT

Simple 3-step installation process requires only one person. Designed to fit 600 x 600 mm ceiling tiles.

Weight Capacity	Extension	Max Projector Size (HxWxD)	Ceiling Opening (HxWxD)	Ceiling Closure (WxD)
13.6 kg	216 mm	241 x 419 x 470 mm	284 x 597 x 597 mm	489 x 526 mm

RSMEUW projector mount is required. Remote control and IR eye are included.

SL236I SMART-LIFT

Provides 914 mm of downward travel with three stopping positions. Includes adjustments for precise positioning. Order SL236SPI for suspended ceiling installations and SL236FDI for fixed/structured ceiling installations.

Weight Capacity	Extension	Max Projector Size (HxWxD)	Ceiling Opening (HxWxD)	Ceiling Closure (WxD)
15.9 kg	914 mm	235 x 521 x 578 mm	282 x 648 x 724 mm	607 x 607 mm

SLBUW Interface is required. Remote control and IR eye are not included.

SL151I SMART-LIFT

Provides exceptionally smooth and quiet movement. Great for suspended and finished ceilings in homes and corporate offices.

Weight Capacity	Extension	Max Projector Size (HxWxD)	Ceiling Opening (HxWxD)	Ceiling Closure (WxD)
15.9 kg	211 mm	213 x 464 x 464 mm	284 x 597 x 597 mm	514 x 515 mm

SLBUW Interface is required. Remote control and IR eye are not included.

AUTOMATED PROJECTOR MOUNT
ACCESSORIES

IR10	Compatibility
Infrared Remote Control*	SL151, SL236 and SL220

**Included with SL220i*

WALL
PROJECTOR MOUNTS

WM SERIES SHORT THROW MOUNTS
FEATURES



PERCISION HEIGHT & LEVELING

VARIABLE EXTENSION OPTIONS

PRECISION HEIGHT AND LEVELING
Industry-first micro height and leveling adjustment.

FAST INSTALLATION
Innovative quick-connect system for a speedy install.

INTEGRATED CABLE MANAGEMENT
Fully internal cable management system conceals and protects cables for a clean finish.

VARIABLE EXTENSION OPTIONS
Telescoping extension and infinite projector placement make it easy to achieve a picture perfect installation.

MULTIPLE INSTALLATION OPTIONS
Designed for mounting to concrete, block wall, wood or steel studs. Hardware Included.

WM210AUS EXTENDS UP TO 495 mm

Small dual stud short throw mount. Includes Mini Elite® Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	330 mm	293 x 499 x 586 mm

WM220AUS EXTENDS UP TO 768 mm

Medium dual stud short throw mount. Includes Mini Elite Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	330 mm	293 x 499 x 904 mm

WM230AUS EXTENDS UP TO 1384 mm

Large dual stud short throw mount. Includes Mini Elite Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	330 mm	293 x 499 x 1513 mm

WM110AUS EXTENDS UP TO 457 mm

Small single stud short throw mount. Includes Mini Elite® Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	N/A	360 x 185 x 551 mm

WM120AUS EXTENDS UP TO 724 mm

Medium single stud short throw mount. Includes Mini Elite Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	N/A	360 x 185 x 869 mm

WM130AUS EXTENDS UP TO 1334 mm

Large single stud short throw mount. Includes Mini Elite Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	N/A	360 x 185 x 1479 mm

WP2 SERIES SHORT THROW MOUNT

FEATURES

PRECISION ADJUSTMENT
Integrated micro pitch and lateral shift adjustment to speed up image registration.

INTEGRATED CABLE MANAGEMENT
Aesthetic covers and internal cable management system conceal and protect cables for a clean finish.

VARIABLE EXTENSION OPTION
Projector mount slides along arm for infinite projector placement.

MULTIPLE INSTALLATION OPTIONS
Designed for mounting to concrete, block wall, wood or steel studs Includes mounting hardware.

WP21US EXTENDS UP TO 562 mm

Small economical dual or single stud short throw mount.
Includes Mini Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	44 mm	219 x 485 x 618 mm

WP22US EXTENDS UP TO 968 mm

Medium economical dual or single stud short throw mount.
Includes Mini Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	44 mm	219 x 485 x 1025 mm

WP23US EXTENDS UP TO 1375 mm

Large economical dual or single stud short throw mount.
Includes Mini Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	44 mm	219 x 485 x 1432 mm

APPLICATION SPECIFIC
WALL PROJECTOR MOUNTS

WMA1S WALL MOUNT ACCESSORY, SINGLE STUD

Heavy duty wall mount accessory for mounting projectors or flat panels in single stud or concrete applications

Weight Capacity	Extension	Dimensions (HxWxD)
Concrete/Wood 68 kg Steel Stud 22.7 kg	292 – 482 mm	361 x 185 x 292 mm

WMA2S WALL MOUNT ACCESSORY, DUAL STUD

A heavy-duty wall mount accessory for mounting projectors or flat panels in dual stud or concrete applications.

Weight Capacity	Extension	Dimensions (HxWxD)
Concrete/Wood 68 kg Steel Stud 34 kg	330 – 533 mm	292 x 470 x 330 mm

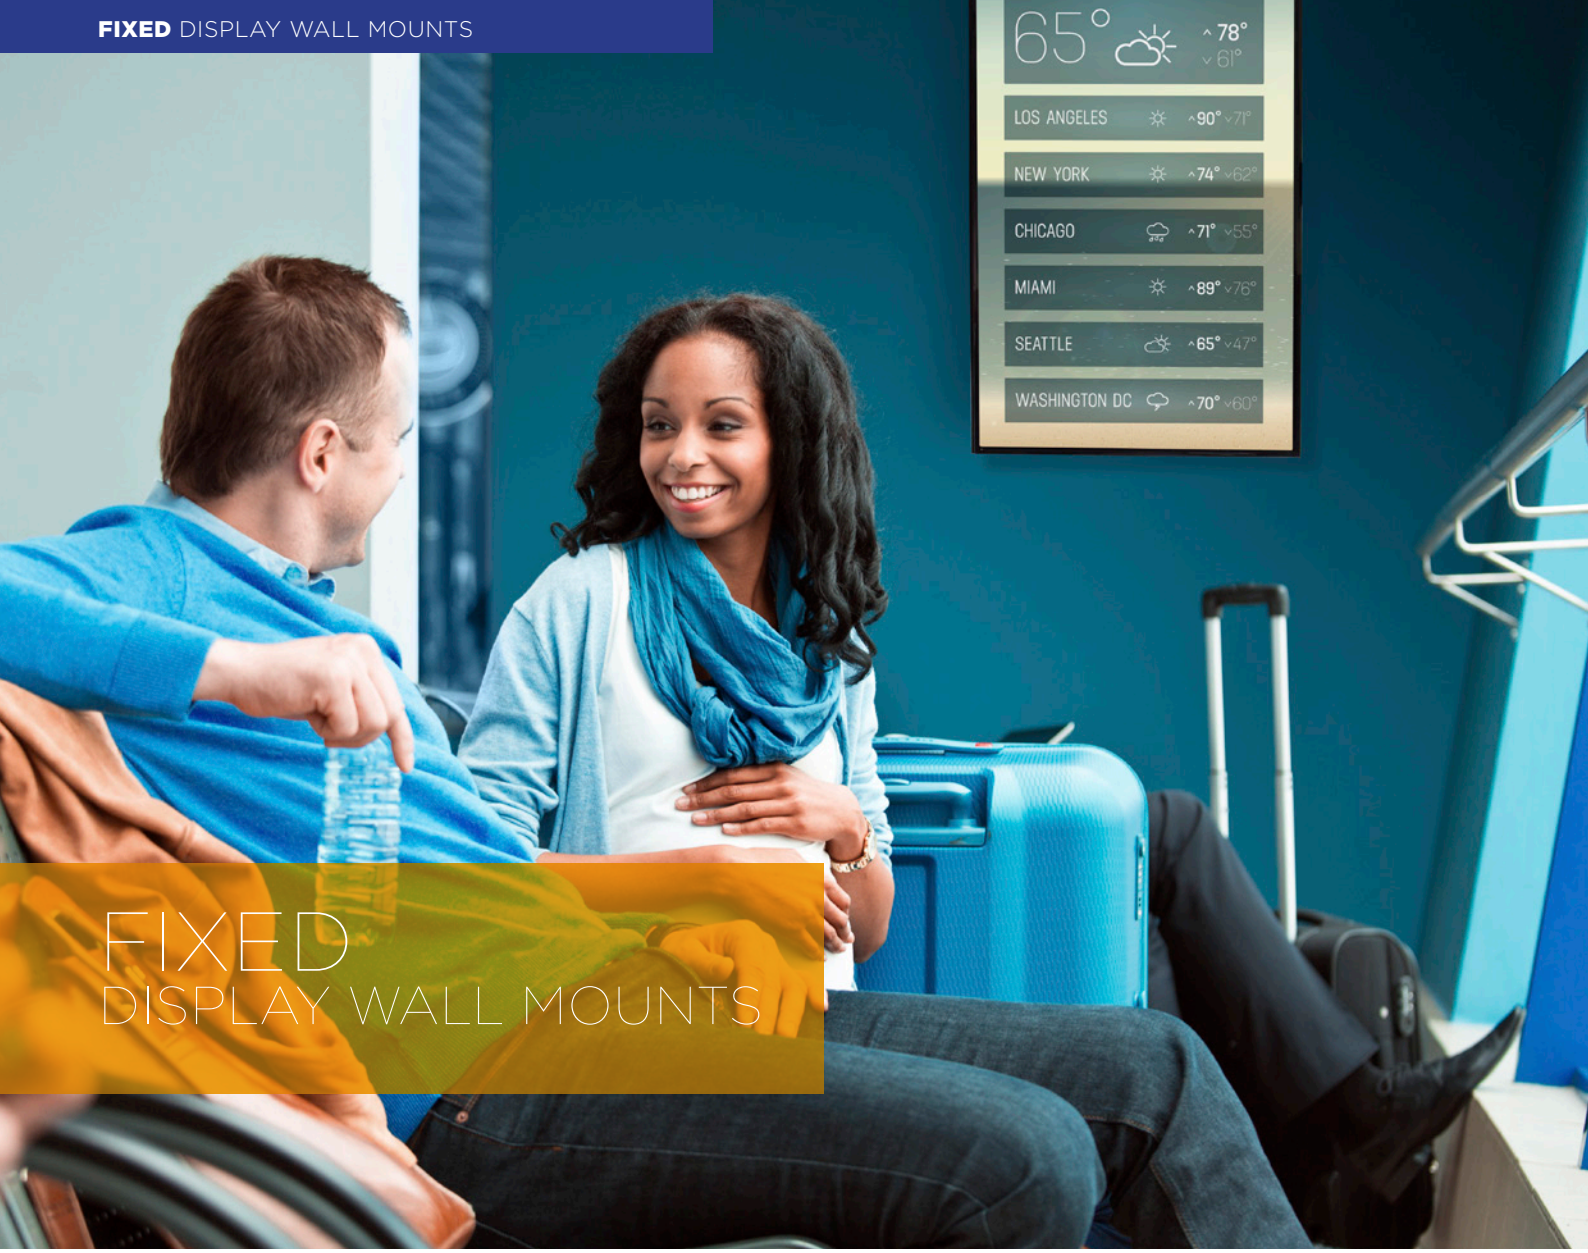

FIXED
DISPLAY WALL MOUNTS

FUSION™ FIXED MOUNT
FEATURES

CONTROLZONE™ LEVELING
Post-installation fine-tuning of height and leveling eliminates time needed for repositioning the mount and adjusts the entire configuration, not just the display.

CENTERLESS™ SHIFT
Generous post-installation lateral shift allows for perfect display positioning.

CLICKCONNECT™
Tool-less latching makes an audible click when a Fusion mount is safely engaged with the screen.

NEW ENHANCEMENTS
We kept all the features installers love while adding new benefits they asked for. Upgrades include:

- Super stability with set screws to keep the mount rigid
- Nesting spacers to achieve three different depths
- Faster installation with new teardrop design
- Quick-store cords
- Improved cable management with redesigned end caps

XSM1U 55 - 90" MICRO-ADJUST MOUNT

XL

For extra large displays with wide and/or tall mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust
113.4 kg	667 x 1086 x 57 mm	200 x 200 - 1086 x 600 mm	542 mm	25 mm

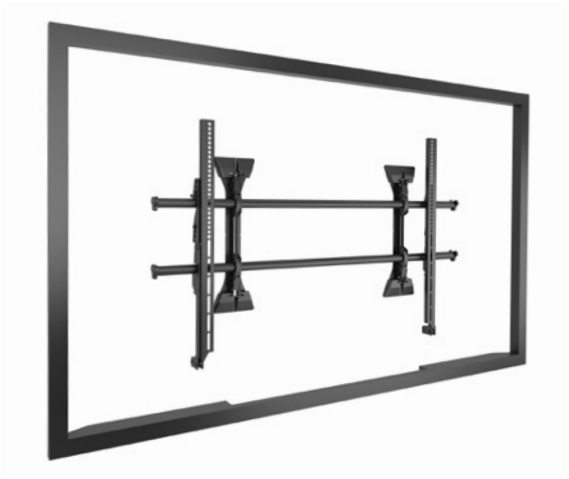

LSM1U 37 - 80" MICRO-ADJUST MOUNT

L

Our top performing fixed mount fits most displays on the market.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust
90.7 kg	464 x 883 x 51 mm	100 x 100 - 881 x 400 mm	441 mm	25 mm

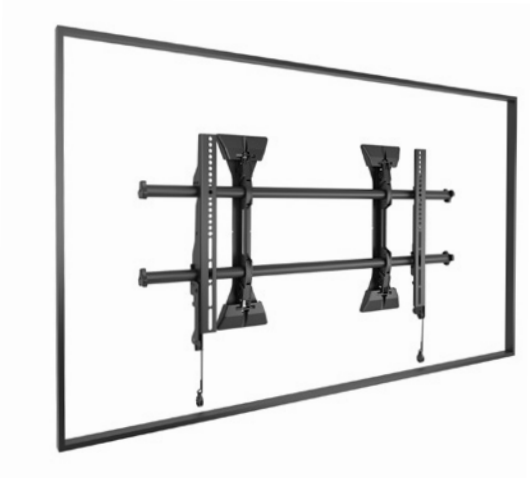

LSA1U 37 - 80" WALL MOUNT

L

This option without micro height adjustment is ideal for installs using Chief connector kits for multi-display installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust
90.7 kg	455 x 883 x 51 mm	100 x 100 - 876 x 400 mm	441 mm	N/A

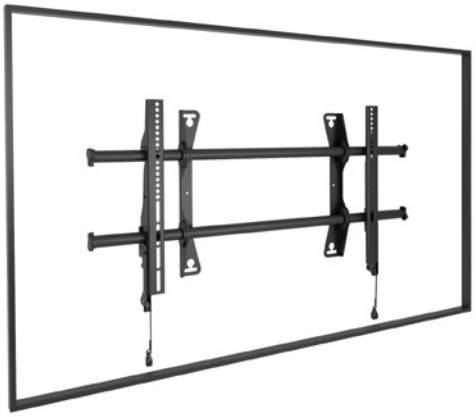

MSM1U 26 - 47" MICRO-ADJUST MOUNT

The smaller version of the LSM1U for shorter and/or narrower mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust
56.7 kg	464 x 654 x 51 mm	100x 100 - 653 x 400 mm	327 mm	25 mm

MSA1U 26 - 47" WALL MOUNT

This option without micro height adjustment is ideal for installs using Chief connector kits for multi-display installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust
56.7 kg	455 x 654 x 51 mm	100 x 100 - 647 x 400 mm	327 mm	N/A

VIEWSHARE VIDEO CONFERENCING KITS
FEATURES & SPECIFICATIONS

FLEXIBLE PLACEMENT
HD camera can be installed above, below or between displays.

EASY CONNECTIVITY
ViewShare is fast and easy to setup using familiar USB connectivity, simplifying adoption for end users.

PEER-TO-PEER SOFTWARE
ViewShare's components are Skype™ for Business Certified, and optimized for Lync™ and Skype.

THE RIGHT SIZED SOLUTION
ViewShare kits are available with and without a USB to CAT5 extender to suite a variety of room sizes. For huddle spaces and small conference rooms order the FCA800V, FCA810V or FCA820V. For larger conference rooms order the FCA800VE, FCA810VE or FCA820VE.

WHAT'S INCLUDED?
- Mount accessory with integrated HD camera (Logitech C930E)
- USB 2.0 type A cable (305 mm)
- Belkin® powered USB hub
- Jabra® 410MS USB speakerphone
- Black Box® USB to CAT5 extender with power supply (on E models only)

SYSTEM REQUIREMENTS
- Windows 7 or 8
- Mac OSX 10.7 or higher
- 2.4 GHz Dual Core processor or better
- 2 GB RAM or more
- USB 2.0 port (USB 3.0 ready)

BELKIN USB HUB

USB 2.0 CABLE

BLACK BOX USB TO CAT5 EXTENDER

JABRA USB SPEAKERPHONE

FCA800V/810V/820V	Compatibility
ViewShare Video Conference Kits without Extender	Fusion Series cart, stand and wall mounts

Model	Display Sizes	Camera Placement
FCA800V	Large	Above/Below
FCA810V	XL	Above/Below
FCA820V	Large & XL	Center

FCA800VE/810VE/820VE	Compatibility
ViewShare Video Conference Kits with Extender	Fusion Series cart, stand and wall mounts

Model	Display Sizes	Camera Placement
FCA800VE	Large	Above/Below
FCA810VE	XL	Above/Below
FCA820VE	Large & XL	Center

FUSION™ FIXED MOUNT
ACCESSORIES

FCA830/ FCA840	Compatibility
Center Channel Speaker Adapter	Fusion Fixed & Tilt Wall, Free-standing & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA830	52 - 80"	9.1 kg
FCA840	70 - 100"+	9.1 kg

FCA831/ FCA841	Compatibility
Center Channel Speaker Adapter	Fusion Fixed & Tilt Wall, Free-standing & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA831	42 - 70"	4.5 kg/side
FCA841	50 - 95"	4.5 kg/side

FCA112	Equipment Depth Range	Compatibility
Secure CPU/Media Player Adapter	0 - 41 mm	Large & Extra Large Fusion Wall Mounts

FCA113	Compatibility
Extension Accessory for Behind-Mount Storage Space	All Fusion Wall Mounts

FCK000/008/016	Compatibility
Connector Kits	Fusion Fixed & Tilt Wall Mounts

Model	Width
FCK000	Adds zero length to the poles
FCK008	203 mm
FCK016	406 mm

FCA800/ FCA801	Compatibility
Above/Below Shelf, Large* Displays	Fusion Fixed & Tilt Wall, Free-standing & Ceiling Mounts

Model	Size	Weight Capacity
FCA800	203 mm	9.1 kg
FCA801	355 mm	9.1 kg

**Typical screen size: 46-70".*

FCA810/ FCA811	Compatibility
Above/Below Shelf, XL* Displays	Fusion Fixed & Tilt Wall, Free-standing & Ceiling Mounts

Model	Size	Weight Capacity
FCA810	203 mm	9.1 kg
FCA811	355 mm	9.1 kg

** Typical screen size: 70-100".*

FCA820/ FCA821	Compatibility
Fusion Center Camera Shelf	Fusion Ceiling, Freestanding and Wall Mounts

Model	Size	Weight Capacity
FCA820	203 mm	9.1 kg
FCA821	355 mm	9.1 kg

FCA802/FCA812	Compatibility
Component Shelf, Large and XL Displays	Fusion Fixed & Tilt Wall, Free-standing & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA802	46 – 70"	9.1 kg
FCA812	70 – 100"	9.1 kg

FCA106	Compatibility
Side Cover Accessory	Fusion Fixed & Tilt Wall Mounts

THINSTALL™ FIXED MOUNT
FEATURES

ULTRA-LOW PROFILE
At less than the width of a penny, these mounts provide an ultra-thin profile to showcase any flat-screen display.

GLIDE LOCK™
Tool-less latching with a sliding flag for fast installation.

CABLE KICKSTAND
A kickstand makes cable access convenient while the open wall plate allows for easy electrical placement behind the display.

GLIDE LOCK™ LATCH

CABLE MANAGEMENT

LSTU 37 - 63" ULTRA-LOW PROFILE

Thinner than the diameter of a penny, this versatile mount is great for ultra-slim flat panels.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)
56.7 kg	628 x 907 x 10 mm	200 x 200 - 800 x 500 mm

MSTU 26 - 47" ULTRA-LOW PROFILE

Accommodates different mounting patterns than the LSTU and allows for landscape and portrait orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)
56.7 kg	530 x 706 x 10 mm	100 x 100 - 600 x 400 mm

OTHER FIXED WALL MOUNTS

PSMH OVER 60" HEAVY DUTY MOUNTS

XL

A heavy-duty series of mounts for extra large flat panels with custom solutions available.

Model	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)
PSMH2840	136.1 kg	635 x 924 x 74 mm	400 x 400 - 800 x 400 mm
PSMH2841	124.7 kg	533 x 495 x 32 mm	400 x 400 mm
PSMH2482	118.8 kg	896 x 1575 x 102 mm	Custom

Visit chiefmfg.com for additional PSMH model specifications.

FSRV 10 - 32" WALL MOUNT

S

A simple wall mount for small displays. The ultra low profile allows for portrait or landscape options with Q-Latch™ mounting system.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)
20.4 kg	178 x 152 x 19 mm	75 x 75 - 200 x 100 mm

PAC101 COMPONENT WALL SHELF

Provides a fast and simple wall installation for CPUs and other components.

Weight Capacity	Dimensions (HxWxD)	Color
9.1 kg	55 x 356 x 264 mm	S B

FIXED CPU MOUNT ACCESSORY

PAC103	Compatibility
Accessory Shelf Safety Strap	PAC101

TILT
DISPLAY WALL MOUNTS

FUSION™ TILT MOUNT
FEATURES

CONTROLZONE™ LEVELING
Post-installation fine-tuning of height and leveling eliminates time needed for repositioning the mount and adjusts the entire configuration, not just the display.

CENTERLESS™ SHIFT
Generous post-installation lateral shift allows for perfect display positioning.

CENTRIS™ LOW-PROFILE TILT
Uses the center of gravity to balance the screen while maintaining a low profile. The display stays in place until readjusted.

CLICKCONNECT™
Tool-less latching makes an audible click when a Fusion mount is safely engaged with the screen.

NEW ENHANCEMENTS
We kept all the features installers love while adding new benefits they asked for. Upgrades include:

- Super stability with set screws to keep the mount rigid
- Nesting spacers to achieve three different depths
- Faster installation with new teardrop design
- Quick-store cords
- Improved cable management with redesigned end caps

XTM1U 55 - 90" MICRO-ADJUST MOUNT

XL

Works best with extra large displays with wide and/or tall mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Tilt
113.4 kg	622 x 1086 x 64 mm	200 x 200 - 1250 x 660 mm	542 mm	25 mm	+5°, -12°

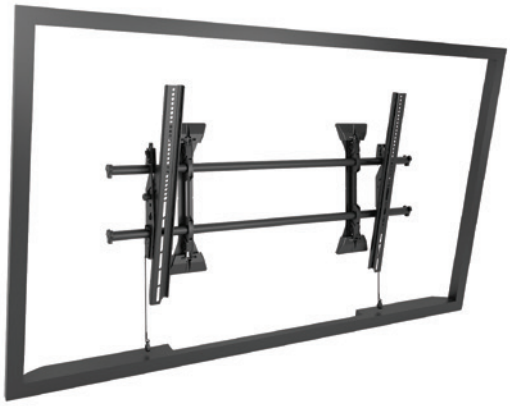

LTM1U 37 - 80" MICRO-ADJUST MOUNT

L

Our top performing tilt mount fits most displays on the market.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Tilt
90.7 kg	432 x 883 x 51 mm	100 x 100 - 895 x 505 mm	441 mm	25 mm	+2°, -12°

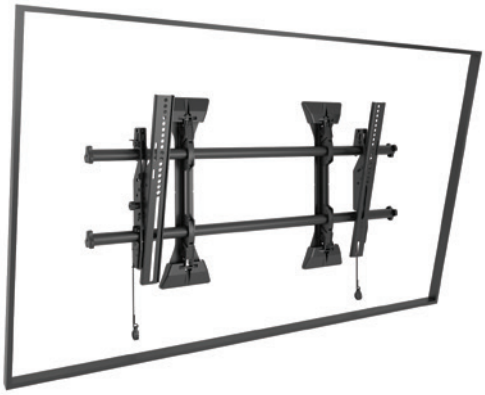

LTA1U 37 - 80" WALL MOUNT

L

This option without micro height adjustment is ideal for installs using Chief connector kits for multi-display installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Tilt
90.9 kg	419 x 883 x 50.8 mm	100 x 100 - 895 x 505 mm	441 mm	N/A	+2°, -12°

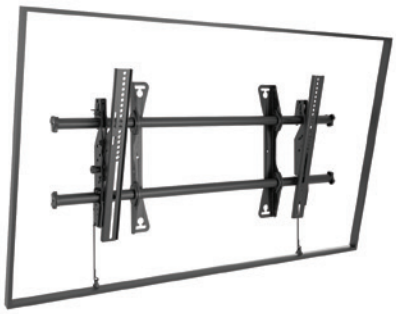

MTM1U 26 - 55" MICRO-ADJUST MOUNT

Simpler install with only two attach points.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Tilt
56.7 kg	432 x 654 x 51 mm	100 x 100 - 667 x 400 mm	327 mm	25 mm	+2°, -12°

MTMP1U 26 - 55" PORTRAIT/MICRO-ADJUST

The portrait version of the popular MTM1U.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Tilt
56.7 kg	622 x 530 x 81 mm	100 x 100 - 600 x 460 mm	265 mm	25 mm	+5°, -12°

MTA1U 26 - 55" WALL MOUNT

This option without micro height adjustment is ideal for installs using Chief connector kits for multi-display needs.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Tilt
56.7 kg	419 x 654 x 51 mm	100 x 100 - 673 x 400 mm	327 mm	N/A	+2°, -12°

VIEWSHARE VIDEO CONFERENCING KITS
FEATURES & SPECIFICATIONS

FLEXIBLE PLACEMENT
HD camera can be installed above, below or between displays.

EASY CONNECTIVITY
ViewShare is fast and easy to setup using familiar USB connectivity, simplifying adoption for end users.

PEER-TO-PEER SOFTWARE
ViewShare's components are Skype™ for Business Certified, and optimized for Lync™ and Skype.

THE RIGHT SIZED SOLUTION
ViewShare kits are available with and without a USB to CAT5 extender to suite a variety of room sizes. For huddle spaces and small conference rooms order the FCA800V, FCA810V or FCA820V. For larger conference rooms order the FCA800VE, FCA810VE or FCA820VE.

WHAT'S INCLUDED?
- Mount accessory with integrated HD camera (Logitech C930E)
- USB 2.0 type A cable (305 mm)
- Belkin® powered USB hub
- Jabra® 410MS USB speakerphone
- Black Box® USB to CAT5 extender with power supply (on E models only)

SYSTEM REQUIREMENTS
- Windows 7 or 8
- Mac OSX 10.7 or higher
- 2.4 GHz Dual Core processor or better
- 2 GB RAM or more
- USB 2.0 port (USB 3.0 ready)

BELKIN USB HUB

USB 2.0 CABLE

BLACK BOX USB TO CAT5 EXTENDER

JABRA USB SPEAKERPHONE

FCA800V/810V/820V	Compatibility
ViewShare Video Conference Kits without Extender	Fusion Series cart, stand and wall mounts

Model	Display Sizes	Camera Placement
FCA800V	Large	Above/Below
FCA810V	XL	Above/Below
FCA820V	Large & XL	Center

FCA800VE/810VE/820VE	Compatibility
ViewShare Video Conference Kits with Extender	Fusion Series cart, stand and wall mounts

Model	Display Sizes	Camera Placement
FCA800VE	Large	Above/Below
FCA810VE	XL	Above/Below
FCA820VE	Large & XL	Center

FUSION™ TILT MOUNT
ACCESSORIES

FCA830/ FCA840	Compatibility
Center Channel Speaker Adapter	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA830	52 - 80"	9.1 kg
FCA840	70 - 100"+	9.1 kg

FCA831/ FCA841	Compatibility
Center Channel Speaker Adapter	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA831	42 - 70"	4.5 kg/side
FCA841	50 - 95"	4.5 kg/side

FCA112	Equipment Depth Range	Compatibility
Secure CPU/Media Player Adapter	0 - 41 mm	Large & Extra Large Fusion Wall Mounts

FCA113	Compatibility
Extension Accessory for Behind-Mount Storage Space	All Fusion Wall Mounts

FCK000/008/016	Compatibility
Connector Kits	Fusion Fixed & Tilt Wall Mounts

Model	Width
FCK000	Adds zero length to the poles
FCK008	203 mm
FCK016	406 mm

FCA800/ FCA801	Compatibility
Above/Below Shelf, Large* Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Size	Weight Capacity
FCA800	203 mm	9.1 kg
FCA801	355 mm	9.1 kg

**Typical screen size: 46-70".*

FCA810/ FCA811	Compatibility
Above/Below Shelf, XL* Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Size	Weight Capacity
FCA810	203 mm	9.1 kg
FCA811	355 mm	9.1 kg

** Typical screen size: 70-100".*

FCA820/ FCA821	Compatibility
Fusion Center Camera Shelf	Fusion Ceiling, Freestanding and Wall Mounts

Model	Size	Weight Capacity
FCA820	203 mm	9.1 kg
FCA821	355 mm	9.1 kg

FCA802/FCA812	Compatibility
Component Shelf, Large Displays	Fusion Fixed & Tilt Wall, Free-standing & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA802	46 - 70"	9.1 kg
FCA812	70 - 100"	9.1 kg

FCA106	Compatibility
Side Cover Accessory	Fusion Fixed & Tilt Wall Mounts

THINSTALL™ TILT MOUNT
FEATURES

ULTRA-LOW PROFILE
At less than the width of a penny, these mounts provide an ultra-thin profile to showcase any flat-screen display.

GLIDE LOCK
Tool-less latching with a sliding flag for fast installation.

CENTRIS LOW-PROFILE TILT
Uses the center of gravity to balance the screen while maintaining a low profile. The display stays set in place until readjusted.

CABLE KICKSTAND
A kickstand makes cable access hands-free while the open wall plate allows for easy electrical placement behind the display.

GLIDE LOCK™ LATCH

CABLE MANAGEMENT

LTTU 37 - 80" ULTRA-LOW PROFILE

L

At 19 mm thick, this mount combines an ultra-thin profile with the functionality of 12 degrees of tilt.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Screen Thickness	Tilt
45.4 kg	548 x 907 x 19 mm	200 x 200 - 800 x 500 mm	51 mm	-12°

MTTU 26 - 55" ULTRA-LOW PROFILE

M

Like the LTTU but it allows for different mounting patterns and both landscape and portrait screen orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Screen Thickness	Tilt
45.4 kg	448 x 706 x 19 mm	100 x 100 - 600 x 400 mm	51 mm	-12°

OTHER TILT WALL MOUNTS

MWCU 26 - 55" MOUNT WITH CPU STORAGE

M

Provides an all-in-one tilt wall mount solution for both a medium-sized flat panel display and CPU or receiver.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Equip Size (HxWxD)	Tilt
45.4 kg	303 x 487 x 114 mm	100 x 100 - 709 x 431 mm	356 x 478 x 97 mm	-15°

FTRV 10 - 32" WALL MOUNT

S

A small option for flat panel displays or monitors that allows for portrait or landscape options with Q-Latch™ mounting system.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt
20.4 kg	142 x 141 x 46 mm	75 x 75 - 200 x 100 mm	+5°, -15°

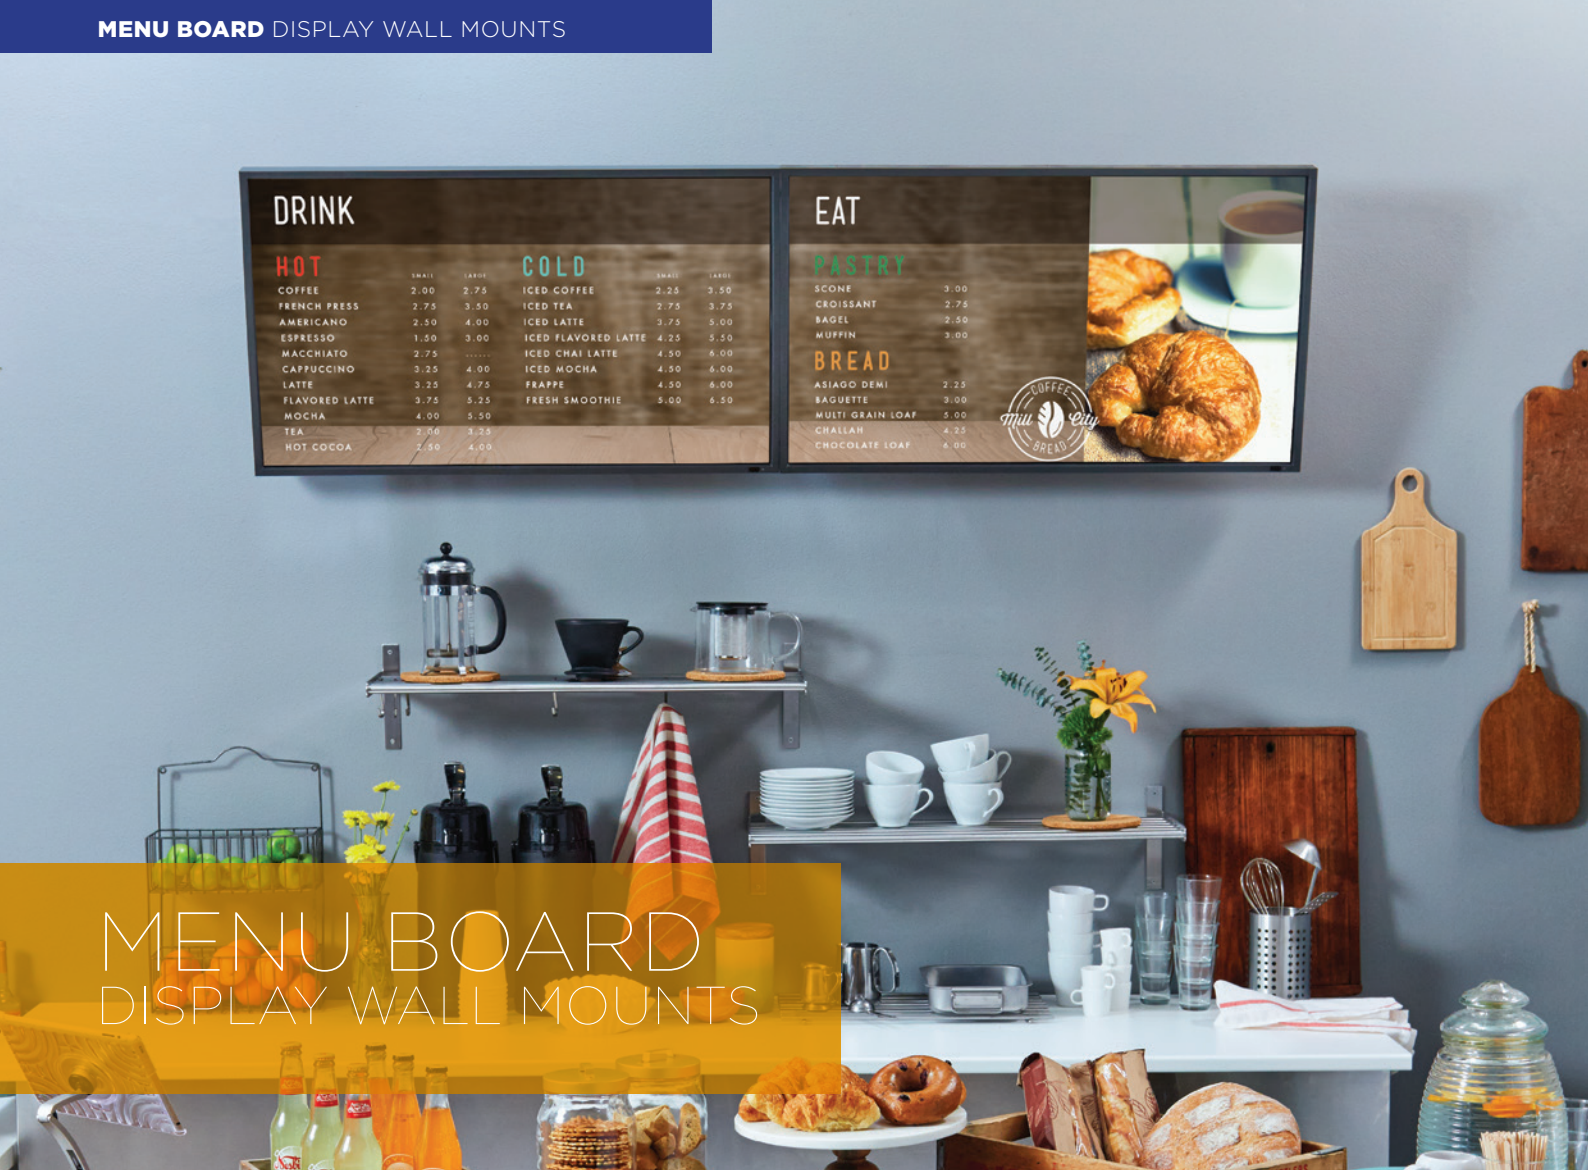

MENU BOARD
DISPLAY WALL MOUNTS

FUSION™ MENU BOARD MOUNT
FEATURES

CONTROLZONE LEVELING
Post-installation fine-tuning of height and leveling up to ±25 mm — 4x1 and 5x1 configurations include a floating center wall bracket.

LATERAL SHIFT
Wall brackets can be shifted around outlets and keep displays centered regardless of stud positioning.

INDEPENDENT DEPTH ADJUST
Independent depth adjust of 25 mm, from 147-173 mm, accommodates media players and cabling behind the displays and compensates for uneven walls.

CENTRIS TILT
Uses the center of gravity to balance the screen with a tilt range from 0-20 degrees and locking points at 0, 10 and 20 degrees.

60" OPTION
ADD EXTENSION
FCAX accessories increase rail length for larger displays, up to 60".

LWM5X1U LANDSCAPE MENU BOARD

The largest of our wall-mounted menu boards, this configuration is five screens across with a floating third wall bracket. Fits 40 – 55" displays.



Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt
56.7 kg	43 x 490 x 15 cm	any width x 100-400 mm	147-173 mm	20˚

LWM4X1U LANDSCAPE MENU BOARD

A classic four-screen configuration with a floating third wall bracket. Fits 40 – 55" displays.

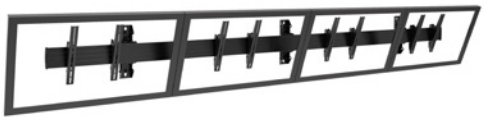

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt
56.7 kg	43 x 399 x 15 cm	any width x 100-400 mm	147-173 mm	20˚

LWM3X1U LANDSCAPE MENU BOARD

This standard 3-screen configuration securely supports displays with just two mounting brackets. Fits 40 – 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt
56.7 kg	43 x 276 x 15 cm	any width x 100-400 mm	147-173 mm	20˚

LWM3X1UP PORTRAIT MENU BOARD

60" OPTION

The portrait version of the LWM3x1U. Fits 40 – 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt
56.7 kg	43 x 175 x 15 cm	any width x 100-400 mm	147-173 mm	20˚

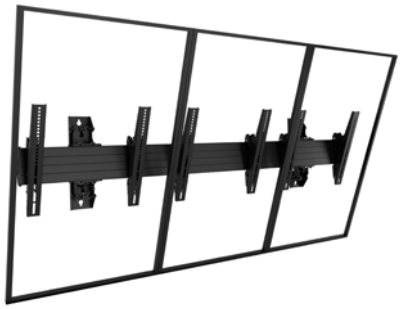

LWM2X1U LANDSCAPE MENU BOARD

60" OPTION

A smaller two-screen configuration for tighter spaces.

Fits 40 – 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt
56.7 kg	43 x 183 x 15 cm	any width x 100-400 mm	147-173 mm	20˚

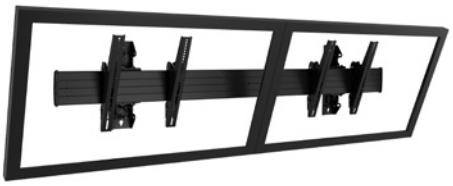

LWM2X1UP PORTRAIT MENU BOARD

60" OPTION

The portrait version of the LWM2x1U. Fits 40 – 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt
56.7 kg	43 x 119 x 15 cm	any width x 100-400 mm	147-173 mm	20˚



FUSION™ MENU BOARD DISPLAY WALL MOUNT
ACCESSORIES

FCAX08/14/20	Compatibility
Video Wall Extension Brackets	Fusion Video Wall & Menu Board Ceiling and Wall Mounts

Model	Length
FCAX08	203 mm
FCAX14	356 mm
FCAX20	508 mm

VIDEO WALL
DISPLAY WALL MOUNTS

CONNEXSYS™ VIDEO WALL SYSTEM
FEATURES

SPEED LEVELING
Mount multiple units to a single strut channel for quick row leveling and centerless lateral shift.

POWERZONE™ ADJUSTMENTS
Six points of tool-free adjustment: height, depth, lateral and tilt are all found in one easy-to-access location. Rigid frame keeps displays where you set them even after extending for service.

RAPIDDRAW™ DISPLAY RELEASE
Cord release system gently and remotely pops any screen out 349 mm from the wall for easy access and service while minimizing aggressive screen pushes. Get an additional 20 degrees of bottom pull-out with an integrated kickstand. Cords can be set to release from any 90 degree angle.

GENEROUS DEPTH ADJUSTMENT
Mount depth from wall can be set between 102 and 186 mm for perfect alignment, accommodating for recess applications and wall imperfections.

LVS1U 42 - 80" LANDSCAPE SYSTEM WITH RAILS

This universal pop-out mount is ideal for large-scale, seamless video walls and recessed applications. Ships with rails for each mount.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust
68 kg	554 x 903 x 102 mm	200 x 100 - 700 x 400 mm*	+4° / -2.5°	± 25 mm	85 mm

** Add FHB5050 interface adapter for compatibility with 800 x 400 mm mounting patterns.*

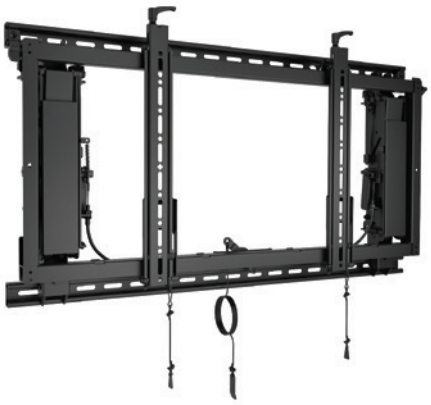

LVS1UP 40 - 80" PORTRAIT SYSTEM WITH RAILS

The portrait version of the LVS1U that ships with rails for each mount.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust
68 kg	826 x 496 x 104 mm	200 x 100 - 800 x 400 mm	+4° / -2.5°	± 25 mm	85 mm

LVSXU 42 - 80" LANDSCAPE SYSTEM WITHOUT RAILS

Nearly identical to the LVS1U but ships without rails so installers can source strut locally to hang multiple mounts to one rail and reduce installation time.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust
68 kg	554 x 903 x 102 mm	200 x 100 - 700 x 400 mm*	+4° / -2.5°	± 25 mm	85 mm

** Add FHB5050 interface adapter for compatibility with 800 x 400 mm mounting patterns.*

LVSXUP 40 - 80" PORTRAIT SYSTEM WITHOUT RAILS



The portrait version of the LVSXU that also ships without rails.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust
68 kg	826 x 496 x 104 mm	200 x 100 - 800 x 400 mm	+4° / -2.5°	± 25 mm	85 mm

CONNEXSYS VIDEO WALL SYSTEM
ACCESSORIES

FHB5050	Dimensions*	Compatibility
800 x 400 mm Interface Adapter	432 x 120 x 16 mm	LVS1U, LVSXU

**Dimensions given are for one side of the two-piece FHB5050 bracket.*

CSA100	Dimensions	Compatibility
Device Holder	250 x 202 x 38 mm	All ConnexSys Mounts

CSACLIPS	Dimensions	Compatibility
Cable Quick Ties (Qty 100)	35 x 19 x 23 mm	All ConnexSys Mounts

FUSION™ PULL-OUT
FEATURES

CONTROLZONE™

CENTERLESS™ SHIFT

PULL-OUT EXTENSION
Mounts extend 178 mm for easy cable access and servicing in hard-to-reach installations.

CONTROLZONE LEVELING
Post-installation fine-tuning of height and leveling ensures screen will be perfectly aligned.

CENTERLESS SHIFT
Generous post-installation lateral shift allows screen to slide apart or together for easy maintenance and perfect alignment.

CLICKCONNECT™
Tool-less latching makes an audible click when a Fusion mount is safely engaged with the screen.

LSMVU 37 - 63" PULL-OUT WALL MOUNT

Chief's most popular, micro-adjustable pull-out mount fits most displays to create seamless video walls up to 2x2.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Extension	Plumb Adjustment
68 kg	533 x 879 x 94 mm	200 x 200 - 760 x 505 mm	445 mm	272 mm	2.5°

LSMVPU PORTRAIT PULL-OUT WALL MOUNT

The portrait version of the popular LSMVU for 37-63" displays can be used to create video walls up to 2x2.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Extension	Plumb Adjustment
68 kg	826 x 523 x 94 mm	200 x 200 - 800 x 400 mm	102 mm	272 mm	2.5°

MSMVU 26 - 47" PULL-OUT WALL MOUNT

The smaller version of the LSMVU for shorter and/or narrower mounting patterns can be used to create video walls up to 2x2.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Extension	Plumb Adjustment
56.7 kg	419 x 648 x 94 mm	100 x 100 - 540 x 400 mm	368 mm	272 mm	2.5°

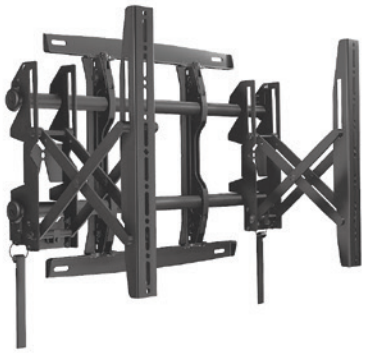

MSMVPU PORTRAIT PULL-OUT WALL MOUNT

The portrait version of the popular MSMVU for 26 - 47" displays can be used to create video walls up to 2x2.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Extension	Plumb Adjustment
56.7 kg	620 x 523 x 94 mm	100 x 100 - 600 x 400 mm	254 mm	272 mm	2.5°

FUSION™ PULL-OUT MOUNT
ACCESSORIES

FCA112	Equipment Depth Range	Compatibility
Secure CPU/Media Player Adapter	0 - 41 mm	Large & Extra Large Fusion Wall Mounts

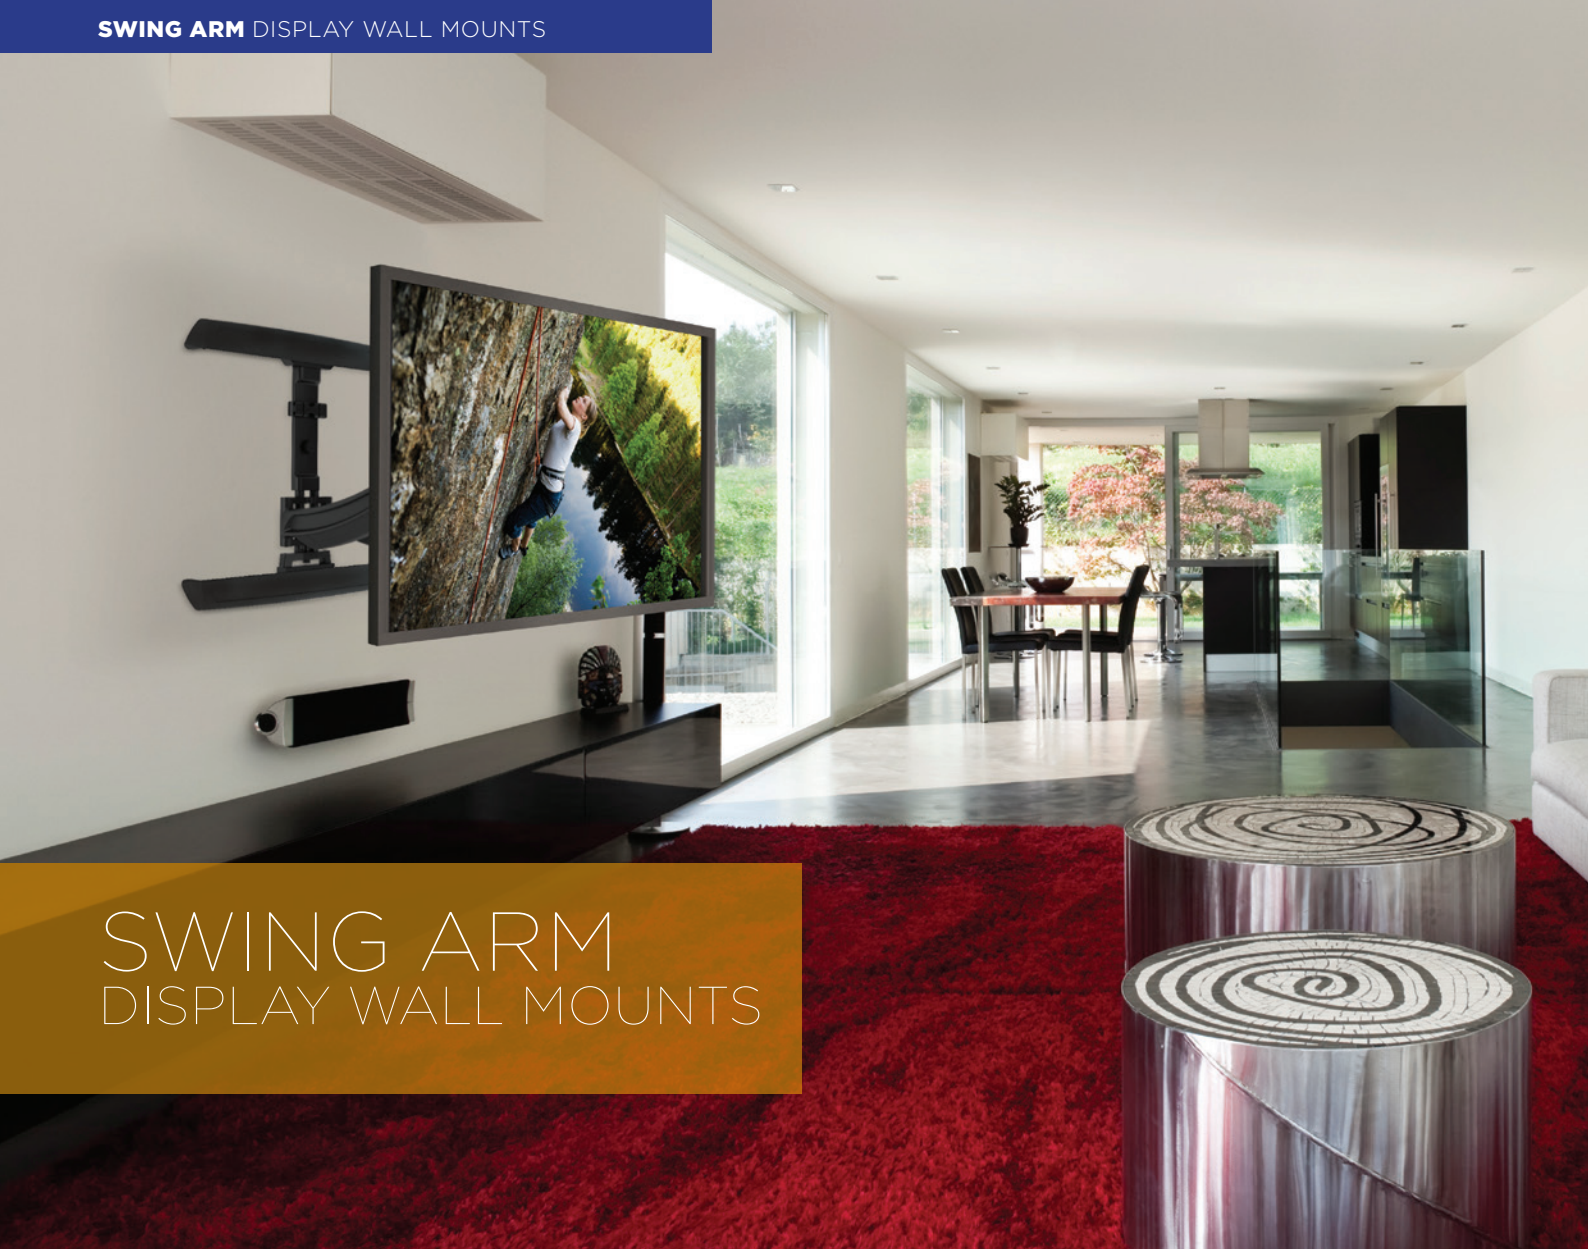

SWING ARM
DISPLAY WALL MOUNTS

THINSTALL™ SWING ARM
FEATURES

ULTRA-LOW PROFILE
These sleek designs retract down to 38 to 46 mm to provide an ultra-thin profile to showcase any flat-screen display.

CENTERLESS™ SHIFT
Generous post-installation lateral shift up to 406 mm allows for perfect display positioning.

CABLE MANAGEMENT
Enclosed, tool-less cable covers and a wide open wall plate make it easy to route power and signal cables.

CENTRIS™ FINGERTIP TILT
Uses the center of gravity to balance the screen for up to 15 degrees of easy tilt capability.

HEIGHT ADJUST
Adjust the height of the entire configuration post installation up to 25 mm.

TS525TU 37 - 58" EXTENDS 635 mm

This feature-rich swing arm fits most screens and has a large array of supporting accessories.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
56.7 kg	527 x 749 x 38 mm	100 x 100 - 800 x 400 mm	635 mm	406 mm	-15°	25 mm

TS325TU 26 - 52" EXTENDS 635 mm

Very similar to the TS525TU but with shorter wall plate and modified interface making it better suited for lighter displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
34 kg	439 x 749 x 46 mm	100 x 100 - 600 x 400 mm	635 mm	406 mm	-15°	25 mm

TS318TU 26 - 52" EXTENDS 457 mm

This mount has the same features as the TS325TU with 457 mm extension.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
34 kg	439 x 574 x 46 mm	100 x 100 - 600 x 400 mm	457 mm	406 mm	-15°	25 mm

TS318SU 26 - 52" EXTENDS 457 mm

This single stud version of the TS318 dual arm swing arm mount works well when lateral shift is not a necessity.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
34 kg	343 x 574 x 46 mm	100 x 100 - 600 x 400 mm	457 mm	N/A	-15°	25 mm

TS218SU 26 - 47" EXTENDS 457 mm

This single stud swing arm works well in corners and with most medium flat panels. It also accommodates portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
34 kg	356 x 330 x 38 mm	100 x 100 - 400 x 400 mm	457 mm	N/A	-12°	25 mm

TS118SU 10 - 32" EXTENDS 457 mm

Fits smaller patterns and screens than the TS218SU.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
15.9 kg	294 x 330 x 38 mm	75 x 75 - 200 x 200 mm	457 mm	N/A	-12°	N/A

TS110SU 10 - 32" EXTENDS 250 mm

This basic swing arm wall mount provides single arm extension and swivel for smaller displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
15.9 kg	239 x 356 x 38 mm	75 x 75 - 200 x 200 mm	250 mm	N/A	-12°	N/A

THINSTALL™ SWING ARM
ACCESSORIES

TA100	Dimensions (WxD)	Weight Capacity	Compatibility
Component Shelf	457 x 305 mm	4.5 kg	TS525TU, TS325TU, TS318TU, TS318SU

TA200/250	Compatibility
Video Conference Camera Shelves - Above	TS525TU, TS325TU, TS318TU, TS318SU

Model	Dimensions (WxD)	Weight Capacity
TA200	203 x 184 mm	4.5 kg
TA250	305 x 184 mm	4.5 kg

TA300	Weight Capacity	Compatibility
Left/Right Speaker Adapter	4.5 kg	TS525TU, TS325TU, TS318TU, TS318SU

TA350	Weight Capacity	Compatibility
Center Channel Speaker Adapter	4.5 kg	TS525TU, TS325TU, TS318TU, TS318SU

TA410	Compatibility
Portrait Adapter	TS525TU, TS325TU, TS318TU, TS318SU

PAC525	Dimensions (HxWxD)	Compatibility
Small Multi-Depth Wall Box	229 x 362 x 99 mm	All Chief Wall Mounts

Model	Includes Flange
PAC525	No
PAC525FW	Yes

PAC526	Dimensions (HxWxD)	Compatibility
Large Multi-Depth Wall Box	362 x 362 x 99 mm	All Chief Wall Mounts

Model	Includes Flange
PAC526	No
PAC526FW	Yes

PACUNV1	Dimensions (HxWxD)	Weight Capacity	Compatibility
Component Adapter Bracket	146 x 174 x 38 mm	4.5 kg	PAC525 & PAC526 In-wall Boxes

OTHER SWING ARM MOUNTS

PDRUB 42 - 80" EXTENDS UP TO 940 mm

The heavy-duty swing arm option works for displays up to 90.7 kg and extends up to 940 mm. Supports both portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Color
90.7 kg	56 x 100.3 x 8.6 cm	200 x 200 - 862 x 517 mm	940 mm	229 mm	+5°, -16°	B

PNRUB 42 - 80" EXTENDS UP TO 635 mm

The smaller version of the PDR extends to 635 mm. Supports both portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Color
90.7 kg	538 x 687 x 84 mm	200 x 200 - 862 x 517 mm	635 mm	229 mm	+5°, -17°	B

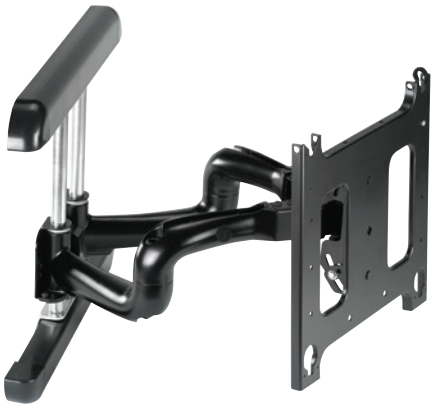

OTHER SWING ARM MOUNT ACCESSORY

PAC715/PAC716	Compatibility
Video Conference Camera Shelves - Above or Below	PDR, PNR & Other Q-Latch Mounts

Model	Dimensions (WxD)	Weight Capacity
PAC715	229 x 223 mm	4.5 kg
PAC716	356 x 201 mm	4.5 kg

PACCS1	Compatibility
Large Accessory Shelf	PDR, PNR & Other Q-Latch Mounts



PAC400	Compatibility
P-Series Rotation Adapter	PDR, PNR & Other Q-Latch Mounts

CEILING
DISPLAY MOUNTS

FUSION™ VIDEO WALL
FEATURES

CONTROLZONE™ LEVELING
Allows for 51 mm of height adjustment at each mounting box plus 25 mm increments along each column.

INDEPENDENT ADJUSTMENT
Separate knobs for micro-height and plumb adjustment help to easily align displays without tools.

INDEPENDENT ADJUSTMENT

INFINITE SCREEN POSITIONING

INFINITE SCREEN POSITIONING
Infinite vertical and lateral shift adjustments allow for tight display rows and columns.

CABLE MANAGEMENT
FCACLIPS can be added at any point along the crossbars to create anchor points for easy cable management.

60" OPTION

ADD EXTENSION
FCAX accessories increase rail length for larger displays, up to 152 cm.

LCM3X3U LANDSCAPE VIDEO WALL

60" OPTION

The landscape 3 wide x 3 tall configuration can be combined with other ceiling mounts to create longer walls. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Manual Height Adjust	Micro Height Adjust
38.5 kg	1996 x 2763 x 368 mm	Any width x 100 - 400 mm	25 mm	51 mm

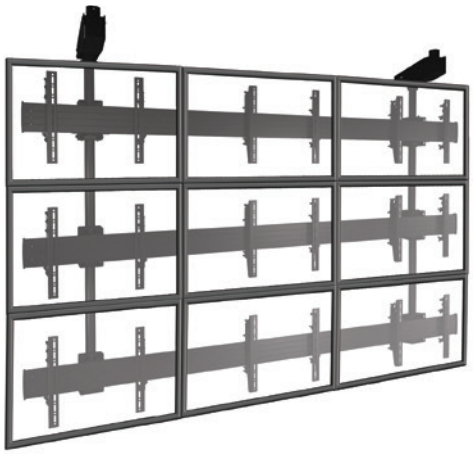

LCM3X2U LANDSCAPE VIDEO WALL

60" OPTION

Create video walls in landscape orientation 3 wide x 2 tall. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Manual Height Adjust	Micro Height Adjust
56.7 kg	1389 x 2766 x 368 mm	Any width x 100 - 400 mm	25 mm	51 mm

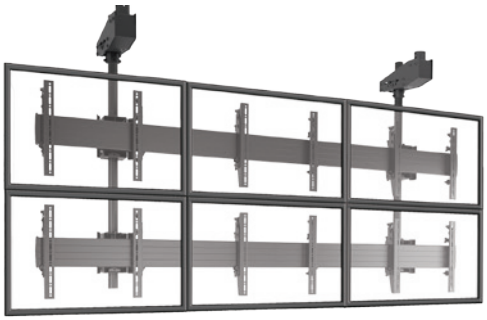

LCM3X2UP PORTRAIT VIDEO WALL

60" OPTION

A portrait version to mount video walls 3 wide x 2 tall. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Manual Height Adjust	Micro Height Adjust
56.7 kg	1996 x 1748 x 368 mm	100 - 800 mm x Any Height	25 mm	51 mm

LCM2X2U LANDSCAPE VIDEO WALL

The versatile and popular landscape 2 wide x 2 tall configuration fits well in most digital signage applications. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Manual Height Adjust	Micro Height Adjust
56.7 kg	1389 x 1851 x 368 mm	Any width x 100 - 400 mm	25 mm	51 mm

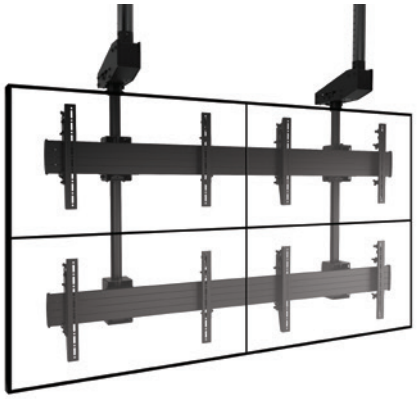

LCM2X2UP PORTRAIT VIDEO WALL

A portrait version to mount video walls 2 wide x 2 tall. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Manual Height Adjust	Micro Height Adjust
56.7 kg	1996 x 1189 x 368 mm	100 - 800 mm x Any Height	25 mm	51 mm

FUSION™ MENU BOARD
FEATURES

CONTROLZONE LEVELING

CENTRIS TILT TECHNOLOGY

CONTROLZONE™ LEVELING
Allows for 51 mm of height adjustment at each mounting box.

CENTRIS™ TILT TECHNOLOGY
Screens stay where you place them for effortless multi-screen alignment.

TOOL-FREE SCREEN ENGAGEMENT
Easily place screens and add optional padlock security.

LATERAL SHIFT
Post-installation lateral shift allows screens to slide apart or together for easy maintenance and perfect alignment.

60" OPTION
ADD EXTENSION
FCAX accessories increase rail length for larger displays, up to 152 cm.

LCM3X1U LANDSCAPE MENU BOARD

L 60" OPTION

This classic menu board configuration is three screens across. Create longer menu boards by combining mounts. Fits 40 - 55" displays.

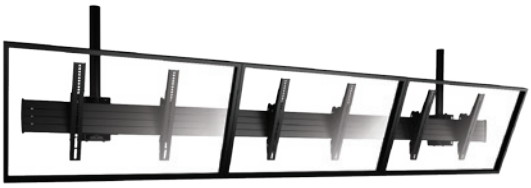

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
56.7 kg	425 x 2766 x 201 mm	Any width x 100 - 400 mm	51 mm	+5°, -20°

LCM3X1UP PORTRAIT MENU BOARD

L 60" OPTION

The portraitof the LCM3X1U. Fits 40 - 55" displays.

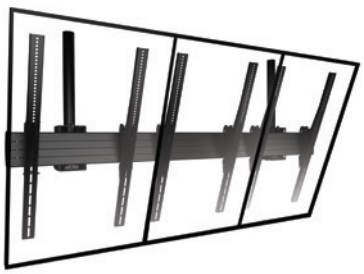

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
56.7 kg	826 x 1750 x 201 mm	100 - 800 mm x Any Height	51 mm	+5°, -20°

LCB3X1U BACK-TO-BACK LANDSCAPE

Mount three screens back-to-back in landscape orientation for six total screens. Fits 40 - 55″ displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
56.7 kg	425 x 2763 x 292 mm	Any width x 100 - 400 mm	51 mm	+5°, -20°

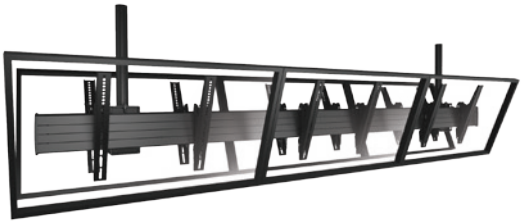

LCB3X1UP BACK-TO-BACK PORTRAIT

The portrait version of the LCB3X1U. Fits 40 - 55″ displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
56.7 kg	826 x 1748 x 292 mm	100 - 800 mm x Any Height	51 mm	+5°, -20°

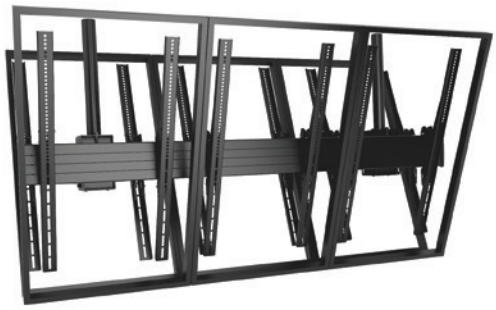

LCM2X1U LANDSCAPE MENU BOARD

This classic menu board configuration is two screens across. Create longer menu boards by combining mounts. Fits 40 - 55″ displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
56.7 kg	427 x 1851 x 201 mm	Any width x 100 - 400 mm	N/A	+5°, -20°

LCM2X1UP PORTRAIT MENU BOARD

The portrait version of the LCM2X1U. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
56.7 kg	826 x 1190 x 201 mm	100 - 800 mm x Any Height	N/A	+5°, -20°

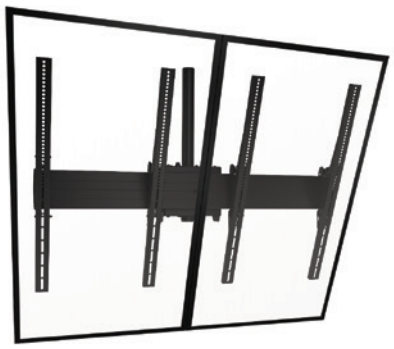

LCB2X1U BACK-TO-BACK LANDSCAPE

Mount two screens back-to-back in landscape orientation for four total screens. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
45.4 kg	425 x 1851 x 296 mm	Any width x 100 - 400 mm	N/A	+5°, -20°

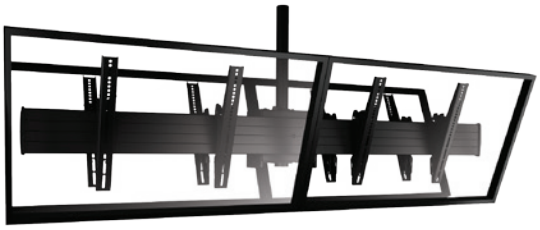

LCB2X1UP BACK-TO-BACK PORTRAIT

The portrait version of the LCB2X1U. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
45.4 kg	826 x 1190 x 296 mm	100 - 800 mm x Any Height	N/A	+5°, -20°

FUSION™ CEILING MOUNTS
FEATURES

CENTRIS™ TILT TECHNOLOGY
Provides a continuous range of fingertip tilt from +5 to -20 degrees with four set locking points at 0, 5, 10 and 15 degrees to eliminate guess work when adjusting multiple screens.

ON/OFF COLUMN CONNECTION
Simple connection for ease of installation and service, particularly when installing in tight corners or near walls.

TOOL-FREE SCREEN ENGAGEMENT
Easily place screens and add optional padlock security.

FLEXIBILITY
Mount swivels to any preferred viewing angle before locking down with set screws.

XCM7000 60 - 98" HEAVY-DUTY MOUNT

XL

Dual pole drop provides needed support for single extra large and deep flat panel displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)*	Tilt	Roll Adjust
136 kg	425 x 884 x 203 mm	800 x 400 mm	+7.5° / -20°	2" total height adjust at each head assembly

**Interface adapters for larger mounting hole patterns are available, please contact your customer service team for the correct part codes and to verify compatibility.*

XCB7000 60 - 90" BACK-TO-BACK HEAVY-DUTY MOUNT

XL

Dual pole drop provides needed support for back-to-back configurations of extra large and deep flat panel displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)*	Tilt	Roll Adjust
136 kg	425 x 884 x 300 mm	800 x 400 mm	+7.5° / -20°	2" total height adjust at each head assembly

**Interface adapters for larger mounting hole patterns are available, please contact your customer service team for the correct part codes and to verify compatibility.*

XCM1U 60 - 90” LANDSCAPE CEILING MOUNT

XL

For heavier displays with wider mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)*	Tilt	Roll Adjust
113.4 kg	425 x 884 x 201 mm	200 x 100 - 800 x 400 mm	+5°, -20°	±3°

**Interface adapters for larger mounting hole patterns are available, please contact your customer service team for the correct part codes and to verify compatibility.*

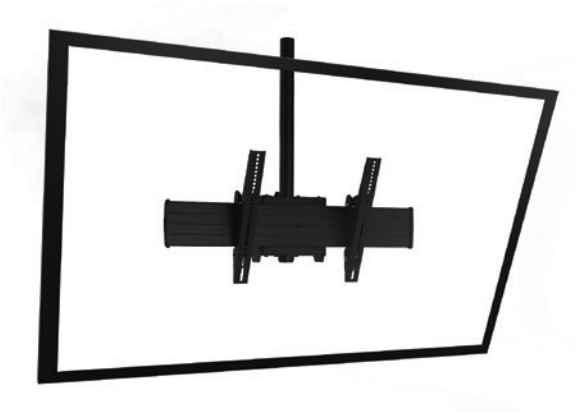

XCB1U 60 - 90” BACK-TO-BACK LANDSCAPE MOUNT

XL

Back-to-back version of the XCM1U to mount two displays with wider mounting patterns.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)*	Tilt	Roll Adjust
90.7 kg	425 x 884 x 296 mm	200 x 100 - 800 x 400 mm	+5°, -20° for screens up to 38.8" tall	±3°

**Interface adapters for larger mounting hole patterns are available, please contact your customer service team for the correct part codes and to verify compatibility.*

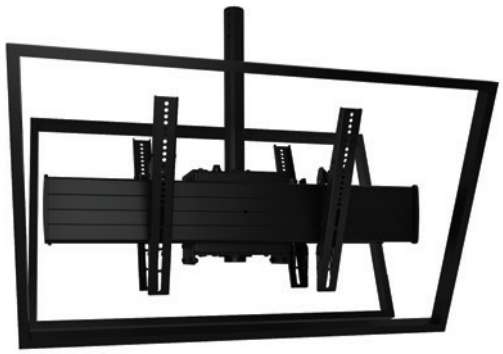

LCM1U LANDSCAPE CEILING MOUNT

L

Our most popular, feature-packed and versatile single ceiling mount fits most 32 - 60" displays. Add another for stacked configurations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	420 x 681 x 162 mm	200 x 100 - 616 x 400 mm	+5°, -20°	±3°	B

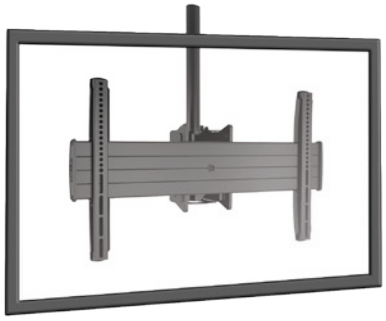

LCM1UP PORTRAIT CEILING MOUNT

The portrait version of the LCM1U. Fits 32 - 60" displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	826 x 529 x 162 mm	200 x 100 - 460 x 800 mm	+5°, -20°	±3°	S B

LCB1U BACK-TO-BACK LANDSCAPE MOUNT

The back-to-back version of the LCM1U for two total screens in a landscape configuration. Fits 32 - 60" displays.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	420 x 681 x 259 mm	200 x 100 - 616 x 400 mm	+5°, -20°	±3°	B

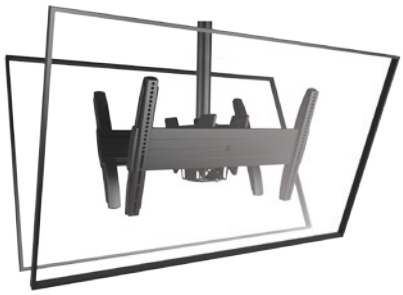

LCB1UP BACK-TO-BACK PORTRAIT MOUNT

The portrait version of the LCB1U. Fits 32 - 60" displays.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	826 x 529 x 259 mm	200 x 100 - 460 x 800 mm	+5°, -20°	±3°	B

LCM1X2U 32 - 60" STACKED LANDSCAPE

This solution includes two LCM1U mounts and a 121.9 cm perforated CPA column for stacking two screens on the same column.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	420 x 681 x 162 mm	200 x 100 - 616 x 400 mm	+5°, -20°	±3°	B

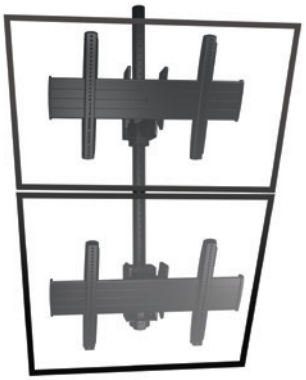

LCB1X2U 32 - 60" BACK-TO-BACK STACKED

The back-to-back version of the LCM1x2U stacks two screens per side for four total screens and a 121.9 cm perforated CPA column.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
45.3 kg	420 x 681 x 259 mm	200 x 100 - 616 x 400 mm	+5°, -20°	±3°	B

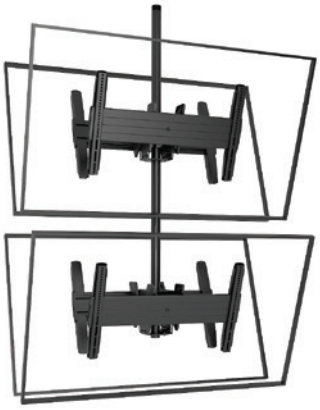

LCM4U 32 - 65" QUAD MOUNT

Allows four screens to be installed on a single column drop for 360° viewing capabilities. Comes with Fusion interfaces.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
38 kg	475 x 1422 x 1422 mm	200 x 200 - 600 x 400 mm	+5°, -20°	±3°	B

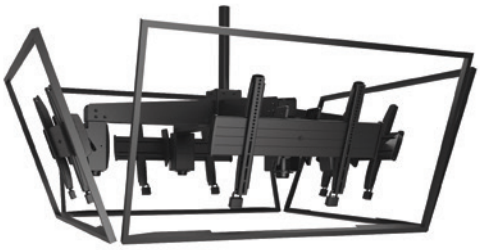

LCM3U 32 - 65" TRIPLE MOUNT

Allows three screens to be installed on a single column drop for 360° viewing capabilities. Comes with Fusion interfaces.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
57 kg	462 x 1184 x 1184 mm	200 x 200 - 600 x 400 mm	+5°, -20°	±3°	B

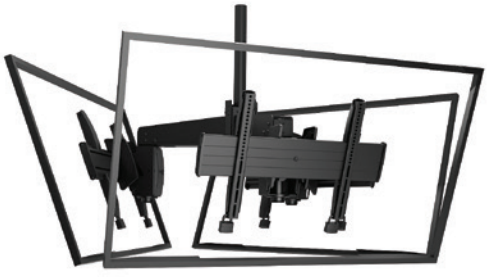

MCM1U 26 - 50" CEILING MOUNT

The medium version of the LCM1U accommodates smaller mounting patterns as well as portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	420 x 529 x 162 mm	200 x 100 - 460 x 400 mm	+5°, -20°	±3°	B

MCB1U 26 - 50" BACK-TO-BACK LANDSCAPE

Back-to-back version of the MCM1U for two total screens in landscape or portrait configurations. Fits 26 - 50" displays.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	419 x 529 x 259 mm	200 x 100 - 460 x 400 mm	+5°, -20°	±3°	B

MCM1X2U 26 - 50" STACKED LANDSCAPE

Stacked solution includes two MCM1U mounts and a 121.9 cm perforated CPA in a 1 wide x 2 tall configuration.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	419 x 529 x 162 mm	200 x 100 - 460 x 400 mm	+5°, -20°	±3°	B

MCB1X2U 26 - 50" BACK-TO-BACK STACKED

Back-to-back version of the MCM1x2U stacks two screens per side for four total screens and a 121.9 cm perforated CPA column.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
45.3 kg	420 x 529 x 259 mm	200 x 100 - 460 x 400 mm	+5°, -20°	±3°	B

FUSION™ VIDEO WALL, MENU BOARD & CEILING MOUNT ACCESSORIES

FCAX08/14/20	Compatibility
Video Wall Extension Brackets	Fusion Video Wall & Menu Board Ceiling Mounts

Model	Length
FCAX08	203 mm
FCAX14	356 mm
FCAX20	508 mm

FCAC	Compatibility
Menu Board Connector*	Fusion Ceiling-Mounted Menu Boards

** For alignment and aesthetics only – not for bearing load.*

FCA3U	Compatibility
Triple Ceiling Mount Adapter	Allows for integration of different mount heads like the LCM1U, MCM1U, RLC1, RMC1 and JHS mounts

FCA4U	Compatibility
Quad Ceiling Mount Adapter	Allows for integration of different mount heads like the LCM1U, MCM1U, RLC1, RMC1 and JHS mounts

FCA800/ FCA801	Compatibility
Above/Below Shelf, Large* Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Size	Weight Capacity
FCA800	203 mm	9.1 kg
FCA801	355 mm	9.1 kg

**Typical screen size: 46-70".*

FCA810/ FCA811	Compatibility
Above/Below Shelf, XL* Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Size	Weight Capacity
FCA810	203 mm	9.1 kg
FCA811	355 mm	9.1 kg

** Typical screen size: 70-100".*

FCA820/ FCA821	Compatibility
Fusion Center Camera Shelf	Fusion Ceiling, Freestanding and Wall Mounts

Model	Size	Weight Capacity
FCA820	203 mm	9.1 kg
FCA821	355 mm	9.1 kg

FCA802/ FCA812	Compatibility
Fusion Lower Component Shelf	All Fusion Series Mounts

Model	Size	Weight Capacity
FCA802	Large Displays	9.1 kg
FCA812	XL Displays	9.1 kg

FCA510/515	Compatibility
Storage Accessories	All Fusion Ceiling & Freestanding Mounts

Model	Dimensions (HxWxD)
FCA510	267 x 267 x 76 mm
FCA515	394 x 394 x 114 mm

FCA520	Max Equipment Depth	Compatibility
Universal Clamp Kit (Qty 2)	83 mm	All Fusion Ceiling & Freestanding Mounts

FUSION™ VIDEO WALL, MENU BOARD & CEILING MOUNT
ACCESSORIES

FCA830/ FCA840	Compatibility
Center Channel Speaker Adapter	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA830	52 - 80"	9.1 kg
FCA840	70 - 100"+	9.1 kg

FCA831/ FCA841	Compatibility
Center Channel Speaker Adapter	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA831	42 - 70"	4.5 kg/side
FCA841	50 - 95"	4.5 kg/side

FCACLIPS	Compatibility
Anchor Points for Zip Ties (Qty 10)	All Fusion Ceiling & Freestanding Mounts

CPA PIN CONNECTION
ACCESSORIES

CPA330	Weight Capacity
CPA Offset Ceiling Plate	226.8 kg

CPA395	Weight Capacity
CPA Angled Ceiling Plate	226.8 kg

CPA365	Weight Capacity
CPA Truss Adapter	226.8 kg

CPA262	Weight Capacity
CPA to NPT Column Connection Adapter (contains male 1-1/2" NPT threads and accepts Chief CPA columns)	226.8 kg

Model	Color
CPA262	B (shown)
CPA262S	S

CPA263	Weight Capacity
CPA column to CPA column connector	226.8 kg

CPA264	Weight Capacity
NPT to CPA Column Connection Adapter (contains female 1-1/2" NPT threads and accepts Chief's CPA columns)	226.8 kg

CPA Columns	Weight Capacity
Fixed, pin-connection extension columns available in black, silver and white†	226.8 kg

Model	Length
CPAE030	300 mm
CPAE080	800 mm
CPAE100	1000 mm
CPAE150	1500 mm
CPAE300	3000 mm

† All part numbers listed are black. To order alternate colors add a W (white) to the end of the part number.

CMA274	Compatibility
Quick-Snap Cable Cover	CPA Columns

CMA275	Compatibility
Quick-Snap Cable Covers (3 pack)	CPA Columns

AUTOMATED CEILING LIFT
FEATURES

CONTROL OPTIONS

SMOOTH EXTENSION

CONTROL OPTIONS
Multiple control option include serial communication, dry contact control and IR remote (included).

SMOOTH EXTENSION
Fast and quiet travel at more than 51 mm per second with preset viewing positions.

CLICKCONNECT™
Hear an audible click when the screen engages with the mount. Easy to connect/disconnect – no tools needed!

CABLE MANAGEMENT
Unique cable management system allows cables to move freely with the lift.

CM2C40UI 32 - 61" CEILING LIFT

Chief's automated ceiling lift with multiple control options including serial communication, dry contact control and IR remote.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Extension	Overall Travel	Compatibility
86.2 kg	794 x 603 x 197 mm	200 x 200 - 862 x 517 mm	1800 mm	1020 mm	230VAC, 50Hz

OTHER CEILING, TRUSS & POLE MOUNTS

TPSU 42 - 71" FIXED TRUSS & POLE MOUNT

L

This fixed solution for truss and pole mounting supports portrait and landscape orientations with the Q-Latch™ mounting system.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Truss Systems	Orientation
68 kg	412 x 433 x 27 mm	200 x 200 - 862 x 517 mm	356 mm (OD)	Landscape, Portrait

TPMU 42 - 71" TILT POLE MOUNT

L

Mounts to poles with multiple tilt adjustment options along with portrait and landscape orientations with Q-Latch™ mounting system.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Tilt Locking Points	Orientation
68 kg	412 x 433 x 86 mm	200 x 200 - 862 x 517 mm	+5°,-15°	0°, 5°, 10° and 15°	Landscape, Portrait

JPPU 26 - 45" PIVOT/TILT POLE MOUNT

M

Pole clamp supports portrait and landscape orientations with Centris™ fingertip tilt in all directions.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Pivot/ Tilt	Pole Diameter	Color
34 kg	189 x 152 x 89 mm	100 x 100 - 400 x 400 mm	±15°	38 - 51 mm	S B

K0P100B SINGLE MONITOR POLE MOUNT

S 1 2 3

Easily attaches a monitor to a pole and provides smooth pivot and tilt adjustment.

Column Diameter Range	Weight Capacity	Mounting Patterns (W,H)	Tilt	Min. Depth From Pole	Typical Screen Size	Color
38 – 48 mm	18.14 kg	75 x 75 - 100 x 100 mm	+75°, -10°	66 mm	10 – 30"	B

OTHER CEILING MOUNT ACCESSORIES

PAC715/716	Compatibility
Video Conferencing Camera Shelves - Above or Below	TPS, TPM, TPP & Other Q-Latch Mounts

Model	Dimensions (WxD)	Weight Capacity
PAC715	229 x 223 mm	4.5 kg
PAC716	356 x 301 mm	4.5 kg

IR10	Compatibility
Infrared Remote Control	CM2C40, CM2L40

PAC102	Compatibility
Component Pole Shelf	1-1/2" NPT and CPA Columns

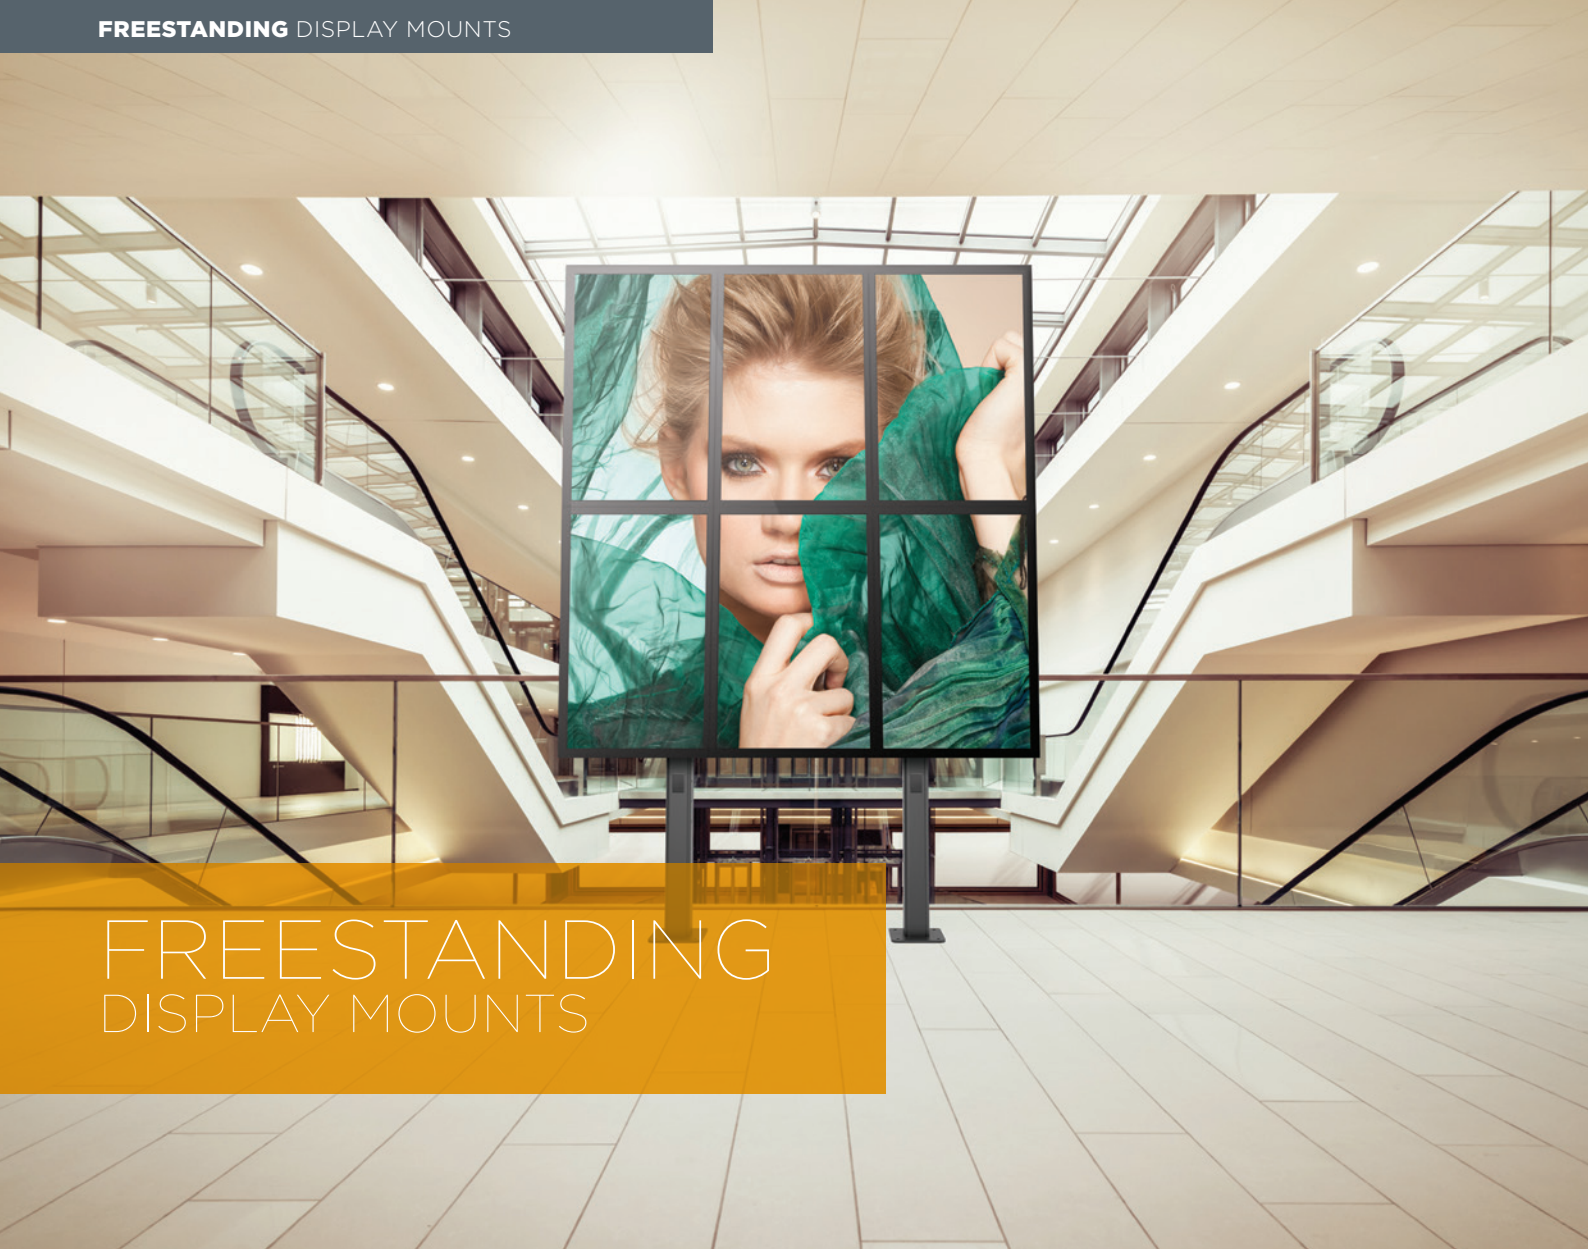

FREESTANDING
DISPLAY MOUNTS

FUSION™ VIDEO WALL
FEATURES

INDEPENDENT ADJUSTMENT

INDEPENDENT, TOOL-FREE ADJUSTMENT
Separate knobs for micro-height and plumb adjustment help to easily align displays without tools.

CONTINUOUS ADJUSTMENT
Continuous vertical and lateral adjustments allow for tight display rows and columns.

CABLE MANAGEMENT
FCACLIPS can be added at any point along the crossbars to create anchor points for easy cable management.

INSTALLATION OPTIONS
Configurations come in cart or bolt-down applications to meet temporary or permanent signage needs.

60" OPTION

ADD EXTENSION
FCAX accessories increase rail length for larger displays, up to 60" (152 cm).

LVM3X3U 42 - 46" LANDSCAPE CART

60" OPTION

The landscape-oriented, 3 wide x 3 tall configuration with smooth rolling casters for large, temporary video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
45.4 kg	2350 x 2743 x 1026 mm	Any Width x 100 - 400 mm	19 mm	19 mm

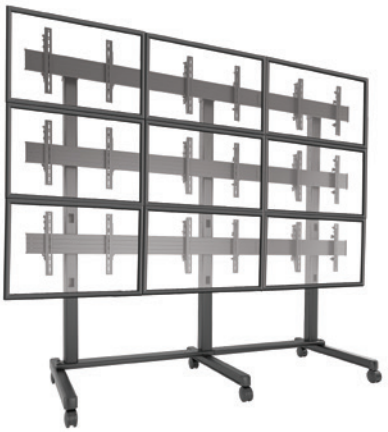

LBM3X3U 42 - 46" LANDSCAPE BOLT-DOWN

60" OPTION

The landscape-oriented, 3 wide x 3 tall configuration for large, bolt-down video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
45.4 kg	2310 x 2763 x 239 mm	Any Width x 100 - 400 mm	19 mm	19 mm

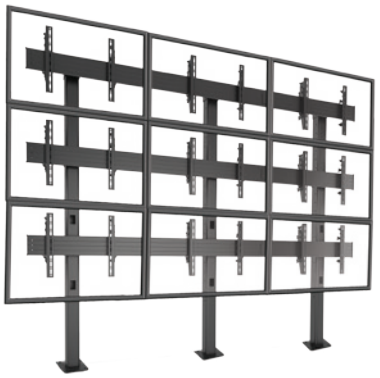

LVM3X2U 42 - 46" LANDSCAPE CART

60" OPTION

The landscape-oriented, 3 wide x 2 tall configuration with smooth rolling casters for large, temporary video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	1893 x 2743 x 1026 mm	Any Width x 100 - 400 mm	19 mm	19 mm

LVM3X2UP 42 - 46" PORTRAIT CART

60" OPTION

The portrait version of the LVM3X2U.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
45.4 kg	2710 x 1727 x 1026 mm	100 - 800 mm x Any Height	19 mm	19 mm

LBM3X2U 42 - 46" LANDSCAPE BOLT-DOWN

60" OPTION

The landscape-oriented, 3 wide x 2 tall configuration for large, bolt-down video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	1852 x 2766 x 239 mm*	Any Width x 100 - 400 mm	19 mm	19 mm

** Height is increased with FCABX accessories.*

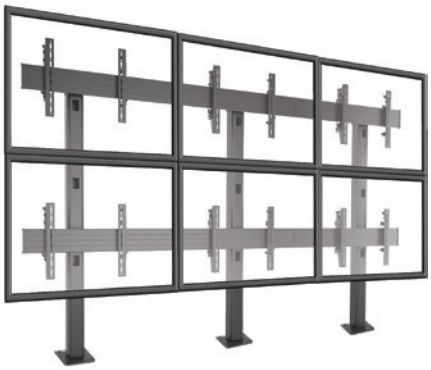

LBM3X2UP 42 - 46" PORTRAIT BOLT-DOWN

60" OPTION

The portrait version of the LBM3X2U.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
45.4 kg	2504 x 1727 x 244 mm*	100 - 800 mm x Any Height	19 mm	19 mm

** Height is increased with FCABX accessories.*

LVM3X1UP 42 - 46" PORTRAIT CART

60" OPTION

The portrait-oriented, 3 wide x 1 tall configuration with smooth rolling casters for temporary menu boards.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	2253 x 1727 x 1026 mm	100 - 800 mm x Any Height	19 mm	19 mm

LBM3X1UP 42 - 46" PORTRAIT BOLT-DOWN

60" OPTION

The portrait-oriented, 3 wide x 1 tall configuration for bolt-down menu boards.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	2047 x 1727 x 244 mm*	100 - 800 mm x Any Height	19 mm	19 mm

** Height is increased with FCABX accessories.*

LBM1X3U 42 - 65" LANDSCAPE BOLT-DOWN

Landscape-oriented, 1 wide x 3 tall configuration ideal for retail environments.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	2145 x 914 x 191 mm	100 x 100 mm – 900 x 400 mm	19 mm	19 mm

LVM2X2U 42 - 50" LANDSCAPE CART

60" OPTION

Our top performing, landscape-oriented, 2 wide x 2 tall configuration with smooth rolling casters for large, temporary video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	2045 x 1842 x 1026 mm	Any Width x 100 - 400 mm	19 mm	19 mm

LVM2X2UP 42 - 50" PORTRAIT CART

60" OPTION

The portrait version of the LVM2X2U.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
45.4 kg	2710 x 1168 x 1026 mm	100 - 800 mm x Any Height	19 mm	19 mm

LBM2X2U 42 - 50" LANDSCAPE BOLT-DOWN

60" OPTION

The landscape-oriented, 2 wide x 2 tall configuration for bolt-down video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	1852 x 1852 x 239 mm*	Any Width x 100 - 400 mm	19 mm	19 mm

** Height is increased with FCABX accessories.*

LBM2X2UP 42 - 50" PORTRAIT BOLT-DOWN

L 60" OPTION

The portrait version of the LBM2X2U.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
45.4 kg	2504 x 1168 x 240 mm*	100 - 800 mm x Any Height	19 mm	19 mm

** Height is increased with FCABX accessories.*

LBM1X2U 42 - 80" LANDSCAPE BOLT-DOWN

L

Landscape-oriented, 1 wide x 2 tall configuration ideal for retail environments.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	1689 x 914 x 191 mm	100 x 100 mm – 900 x 400 mm	19 mm	19 mm

LBM1X2UP 42 - 80" PORTRAIT BOLT-DOWN

L

Portrait-oriented, 1 wide x 2 tall configuration ideal for retail environments.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	2145 x 914 x 191 mm	100 x 100 mm – 800 x 900 mm	19 mm	19 mm

XBM1U 42 - 80" LANDSCAPE BOLT-DOWN

XL

Landscape-oriented, single screen configuration for securing XL displays in prominent locations. .

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)*	Height Adjust (per screen)	Plumb Adjust
113 kg	2143 x 914 x 191 mm	100 x 100 mm – 900 x 400 mm	19 mm	19 mm

**Interface adapters for larger mounting hole patterns are available, please contact your customer service team for the correct part codes and to verify compatibility.*

XBM1UP 42 - 80" PORTRAIT BOLT-DOWN

Portrait-oriented, single screen configuration for securing XL displays in prominent locations.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
113 kg	2083 x 914 x 191 mm	100 x 100 mm – 800 x 900 mm	19 mm	19 mm

FUSION™ VIDEO WALL
ACCESSORIES

60" OPTION

FCAX08/14/20	Compatibility
Video Wall Extension Brackets	Fusion Video Wall & Menu Board Ceiling Mounts

Model	Length
FCAX08	203 mm
FCAX14	356 mm
FCAX20	508 mm



FCA2X1U	Compatibility
LVM & LBM 2x1 Accessory	LVM2X2U, LBM2X2U

FCA3X1U	Compatibility
LVM & LBM 3x1 Accessory	LVM3X2U, LBM3X2U

FCABX18	Compatibility
Fusion LBM Video Wall Height Extensions - 457 mm (18")	Fusion LBM Bolt-Down Mounts

FCABX36	Compatibility
Fusion LBM Video Wall Height Extensions - 914 mm (36")	Fusion LBM Bolt-Down Mounts

FCA802/ FCA812	Compatibility
Component Shelf, Large and XL Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA802	46 – 70"	9.1 kg
FCA812	70 – 100"	9.1 kg

FCA800/ FCA801	Compatibility
Above/Below Shelf, Large* Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Size	Weight Capacity
FCA800	203 mm	9.1 kg
FCA801	355 mm	9.1 kg

**Typical screen size: 46-70".*

FCA810/ FCA811	Compatibility
Above/Below Shelf, XL* Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Size	Weight Capacity
FCA810	203 mm	9.1 kg
FCA811	355 mm	9.1 kg

** Typical screen size: 70-100".*

FCA820/ FCA821	Compatibility
Fusion Center Camera Shelf	Fusion Ceiling, Freestanding and Wall Mounts

Model	Size	Weight Capacity
FCA820	203 mm	9.1 kg
FCA821	355 mm	9.1 kg

† Available spring, 2015.

FCA510/515	Compatibility
Storage Accessories	All Fusion Ceiling & Freestanding Mounts

Model	Dimensions (HxWxD)
FCA510	267 x 267 x 76 mm
FCA515	394 x 394 x 114 mm

FCA520	Max Equipment Depth	Compatibility
Universal Clamp Kit (Qty 2)	83 mm	All Fusion Ceiling & Freestanding Mounts

FUSION™ VIDEO WALL
ACCESSORIES

FCA830/ FCA840†	Compatibility
Center Channel Speaker Adapter	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA830	52 - 80"	9.1 kg
FCA840	70 - 100"+	9.1 kg

FCA831/ FCA841†	Compatibility
Center Channel Speaker Adapter	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA831	42 - 70"	4.5 kg/side
FCA841	50 - 95"	4.5 kg/side

FCACLIPS	Compatibility
Cable Quick Ties (Qty 10)	All Fusion Ceiling & Freestanding Mounts

FCA776	Compatibility
LVM Leveling Feet	Fusion LVM Video Wall Mounts

FUSION™ CARTS & STANDS

FEATURES

HEIGHT ADJUST
Turn knob allows a single user to raise or lower the viewing height of the screen by hand or power drill.

CABLE MANAGEMENT
Flexible cable covers allow access at any point along the column while concealing cables for a clean installation.

CUSTOMIZABLE
A host of available accessories allows for customized solutions to meet any need.

LOCKING CASTORS
Smooth rolling and lockable castors make transportation and positioning easy.

XVAU 37 - 70" VIDEO CONFERENCE CART

XL

Aesthetically designed cart with two-toned finish ships fully assembled with 11 RUs of storage space for rack mountable and non-rack mountable AV components. Dual display adapter available, see page 93.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
113 kg	1395 x 986 x 737 mm	200 x 200 - 800 x 400 mm	1064 - 1280 mm	±2.5°	S B

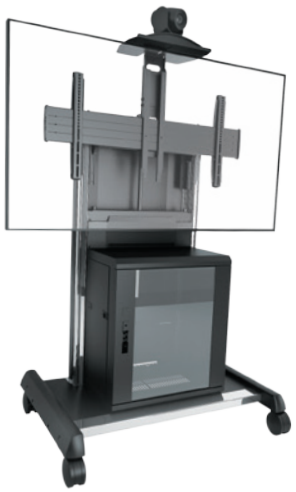

XPAU 55 - 100"+ HEAVY-DUTY CART

XL

Includes a built-in 2U rack space for AV equipment while supporting heavy displays up to 136 kg. Great for video conferencing when used with the dual display accessory. Dual display adapter available, see page 93.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)*	Center of Display to Floor Range	Tilt	Color
136 kg	1877 x 1472 x 878 mm	200 x 200 - 800 x 400 mm	1213 - 1662 mm	±5°	S B

**Interface adapters for larger mounting hole patterns are available, please contact your customer service team for the correct part codes and to verify compatibility.*

LPAU 40 - 80" HEIGHT-ADJUSTABLE CART

This popular, aesthetically designed cart works well in classrooms and corporate environments.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Color
90.7 kg	1801 x 1143 x 844 mm	200 x 200 - 800 x 400 mm	1271 x 1779 mm	±5°	S B

LFAU 40 - 80" HEIGHT-ADJUSTABLE STAND

The stand version of the LPAU for semi-permanent installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust	Tilt	Color
90.7 kg	1839 x 968 x 777 mm	200 x 200 - 800 x 400 mm	1130 - 1640 mm	±5°	S B

MPAU 37 - 55" HEIGHT-ADJUSTABLE CART

A smaller version of the LPAU for narrower and shorter mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Color
56.7 kg	1979 x 1214 x 813 mm	200 x 100 - 600 x 400 mm	1270 - 1770 mm	±5°	S B

MFAU 37 - 55" HEIGHT-ADJUSTABLE STAND

A smaller version of the LFAU for narrower and shorter mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Color
56.7 kg	1839 x 968 x 777 mm	200 x 100 - 600 x 400 mm	1130 - 1630 mm	±5°	S B

VIEWSHARE VIDEO CONFERENCING KITS
FEATURES & SPECIFICATIONS

FLEXIBLE PLACEMENT
HD camera can be installed above, below or between displays.

EASY CONNECTIVITY
ViewShare is fast and easy to setup using familiar USB connectivity, simplifying adoption for end users.

PEER-TO-PEER SOFTWARE
ViewShare's components are Skype™ for Business Certified, and optimized for Lync™ and Skype.

THE RIGHT SIZED SOLUTION
ViewShare kits are available with and without a USB to CAT5 extender to suite a variety of room sizes. For huddle spaces and small conference rooms order the FCA800V, FCA810V or FCA820V. For larger conference rooms order the FCA800VE, FCA810VE or FCA820VE.

WHAT'S INCLUDED?
- Mount accessory with integrated HD camera (Logitech C930E)
- USB 2.0 type A cable (305 mm)
- Belkin® powered USB hub
- Jabra® 410MS USB speakerphone
- Black Box® USB to CAT5 extender with power supply (on E models only)

SYSTEM REQUIREMENTS
- Windows 7 or 8
- Mac OSX 10.7 or higher
- 2.4 GHz Dual Core processor or better
- 2 GB RAM or more
- USB 2.0 port (USB 3.0 ready)

BELKIN USB HUB

USB 2.0 CABLE

BLACK BOX USB TO CAT5 EXTENDER

JABRA USB SPEAKERPHONE

FCA800V/810V/820V	Compatibility
ViewShare Video Conference Kits without Extender	Fusion Series cart, stand and wall mounts

Model	Display Sizes	Camera Placement
FCA800V	Large	Above/Below
FCA810V	XL	Above/Below
FCA820V	Large & XL	Center

FCA800VE/810VE/820VE	Compatibility
ViewShare Video Conference Kits with Extender	Fusion Series cart, stand and wall mounts

Model	Display Sizes	Camera Placement
FCA800VE	Large	Above/Below
FCA810VE	XL	Above/Below
FCA820VE	Large & XL	Center

FUSION™ CART & STAND
ACCESSORIES

FCA623*	Color	Compatibility
Dual Display Adapter Accessory	S B	XPAU, XVAU

**XPAU cart shown with FCA623 Dual display adapter.*

FCA612	Dimensions (WxD)	Weight Capacity	Compatibility
Large, Height-Adjustable Accessory Shelf	1219 x 529 mm	11.3 kg	MPAU, MFAU, LPAU, LFAU, XPAU



FCA611	Dimensions (WxD)	Weight Capacity	Compatibility
Small, Height-Adjustable Accessory Shelf	619 x 386 mm	11.3 kg	MPAU, MFAU, LPAU, LFAU

FCA650/651	Compatibility
Large & Medium CPU Holders	MPAU, MFAU, LPAU, LFAU

Model	Max Equipment Size (HxWxD)
FCA650	381 x 130 x 381 mm
FCA651	254 x 92 x 254 mm

FCA510/515	Compatibility
Storage Accessories	All Fusion Ceiling & Freestanding Mounts

Model	Dimensions (HxWxD)
FCA510	267 x 267 x 76 mm
FCA515	394 x 394 x 114 mm

FCA520	Max Equipment Depth	Compatibility
Universal Clamp Kit (Qty 2)	83 mm	All Fusion Ceiling & Freestanding Mounts

FCA800/FCA801	Compatibility
Above/Below Shelf, Large* Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Size	Weight Capacity
FCA800	203 mm	9.1 kg
FCA801	355 mm	9.1 kg

**Typical screen size: 46-70".*

FCA810/FCA811	Compatibility
Above/Below Shelf, XL* Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Size	Weight Capacity
FCA810	203 mm	9.1 kg
FCA811	355 mm	9.1 kg

** Typical screen size: 70-100".*

FCA820/FCA821	Compatibility
Fusion Center Camera Shelf	Fusion Ceiling, Freestanding and Wall Mounts

Model	Size	Weight Capacity
FCA820	203 mm	9.1 kg
FCA821	355 mm	9.1 kg

FCA802/FCA812	Compatibility
Component Shelf, Large Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA802	46 – 70"	9.1 kg
FCA812	70 – 100"	9.1 kg

FCA830/FCA840†	Compatibility
Center Channel Speaker Adapter	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA830	52 - 80"	9.1 kg
FCA840	70 - 100"+	9.1 kg

FUSION™ CART & STAND
ACCESSORIES

FCA831/FCA841†	Compatibility
Center Channel Speaker Adapter	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts

Model	Typical Screen Size	Weight Capacity
FCA831	42 - 70"	4.5 kg/side
FCA841	50 - 95"	4.5 kg/side

FCACLIPS	Compatibility
Anchor Points for Zip Ties (Qty 10)	All Fusion Ceiling & Freestanding Mounts

AUTOMATED POP-UP LIFT
FEATURES

CONTROL OPTIONS

SMOOTH EXTENSION

CONTROL OPTIONS
Multiple control options include serial communication, dry contact control and IR remote (included).

SMOOTH EXTENSION
Fast and quiet travel at more than 51 mm per second with preset viewing positions.

CLICKCONNECT™
Hear an audible click when the screen engages with the mount. Easy to connect/disconnect – no tools needed!

CABLE MANAGEMENT
Unique cable management system allows cables to move freely with the lift.

CM2L40UI 32 - 61" POP-UP LIFT

An automated floor lift with multiple control options including serial communication and IR remote.

Weight Capacity	Dimensions (HxWxD) (Retracted)	Mounting Patterns (W,H)	Max Extension	Overall Travel	Compatibility
86.2 kg	778 x 603 x 195 mm	200 x 200 - 862 x 517 mm	1803 mm	1016 mm	230VAC, 50Hz

OTHER CARTS & STANDS
MOUNTS

PFCU 42 - 71" HEIGHT-ADJUSTABLE CART

A collapsible mobile cart for portrait and landscape orientations – ideal for corporate and rental/staging applications.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor range	Tilt	Color
90.7 kg	2073 x 943 x 816 mm	200 x 200 - 862 x 517 mm	1220 x 1830 mm	±15°	B

PF1U 42 - 71" HEIGHT-ADJUSTABLE STAND

A solid, low profile single display floor stand with integrated cable management and support for both portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Color
90.7 kg	2388 x 914 x 762 mm	200 x 200 - 862 x 517 mm	1300 - 2170 mm	±15°	B

MFCU 30 - 55" HEIGHT-ADJUSTABLE CART

Smaller version of the PFC with landscape and portrait orientation capability.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Color
56.7 kg	1975 x 943 x 816 mm	100 x 100 - 709 x 431 mm	1220 - 1830 mm	±15°	B

MF1U 30 - 55" HEIGHT-ADJUSTABLE STAND

A solid, low profile single display floor stand with integrated cable management.
Supports portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Color
56.7 kg	2327 x 914 x 762 mm	100 x 100 - 709 x 431 mm	1300 - 2180 mm	±15°	B

OTHER CARTS & STANDS
ACCESSORIES

PAC722	Compatibility
P-Series Dual Side-by-Side Display Accessory	PFC, PF1

MAC722	Compatibility
M-Series Dual Side-by-Side Display Accessory	MFC, MF1

PAC715/716	Compatibility
Video Conferencing Camera Shelves - Above or Below	P-Series (356 x 356 mm) & M-Series (200 x 200 mm) Q-Latch

Model	Dimensions (WxD)	Weight Capacity
PAC715	229 x 223 mm	4.5 kg
PAC716	356 x 301 mm	4.5 kg

PAC710	Dimensions (WxD)	Weight Capacity	Compatibility
Height Adjustable Accessory Shelf	457 x 305 mm	11.3 kg	P- & M-Series Carts & Floor Stands

PAC730A	Max Equipment Size (HxWxD)	Compatibility
Secure Storage Shelf w/ Lock	89 x 445 x 305 mm	P- & M-Series Carts & Floor Stands



PAC400	Compatibility
P-Series Rotation Adapter	PDR, PNR & Other Q-Latch Mounts

PACTP1	Compatibility
Touch Panel Stabilizer Kit	P- & M-Series Carts & Floor Stands

KFA220B/S	Compatibility
Dual Monitor Accessory - Black / Silver	P- & M-Series Carts & Floor Stands

KFA225B/S	Compatibility
Widescreen Dual Monitor Accessory - Black / Silver	P- & M-Series Carts & Floor Stands

KFA320B/S	Compatibility
Triple Monitor Accessory - Black / Silver	P- & M-Series Carts & Floor Stands

KFA325B/S	Compatibility
Widescreen Triple Monitor Accessory - Black / Silver	P- & M-Series Carts & Floor Stands

TABLE STAND DISPLAY
MOUNTS

STLU 32 - 52" TABLE STAND

M

This bolt-down swivel table stand ships with security hardware – ideal for hospitality installs.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Swivel Options
56.7 kg	603 x 698 x 140 mm	100 x 100 - 600 x 400 mm	15°, 30°, 45° or 90°

PTSU 30-50" TABLE STAND

M

Stylish solutions for residential, commercial and business applications.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust
45.4 kg	545 x 607 x 278 mm	200 x 200 – 860 x 515 mm	102 mm

STS1 18 - 30" BOLT-DOWN TABLE STAND

S

This secure, bolt-down table stand for small screens provides swivel and tilt capability – ideal for point of sale applications.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust	Pivot/ Tilt	Swivel Range Options
13.6 kg	409 x 152 x 175 mm	75 x 75 - 100 x 100 mm	130 mm	±15°	90˚, 180˚, 270˚

DESK
MONITOR MOUNTS

(Shown with Apple® Cinema Display adapter, not included.)

KONTOUR™ K1 DYNAMIC HEIGHT-ADJUST DESK MOUNTS
FEATURES

HEAVY DUTY DESIGN
Features sleek, solidly constructed forged aluminum arms.

ULTIMATE FLEXIBILITY
Gas-spring technology provides smooth dynamic height adjustment up to 330 mm and enables ideal positioning.

CABLE MANAGEMENT
Tool-free cable management covers create a clean, professional look.

FAST INSTALLATION
Simple 3-step installation and integrated quick-connect monitor interface makes mounting and maintenance easy.

CENTRIS® EXTREME TILT
Tilts -75°/+10° for the ultimate ergonomic solution.

MOUNTING PATTERN
Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

K1C220 DUAL MONITOR COLUMN CLAMP

This dynamic mount provides extended reach for 2 monitors. Offers independent manual height adjust on the column up to 178 mm and dynamic height adjust up to 330 mm. For reduced height: K1C220_XRH.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
62 mm	523 mm	2.3 - 9.9 kg	S B

K1C210 DUAL MONITOR COLUMN CLAMP

Provides a low-profile solution for 2 monitors installed next to a cubical wall or adjacent desk, with 178 mm independent manual height adjust and dynamic height adjust up to 330 mm. Features single-link arms.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
62 mm	352 mm	2.3 - 11.3 kg	S B

K1C22H DUAL MONITOR COLUMN CLAMP ARRAY

Securely holds 2 monitors on an array bar. Offers manual height adjust on the column up to 178 mm and dynamic height adjust up to 330 mm with dual-link arm. For reduced height: K1C22H_XRH.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Max Display Width	Colors
156 mm	587 mm	0.9 - 4.08 kg	632 mm	S B

K1C120 SINGLE MONITOR COLUMN CLAMP

Dynamic dual-link mount provides extended reach for a single monitor. Offers manual height adjustment on the column up to 178 mm and dynamic height adjustment up to 330 mm. For reduced height: K1C120_XRH.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
62 mm	571 mm	2.3 - 9.9 kg	S B

K1C110 SINGLE MONITOR COLUMN CLAMP

Dynamic single-link mount provides extended reach for a single monitor. Offers manual height adjustment on the column up to 178 mm and dynamic height adjustment up to 330 mm.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
62 mm	400 mm	2.3 - 11.3 kg	S B

K1D230 DUAL MONITOR DESK CLAMP

Featuring triple-link arms, this dynamic mount securely holds 2 monitors and provides 330 mm of dynamic height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
62 mm	714 mm	2.3 - 4.54 kg	S B

K1D220 DUAL MONITOR DESK CLAMP

Featuring dual-link arms, this dynamic mount securely holds 2 monitors and provides 330 mm of dynamic height adjustment. For reduced height: K1D220_XRH.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
62 mm	548 mm	2.3 - 11.3 kg	S B

K1D22H DUAL MONITOR DESK ARRAY

Securely holds 2 monitors on an array bar allowing for perfect alignment and low-profile placement. Flexible dual-link arm offers dynamic height adjustment up to 330 mm. For reduced height: K1D22H_XRH.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Max Display Width	Colors
109 mm	538 mm	0.9 - 4.08 kg	632 mm	S B

K1D130 SINGLE MONITOR COLUMN CLAMP

Dynamic triple-link mount provides ultra-extended reach for a single monitor. Offers manual height adjustment on the column up to 178 mm and dynamic adjustment up to 330 mm.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
62 mm	648 mm	2.3 - 4.54 kg	S B

K1D120 SINGLE MONITOR DESK CLAMP

Dynamic dual-link mount securely holds a single monitor and provides up to 330 mm of dynamic height adjustment. For reduced height: K1D120_XRH.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
62 mm	523 mm	2.3 - 11.3 kg	S B

KONTOUR™ K1 DYNAMIC HEIGHT-ADJUST DESK MOUNTS
ACCESSORIES

KRA219	Compatibility
Table Clamp Mount Kit	K1 and K2 Series Mounts*

KRA220	Compatibility
Extension Arm Accessory	K1 and K2 Series Mounts*

KRA221	Compatibility
K1C Expansion Arm	Compatibility: K1 Series Column Mounts

KRA223	Compatibility
Dual Monitor Array Bar	K1 and K2 Series Mounts*

KRA224	Compatibility
Dual Monitor Array Bar Handle	KRA223

KRA225	Compatibility
Extreme Tilt Head Accessory	K1 and K2 Series Mounts*

KSA1250B	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products

KRA300	Compatibility
Laptop Accessory	K1 Series Mounts

FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

KRA234	Weight Capacity	Max Equipment Size (HxWxD)	Compatibility
Thin Client Accessory Bracket	2.3 kg	254 x 254 x 60 mm	K1 & K2 Series, TS118, FSR, FTR

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns

** Compatible with new K1 and K2 models only. Not compatible with discontinued models: K1C100, K1C200, K1C250, K1D100, K1D200, KS100, K1S200, K1W100, K1W200, K1P100, K1P200, K2C100, K2C200, K2P100, K2P200, K2W100 and K2W200.*

KONTOUR™ K2 DESK MOUNT
FEATURES

HEAVY DUTY DESIGN
Features sleek, solidly constructed forged aluminum arms.

ULTIMATE FLEXIBILITY
Column mount slides vertically along column for ideal positioning and provides 273 mm of manual height adjustment.

FAST INSTALLATION
Tear-drop hole pattern for easy mounting and maintenance.

CABLE MANAGEMENT
Tool-free cable management guide clips for a clean, professional look.

CENTRIS® TILT
Tilts ±15° for a flexible, ergonomic solution.

MOUNTING PATTERN
Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

K2C220 DUAL MONITOR COLUMN CLAMP

Dual monitor column clamp mounts easily to edge of desk. Features flexible dual-link arms with independent manual height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
105 mm	448 mm	9.9 kg	S B

K2C22H DUAL MONITOR COLUMN ARRAY

Securely holds 2 monitors on an array bar allowing for perfect alignment and low-profile placement. Flexible, dual-link arm offers manual height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Maximum Display Width	Colors
156 mm	499 mm	0.9 - 4.08 kg	632 mm	S B

K2C120 SINGLE MONITOR COLUMN CLAMP

Single monitor column clamp mounts easily to the edge of desk.
Features flexible dual-link arm with manual height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
152 mm	495 mm	9.9 kg	S B

K2C110 SINGLE MONITOR COLUMN CLAMP

Single monitor column clamp mounts easily to the edge of desk.
Features single-link arm with manual height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
152 mm	324 mm	9.9 kg	S B

KONTOUR™ K2 SERIES DESK MOUNT
ACCESSORIES

KRA219	Compatibility
Table Clamp Mount Kit	K1 and K2 Series Mounts*

KRA220	Compatibility
Extension Arm Accessory	K1 and K2 Series Mounts*

KRA221	Compatibility
K1C Expansion Arm	Compatibility: K1 Series Column Mounts

KRA223	Compatibility
Dual Monitor Array Bar	K1 and K2 Series Mounts*

KRA224	Compatibility
Dual Monitor Array Bar Handle	KRA223

KRA225	Compatibility
Extreme Tilt Head Accessory	K1 and K2 Series Mounts*

FSB4090B	Compatibility
Custom Interface Bracket for Cisco® EX90	K2 Series Mounts

KSA1250B	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products

FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

KRA234	Weight Capacity	Max Equipment Size (HxWxD)	Compatibility
Thin Client Accessory Bracket	2.3 kg	254 x 254 x 60 mm	K1 & K2 Series, TS118, FSR, FTR

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns

** Compatible with new K1 and K2 models only. Not compatible with discontinued models: K1C100, K1C200, K1C250, K1D100, K1D200, KS100, K1S200, K1W100, K1W200, K1P100, K1P200, K2C100, K2C200, K2P100, K2P200, K2W100 and K2W200.*

DESK ARRAY
MONITOR MOUNTS

KONTOUR™ K3 STATIC DESK ARRAYS
FEATURES

LATERAL SHIFT
Centris heads are easily moved along array arms for quick lateral shift adjustments.

ULTIMATE FLEXIBILITY
Independently height adjustable arms (and center head where applicable) provide seamless screen alignment. Arms can be adjusted from 0° to 15° for customized viewing angles.

HEAVY DUTY DESIGN
Features sleek, solidly constructed arms with that hold 6.8 kg per monitor.

CENTRIS® TILT
Offers up to ±12° of Centris fingertip tilt for effortless display positioning.

MODULARITY
Meets a wide range of monitor sizes and configurations. A great multi-array solution for call centers, security desks, IT, health care, control rooms and other multi-monitor settings.

MOUNTING PATTERN
Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

K3F220B FREESTANDING 2x2 ARRAY

Static freestanding array mount for monitors 2 wide x 2 tall.

Maximum Monitor Height	Maximum Monitor Width	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
460 mm	736 mm	±12°	10 - 27"	6.8 kg	B

K3G220B GROMMET MOUNTED 2x2 ARRAY

Static grommet array mount for monitors 2 wide x 2 tall. Compatible with desks 13 - 127 mm thick.

Maximum Monitor Height	Max Monitor Width	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
460 mm	736 mm	±12°	10 - 27"	6.8 kg	B

K3G320B GROMMET MOUNTED 3x2 ARRAY

Static grommet array mounts for monitors 3 wide x 2 tall. Compatible with desks 13 - 127 mm thick.

Max Monitor Width	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
Dual display - 1301 mm Triple display - 650 mm	Outer - ±12° Center - ±10°	Dual: up to 30" Triple: up to 27"	6.8 kg	B

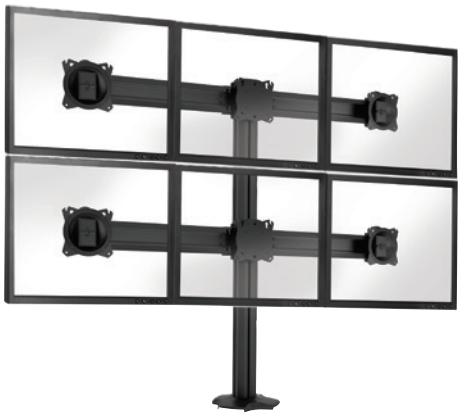

K3F310B FREESTANDING 3x1/2x1 ARRAY

Static freestanding array mount for 2 or 3 monitor/tablet combinations.
Telescoping rails add 203 mm per arm of additional lateral adjustment.

Maximum Monitor Width	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
Dual display - 1301 mm Triple display - 650 mm	Outer - ±12° Center - ±10°	Dual: up to 30" Triple: up to 27"	6.8 kg	B

K3G310B GROMMET MOUNTED 3x1/2x1 ARRAY

Static grommet array mount for 2 - 3 monitor/tablet combinations.
Telescoping rails add 203 mm per arm of additional lateral adjustment.

Monitor Width Range	Tilt	Typical Screen Size	Desktop Thickness	Weight Capacity (per monitor)	Colors
Dual display - 1301 mm Triple display - 650 mm	Outer - 12° Center - 10°	Dual: up to 30" Triple: up to 27"	13 - 127 mm	6.8 kg	B

K3F120B FREESTANDING 1x2 ARRAY

Static freestanding array mount for 2 monitors arranged vertically.

Maximum Monitor Height	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
460 mm	±10°	10 - 30"	6.8 kg	B

K3G120B GROMMET MOUNTED 1x2 ARRAY

Static grommet array mount for 2 monitors arranged vertically.
Compatible with desks 13 - 127 mm thick.

Maximum Monitor Height	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
460 mm	±10°	10 - 30"	6.8 kg	B

KONTOUR™ K3 SERIES DESK ARRAY
ACCESSORIES

KRA500	Compatibility
Desk Clamp Accessory	K3 Series Mounts

KSA1250	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products

FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns

KONTOUR™ K4 DEPTH-ADJUSTABLE DESK ARRAYS

FEATURES

FOCAL DEPTH ADJUSTMENT
Provides articulating focal depth adjustment for optimal ergonomics in multi-user environments, allowing you to reposition the bank of screens to a preferred viewing distance.

EXCEPTIONAL FLEXIBILITY
Swivel and pan adjustment capability and Centris® Fingertip Tilt for ideal screen positioning. Also includes an integrated handle for quick ergonomic adjustment to fit the user.

AESTHETIC DESIGN
Form meets function with the K4 Series. Solidly constructed, forged aluminum arms are sleekly designed for a clean appearance.

MOUNTING PATTERN
Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

CENTRIS® TILT
Offers up to ±12° of Centris™ fingertip tilt for effortless display positioning.

K4G610B GROMMET MOUNTED 6x1 ARRAY

Grommet array mount for 6 monitors in a row with two anchor points.
Extends up to 412 mm and offers ±12° tilt and 20° arm rotation.

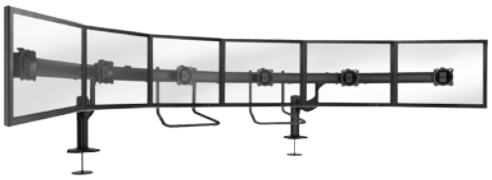

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
291 - 463 mm	614 mm	815 mm	up to 24"	6.8 kg	25 - 125 mm

K4G510B GROMMET MOUNTED 5x1 ARRAY

Grommet array mount for 5 monitors in a row with two anchor points.
Extends up to 412 mm and offers ±12° tilt and 20° rotation.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
291 - 463 mm	614 mm	592 mm	up to 24"	6.8 kg	25 - 125 mm

K4G410B GROMMET MOUNTED 4x1 ARRAY

Grommet array mount for 4 monitors in a row with two anchor points.
Extends up to 412 mm and offers ±12° tilt and 20° rotation.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
291 - 463 mm	614 mm	396 mm	up to 24"	6.8 kg	25 - 125 mm

K4G310B GROMMET MOUNTED 3x1 ARRAY

Grommet array mount for 3 monitors in a row with one anchor point
Extends up to 412 mm and offers ±12° tilt and 20° rotation.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
291 - 463 mm	614 mm	239 mm	up to 24"	6.8 kg	25 - 125 mm

K4G210B GROMMET MOUNTED 2x1 ARRAY

Grommet array mount for 2 monitors in a row with one anchor point.
Extends up to 412 mm and offers ±12° tilt and 20° rotation.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
291 - 463 mm	943 mm	239 mm	up to 24"	6.8 kg	25 - 125 mm

K4G120B GROMMET MOUNTED 1x2 ARRAY

Grommet array mount for 2 monitors stacked with one anchor point.
Offers ±10° tilt.

Center of Display to Table Range	Max. Monitor Height	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
291 - 463 mm	406 mm	239 mm	up to 24"	6.8 kg	25 - 125 mm

K4G620B GROMMET MOUNTED 6X2 ARRAY

Grommet array mount for 12 monitors stacked with two anchor points.
Extends at least 305 mm and offers ±12° tilt.

Center of Display to Table Range	Max. Monitor Height	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
269 - 1107 mm	584 mm	815 mm	up to 24"	6.8 kg	25 - 125 mm

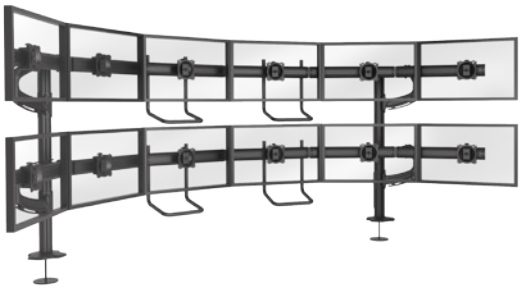

K4G520B GROMMET MOUNTED 5X2 ARRAY

Grommet array mount for 10 monitors in two rows with two anchor points.
Extends at least 305 mm and offers ±12° tilt.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
269 - 1107 mm	584 mm	592 mm	up to 24"	6.8 kg	25 - 125 mm

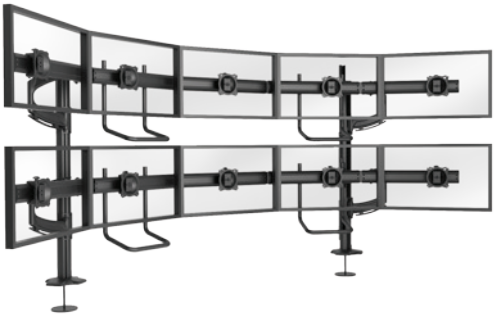

K4G420B GROMMET MOUNTED 4X2 ARRAY

Grommet array mount for 8 monitors in two rows with two anchor points.
Extends at least 305 mm and offers ±12° tilt.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
269 - 1107 mm	584 mm	396 mm	up to 24"	6.8 kg	25 - 125 mm

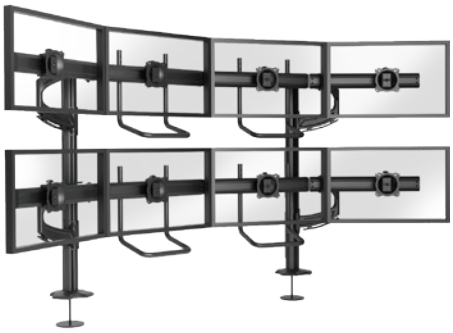

K4G320B GROMMET MOUNTED 3x2 ARRAY

Grommet array mount for 6 monitors in two rows with one anchor point.
Extends at least 305 mm and offers ±12° tilt.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
269 - 1107 mm	584 mm	318 mm	up to 24"	6.8 kg	25 - 125 mm

KONTOUR™ K4 SERIES DESK ARRAY
ACCESSORIES

KSA1250	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products

FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns

WALL
MONITOR MOUNTS

KONTOUR™ K1 SERIES WALL MOUNT
FEATURES

HEAVY DUTY DESIGN
Features sleek and solid forged aluminum arms.

ULTIMATE FLEXIBILITY
Gas-spring technology provides smooth dynamic height adjustment up to 330 mm and enables ideal monitor positioning.

FAST INSTALLATION
Simple 3-step installation and integrated quick-connect interface for easy mounting and maintenance.

CABLE MANAGEMENT
Tool-free cable management covers create a clean, professional look.

CENTRIS® EXTREME TILT
Tilts -75°/+10° for an ultimate ergonomic solution.

MOUNTING PATTERN
Compatible with 75 x 75 mm and 100 x 100 mm VESA patterns.

K1W220 DUAL MONITOR WALL MOUNT

Featuring flexible dual-link arms, this dynamic mount securely attaches two monitors.

Minimum Depth from Wall	Maximum Extension	Weight Capacity (per monitor)	Colors
62 mm	525 mm	2.3 - 11.3 kg	B

K1W120 SINGLE MONITOR WALL MOUNT

Dynamic mount securely attaches a single monitor.
Features flexible dual-link arm.

Minimum Depth from Wall	Maximum Extension	Weight Capacity	Colors
62 mm	512 mm	2.3 - 11.3 kg	S B

K1W110 SINGLE MONITOR WALL MOUNT

Dynamic mount with single-link arm securely attaches single monitor.

Minimum Depth from Wall	Maximum Extension	Weight Capacity	Colors
62 mm	341 mm	2.3 - 11.3 kg	B

KONTOUR K1 SERIES WALL MOUNT
ACCESSORIES

KRA219	Compatibility
Table Clamp Mount Kit	K1 and K2 Series Mounts*

KRA220	Compatibility
Extension Arm Accessory	K1 and K2 Series Mounts*

KRA223	Compatibility
Dual Monitor Array Bar	K1 and K2 Series Mounts*

KRA224	Compatibility
Dual Monitor Array Bar Handle	K1 and K2 Series Mounts*

FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns

** Compatible with new K1 and K2 models only. Not compatible with discontinued models: K1C100, K1C200, K1C250, K1D100, K1D200, KS100, K1S200, K1W100, K1W200, K1P100, K1P200, K2C100, K2C200, K2P100, K2P200, K2W100 and K2W200.*

KONTOUR™ K2 SERIES WALL MOUNT
FEATURES

CENTRIS® TILT

HEAVY DUTY DESIGN
Features sleek, solidly constructed forged aluminum arms.

FAST INSTALLATION
Tear-drop hole pattern for easy mounting and maintenance.

CENTRIS® TILT
Tilts ±15° for a flexible ergonomic solution.

CABLE MANAGEMENT
Tool-free cable management guide clips for a clean, professional look.

MOUNTING PATTERN
Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

K2W120 SINGLE MONITOR WALL MOUNT

Securely attaches a single monitor to the wall. Features a dual-link arm for added flexibility.

Minimum Depth from Back of Wall	Maximum Extension	Weight Capacity	Colors
75 mm	437 mm	18.14 kg	S B

KONTOUR™ K2 SERIES WALL MOUNT
ACCESSORIES

OFB-xxx	Compatibility
Office Furniture Interface Brackets	K1 and K2 Series Wall Mounts

FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns

OTHER KONTOUR™ WALL MOUNTS

KOW100 PITCH/PIVOT SINGLE WALL MOUNT

Easily attaches a monitor to the wall and provides smooth pivot and tilt adjustment for optimal viewing.

Weight Capacity	Mounting Patterns (W,H)	Tilt	Minimum Depth from Wall	Typical Screen Size	Colors
11.3 kg	75 x 75 mm, 100 x 100 mm	+75°, -10°	81 mm	10 – 30"	S B

KONTOUR™ K4 SERIES WALL MOUNT
FEATURES

MODULARITY
An easily adjustable solution for monitor array workstations where multiple users need to reposition the bank of screens to their preferred viewing distance. Perfect for control rooms, trading desks, call centers, security desks, IT, healthcare and more.

AESTHETIC DESIGN
Form meets function with the K4 Series. Solidly constructed, forged aluminum arms are sleekly designed for a clean appearance.

EXCEPTIONAL FLEXIBILITY
Provides articulating focal depth adjustment, swivel and pan adjustment capability and Centris® Fingertip Tilt for ideal screen positioning. Also includes an integrated handle for quick ergonomic adjustment to fit the user.

MOUNTING PATTERN
Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

K4W310B WALL MOUNTED 3x1 ARRAY

Adjustable wall mount for 3 monitors in a row with one anchor point.

Max. Monitor Width	Extension	Minimum Depth	Arm Rotation	Typical Screen Size	Tilt	Weight Capacity (per monitor)
614 mm	412 mm	239 mm	0 - 20°	up to 24"	±12°	6.8 kg

K4W210B WALL MOUNTED 2x1 ARRAY

Adjustable wall mount for 2 monitors in a row with one anchor point.

Max. Monitor Width	Extension	Minimum Depth	Arm Rotation	Typical Screen Size	Tilt	Weight Capacity (per monitor)
943 mm	412 mm	239 mm	0 - 20°	up to 30"	±12°	6.8 kg

K4W120B WALL MOUNTED 1x2 ARRAY

Adjustable wall mount for 2 monitors arranged vertically with one anchor point.

Max. Monitor Height	Extension	Minimum Depth	Tilt	Weight Capacity (per monitor)
406 mm	412 mm	94 mm	±10°	6.8 kg

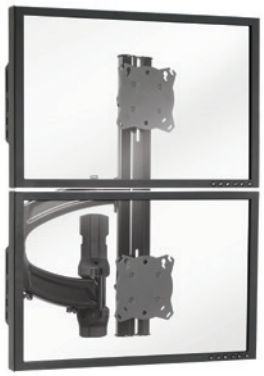

KONTOUR™ K1 SERIES POLE MOUNT

FEATURES

EASY INSTALLATION
Simple 3-step installation and integrated quick-connect interface makes mounting and maintenance easy. Mounts on pre-existing poles with 38 - 48 mm outer diameters.

CENTRIS® EXTREME TILT
Centris® technology provides effortless tilt up to -75/+10°.

MOUNTING PATTERN
Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

HEAVY DUTY DESIGN
Features sleek and solid forged aluminum arms.

ULTIMATE FLEXIBILITY
Gas-spring technology provides smooth dynamic height adjustment up to 330 mm and enables ideal monitor positioning.

CABLE MANAGEMENT
Tool-free cable management covers create a clean, professional look.

K1P220 DUAL MONITOR POLE MOUNT

Dynamic pole mount firmly holds 2 monitors. Flexible dual-link arms provide up to 330 mm of height adjustment.

Minimum Depth from Pole	Extension	Weight Capacity (per monitor)	Colors
62 mm	510 mm	2.3 - 11.3 kg	B

K1P120 SINGLE MONITOR POLE MOUNT

Flexible dual-link arm provides up to 330 mm of height adjustment.

Minimum Depth from Pole	Extension	Weight Capacity	Colors
64 mm	493 mm	2.3 - 11.3 kg	S B

KONTOUR™ K1 SERIES POLE MOUNT
ACCESSORIES

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns

FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

KONTOUR™ K2 SERIES POLE MOUNT

FEATURES

HEAVY DUTY DESIGN
Features sleek, solidly constructed forged aluminum arms.

CENTRIS® TILT
Centris® technology provides effortless tilt up to ±15°.

CABLE MANAGEMENT
Includes tool-free cable management loops for a clean, professional look.

EASY INSTALLATION
Teardrop hole pattern makes mounting the screens quick and easy. Mounts on pre-existing poles with 38 - 48 mm outer diameters.

MOUNTING PATTERN
Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

K2P120 SINGLE MONITOR POLE MOUNT

Pole mount firmly holds a single monitor. Dual-link arm offers added flexibility.

Minimum Depth from Pole	Maximum Extension	Weight Capacity	Colors
74 mm	422 mm	18.14 kg	B

KONTOUR™ K2 SERIES POLE MOUNT
ACCESSORIES

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns

FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

OTHER KONTOUR™ POLE MOUNT

KOP100 SINGLE MONITOR POLE MOUNT

Easily attaches a monitor to a pole and provides smooth pivot and tilt adjustment.

Column Diameter Range	Weight Capacity	Mounting Patterns (W,H)	Tilt	Min.Depth from Pole	Typical Screen Size	Colors
38 – 48 mm	18.14 kg	75 x 75 mm, 100 x 100 mm	+75°, -10°	66 mm	10 – 30"	S B

S1 SERIES
KNOCK DOWN RACKS

NS1F Series 23" OR 28" DEPTHS

Rack rails can be field cut to length to shorten the rack if required by unexpected changes to the installation space. Includes floor levelers, 3U blanking/alignment panels, bottom vent panel and top 3U blanking panels. Casters, doors and side panels ordered separately.

RAXXESS™ S1 SERIES
FEATURES

KNOCK DOWN
The easiest-to-assemble knock down rack on the market.

INSTALLER-FRIENDLY
The rails are self-supported during assembly allowing one person to easily construct the rack in less than five minutes.

EASY-TO-ADD ACCESSORIES
Steel flanged blanking panels at the top are easily removed to accept any two 3U fans or panels.

CABLE MANAGEMENT
The side braces are punched to accept additional rack rails or can be used as a place to land cable ties. Conduit knockouts are laser cut in top and bottom of rack.

S1 SERIES
RACKS

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters
NS1F1223	12 space	584 mm	574 mm	489 mm	724 mm	762 mm
NS1F2023	20 space	584 mm	574 mm		1079 mm	1110 mm
NS1F2823	28 space	584 mm	574 mm		1435 mm	1473 mm
NS1F3628	36 space	711 mm	701 mm		1790 mm	1828 mm
NS1F4128	41 space	711 mm	701 mm		2010 mm	2057 mm

S1 SERIES
ACCESSORIES

S1 Steel Rack Door Options

Model	Rack Height	Type
NS1D12S	12 space	Solid Steel
NS1D20S	20 space	Solid Steel
NS1D28S	28 space	Solid Steel
NS1D36S	36 space	Solid Steel
NS1D41S	41 space	Solid Steel

S1 Perforated Rack Door Options

Model	Rack Height	Type
NS1D12F	12 space	Perforated Steel
NS1D20F	20 space	Perforated Steel
NS1D28F	28 space	Perforated Steel
NS1D36F	36 space	Perforated Steel
NS1D41F	41 space	Perforated Steel

S1 Plexi Rack Door Options

Model	Rack Height	Type
NS1D12P	12 space	Plexi
NS1D20P	20 space	Plexi
NS1D28P	28 space	Plexi
NS1D36P	36 space	Plexi
NS1D41P	41 space	Plexi

S1 Rack Side Panel Pair Options

Model	Rack Height	Rack Depth
NS1S1223	12 space	584 mm
NS1S2023	20 space	584 mm
NS1S2823	28 space	584 mm
NS1S3628	36 space	711 mm
NS1S4128	41 space	711 mm

More universal rack accessories available on page 133.

S2 SERIES
KNOCK DOWN RACKS

NS2F Series 20″ DEPTH

Our most versatile, modular racks, the S2 Series can be stacked to create a tower, arranged side-by-side for a gangable solution, wall mounted or placed in furniture. The solution ships flat and assembles in less than 10 minutes for an ultra-easy install.

RAXXESS™ S2 SERIES
FEATURES

EASY SHIPPING AND ASSEMBLY
Knocks down completely for easy flat pack shipping and can be assembled in less than 10 minutes.

MULTIPLE INSTALL OPTIONS
15U and 20U racks can be stacked for five different height combinations. Standard solution can be standalone with included levelers, wall mounted or hidden in furniture. Caster and on-wall swing-out accessories provide additional install options.

CABLE MANAGEMENT
Rack rail knockouts allow for easy zip-tie cable management.

HEAVY DUTY
Welded frame provides strong support for equipment, holding up to 600 lbs (272 kg) on the floor or 200 lbs (90 kg) on wall.

EASY-TO-ADD ACCESSORIES
Compatible with all standard Chief rack accessories.

S2 SERIES
RACKS

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters
NS2F1520	15 space	508 mm	485 mm	519 mm	667 mm	723 mm
NS2F2020	20 space	508 mm			519 mm	945 mm

S2 SERIES
ACCESSORIES

NS2SK	Compatibility
On-wall Swing-out Mount	NS2 Series

NAC20M	Compatibility
2.0 Medium Duty Rack Caster	NS2 Series

More universal rack accessories available on page 142.

G1 SERIES
GANGABLE RACKS

NG1F Series 33" DEPTH

Rear rack rail is included for easy cable management. Floor levelers, casters, front and rear doors and side panels ordered separately.

RAXXESS™ G1 SERIES
FEATURES

HASSLE-FREE
Pre-welded ganging nuts and included hardware provide the ability to gang racks after components are loaded.

SMART PACKAGING
Packaged with padding that stays on the rear of the rack after other packaging is removed so the rack can be safely laid on the floor to load heavy components.

EASY-TO-ADD ACCESSORIES
Steel flanged blanking panels at the top are easily removed to accept any two 3U fans or panels.

G1 SERIES
RACKS

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters
NG1F2833	28 space	838 mm	749 mm	522 mm	1422 mm	1458 mm
NG1F3633	36 space				1778 mm	1814 mm
NG1F4433	44 space				2134 mm	2169 mm

G1 SERIES
ACCESSORIES

G1 Steel Rack Door (front or rear) Options

Model	Rack Height	Type
NG1D28S	28 space	Solid Steel
NG1D36S	36 space	Solid Steel
NG1D44S	44 space	Solid Steel

G1 Perforated Steel Rack Door (front or rear) Options

Model	Rack Height	Type
NG1D28F	28 space	Perforated Steel
NG1D36F	36 space	Perforated Steel
NG1D44F	44 space	Perforated Steel

G1 Plexi Rack Door (front or rear) Options

Model	Rack Height	Type
NG1D28P	28 space	Plexi
NG1D36P	36 space	Plexi
NG1D44P	44 space	Plexi

G1 Steel Rack Side Panel Pair Options

Model	Rack Height	Rack Depth
NG1S2833	28 space	838 mm
NG1S3633	36 space	838 mm
NG1S4433	44 space	838 mm

More universal rack accessories available on page 142.

E1 SERIES
ENCLOSED RACKS

NE1F Series 23″ OR 28″ DEPTHS

Covered vented bottom panel provides additional space for mounting components, for cable entry or a filtered fan intake panel for cooling components. Shown with optional floor levelers and casters installed. Floor levelers, casters and doors ordered separately.

RAXXESS™ E1 SERIES
FEATURES

CUSTOMIZABLE
Adjustable depth front and rear rack rails along with seal-able vent openings to quickly create the rack you need.

SMART PACKAGING
Packaged with padding that stays on the rear of the rack after other packaging is removed so the rack can be safely laid on the floor to load heavy components.

EASY-TO-ADD ACCESSORIES
Steel flanged blanking panels at the top are easily removed to accept any two 3U fans or panels.

E1 SERIES
RACKS

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters
NE1F2023	20 space	584 mm	514 mm	597 mm	1066 mm	1100 mm
NE1F2028	20 space	711 mm	641 mm		1066 mm	1100 mm
NE1F2823	28 space	584 mm	514 mm		1419 mm	1457 mm
NE1F2828	28 space	711 mm	641 mm		1419 mm	1457 mm
NE1F3623	36 space	584 mm	514 mm		1775 mm	1811 mm
NE1F3628	36 space	711 mm	641 mm		1775 mm	1811 mm
NE1F4423	44 space	584 mm	514 mm		2130 mm	2166 mm
NE1F4428	44 space	711 mm	641 mm		2130 mm	2166 mm

E1 SERIES
ACCESSORIES

E1 Steel Rack Door (front or rear) Options

Model	Rack Height	Type
NE1D20S	20 space	Solid Steel
NE1D28S	28 space	Solid Steel
NE1D36S	36 space	Solid Steel
NE1D44S	44 space	Solid Steel

E1 Perforated Steel Rack Door (front or rear) Options

Model	Rack Height	Type
NE1D20F	20 space	Perforated Steel
NE1D28F	28 space	Perforated Steel
NE1D36F	36 space	Perforated Steel
NE1D44F	44 space	Perforated Steel

E1 Plexi Rack Door (front or rear) Options

Model	Rack Height	Type
NE1D20P	20 space	Plexi
NE1D28P	28 space	Plexi
NE1D36P	36 space	Plexi
NE1D44P	44 space	Plexi

More universal rack accessories available on page 142.

RAXXESS™ F1 SERIES
FEATURES

FULLY ASSEMBLED RACK
Ships with large 101 mm lockable casters that can be installed for easy maneuverability. Reversible swing front and rear doors add flexibility.

SLEEK AESTHETICS
Great solution for boardrooms and video conferencing with several available finishes (Black and Maple).

THERMAL MANAGEMENT
Two steel flanged blanking panels in the rear door are easily removed to accept any 3U fans or panels.

YF1F Series 30" DEPTH

Steel frame core for strength, stability and to prevent caster tear-outs.

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters	Finish
YF1F1228B	12 space	762 mm	642 mm	677 mm	754 mm	863 mm	B
YF1F1228M							M
YF1F2028B	20 space				1110 mm	1219 mm	B

ROTATING & PULL-OUT RACKS

RAXXESS™ ROTATING & PULL-OUT RACK
FEATURES

HEAVY DUTY DESIGN
Rated to carry up to 136 kg of equipment. HD models allow for greater weight capacity.

ACCESSIBLE
Pull out racks provide easy access to equipment and wiring when space is at a premium.

CABLE MANAGEMENT
Included cable management system keeps wiring organized when the rack is pulled out for service.

SAFETY
Bottom cover panel keeps the rack from being pulled out accidentally.

ROTR PULL-OUT ROTATING RACK WITH 480 MM DEPTH

In-wall pull out rotating rack. Designed for flush cabinet door installations. Assembly required.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width
ROTR-12	12 space	622 mm	480 mm	467 mm	489 mm
ROTR-24	24 space	1156 mm			

ROTR-XL PULL-OUT ROTATING RACK WITH 582 MM DEPTH

In-wall pull out rotating rack. Designed for recessed cabinet door installations. Assembly required.

Model	Rack Height	Height	Overal Depth	Usable Depth	Width
ROTR-XL-12	12 space	622 mm	582 mm	467 mm	489 mm
ROTR-XL-24	24 space	1156 mm			

ROTR-HD 24U+ PULL-OUT ROTATING RACK WITH 597 MM DEPTH

In-wall pull out rack. Designed for heavy duty rack installations. Assembly required.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width	Min Sill Height*
ROTR-HD-24	24 space	1229 mm	597 mm	470 mm	489 mm	102 mm
ROTR-HD-44	44 space	2118 mm				

** Adjustable to 152 mm with included hardware.*

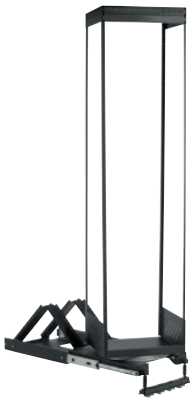

POTR & POTR-XL PULL-OUT RACK

In-wall pull out rack. Required installation depth of 479 mm for POTR and 580 mm for POTR-XL. Assembly required.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width	Extension
POTR-12	12 space	598 mm	480 mm	467 mm	489 mm	475 mm
POTR-XL-12			582 mm	533 mm		551 mm
POTR-24	24 space	1132 mm	480 mm	467 mm		475 mm
POTR-XL-24			582 mm	533 mm		551 mm

ROTATING & PULL-OUT RACK ACCESSORIES

ROTRS	Compatibility
Racks Component Shelf	POTR, POTR-XL, ROTR and ROTR-XL

More universal rack accessories available on page 133.

RAXXESS™ ON-WALL RACK
FEATURES

EASY INSTALLATION
Enclosed wall-mounted racks come with horizontal keyhole slots to make hanging the back panel simple.

INCLUDED HARDWARE
Racks ship with all required hardware to mount to wood studs, steel studs or concrete.

W2 Series FIXED WALL RACKS

This fixed wall rack includes a reversible locking front door and a ventilated bottom panel. Steel flanged blanking panel at the top is easily removed to accept any 3U fan or panel. Weight capacity is 68 kg.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width
NW2F818	8 space	468 mm	460 mm	420 mm	562 mm
NW2F1218	12 space	646 mm			

RAXXESS™ FREESTANDING RACK
FEATURES

BACK TO BASICS
Clean, efficient rack design for audio and video gear.

INSTALLER FRIENDLY
Ships knocked down to assemble in minutes.

ER ECONOMY RACKS

An economical rack available in heights from 4 space to 20 space and 403 mm or 454 mm depths. Weight capacity is 68 kg.

Model	Rack Height	Height	Overall Depth	Usable Depth	Overall Width
ER-4	4 space	219 mm	403 mm	381 mm	772 mm
ER-6	6 space	308 mm			
ER-8	8 space	397 mm			
ER-10	10 space	486 mm			
ER-12	12 space	574 mm			
ER-14	14 space	664 mm			
ER-16	16 space	753 mm			
ER-20	20 space	930 mm			
ER-8-18	8 space	397 mm	454 mm	431 mm	
ER-16-18	16 space	753 mm			

ERK ELITE RACKS

Sectional design allows access to rear of rack for cabling and maintenance. Doors can be hinged to open in either direction. Weight capacity is 68 kg. All racks over 8 space include casters.

Model	Rack Height	Height	Height w/ Casters	Overall Depth	Usable Depth	Overall Width	Color
ERK-4-16B	4 space	229 mm	302 mm	406 mm	356 mm	772 mm	B
ERK-8-20B	8 space	429 mm	502 mm	508 mm	457 mm		B
ERK-12-20B	12 space	606 mm	680 mm				B
ERK-16-20B	16 space	784 mm	857 mm				B

FREESTANDING RACK
ACCESSORIES

ER Plexi Economy Rack Door Options		
Model	Non Slanted Rack Height	Type
ERD-8	8 space	Plexi
ERD-12	12 space	Plexi
ERD-16	16 space	Plexi
ERD-20	20 space	Plexi

ERK Rack Front Door Options		
Model	Rack Height	Type
ERKD-8	8 space	Plexi
ERKD-12	12 space	Plexi
ERKD-16	16 space	Plexi
ERKD-20	20 space	Plexi

ERK Rack Rear Door Options		
Model	Rack Height	Color
ERKD-8BR	8 space	B
ERKD-12BR	12 space	B
ERKD-16BR	16 space	B
ERKD-20BR	20 space	B

CASTER-ER/ERK	Compatibility
Casters	ER Racks, ERS Racks and ERK-4 and ERK-8

OTHER RAXXESS™ RACK ACCESSORIES

NACS Custom Mounting Shelves

Model	Rack Height	Depth
NACS214*	2 space	355 mm
NACS218	2 space	457 mm
NACS314**	3 space	355 mm
NACS418	4 space	457 mm
NACS518	5 space	457 mm

NACF Custom Faceplates

Combine NACS custom mounting shelf with NACF custom faceplate. Visit milestone.com for complete list of custom faceplate options.

** Popular components include Apple TV Gen3, Dual, Triple, and Sonos Connect Single, Dual, Triple.*

*** Popular components include Sonos Connect AMP Single and Dual.*

CMK-CBS Component Clamping Bars for Custom Mounting Shelves

Works with NACS selves to secure products in place. Includes soft foam protective strips.

UNS-1	Rack Height	Depth
Universal Rack Shelf	1 space	254 mm

UTS Utility Shelf

Model	Rack Height	Depth
UTS-1	1 space	279 mm
UTS-2	2 space	368 mm
UTS-3	3 space	368 mm
UTS-4	4 space	368 mm

UTVS-3-18	Rack Height	Depth
Vented Shelf	3 space	457 mm

TR Trap Shelf

Model	Rack Height	Depth
TR-2	2 space	368 mm
TR-3	3 space	368 mm

ATS-16-26	Rack Height	Depth
Adjustable Telescoping Shelf	1 space	406 - 606 mm

EXS Extendable Shelf

Model	Usable Depth	Weight Capacity
EXS-2	533 - 711 mm	45.4 kg

SLS-1.5	Rack Height	Depth
Sliding Shelf	2 space	368 mm

AFG Aluminum Flanged Panel

Model	Rack Height	Type
AFG-1	1 space	Black Anodized Aluminum
AFG-2	2 space	Black Anodized Aluminum
AFG-3	3 space	Black Anodized Aluminum
AFG-4	4 space	Black Anodized Aluminum

AFT Aluminum Flat Panel

Model	Rack Height	Type
AFT-1	1 space	Black Anodized Aluminum
AFT-2	2 space	Black Anodized Aluminum

EFG Economy Steel Flanged Panel

Model	Rack Height	Type
EFG-1	1 space	Black Powder Coat
EFG-2	2 space	Black Powder Coat
EFG-3	3 space	Black Powder Coat
EFG-4	4 space	Black Powder Coat

OTHER RAXXESS™ RACK ACCESSORIES

SFG Steel Flanged Panel		
Model	Rack Height	Type
SFG-1	1 space	Black Wrinkle Coat
SFG-2	2 space	Black Wrinkle Coat
SFG-3	3 space	Black Wrinkle Coat
SFG-4	4 space	Black Wrinkle Coat

FVP Fine Perforated Vent Panel		
Model	Rack Height	Type
FVP-1	1 space	Black Powder Coat

PVP Perforated Vent Panel		
Model	Rack Height	Type
PVP-1	1 space	Black Powder Coat
PVP-2	2 space	Black Powder Coat
PVP-3	3 space	Black Powder Coat
PVP-4	4 space	Black Powder Coat

LSC Locking Security Cover		
Model	Rack Height	Type
LSC-4	4 space	Solid Steel

SEC Perforated Security Cover		
Model	Rack Height	Type
SEC-1	1 space	Black Powder Coat
SEC-2	2 space	Black Powder Coat
SEC-3	3 space	Black Powder Coat

SDR Sliding Drawer Options		
Model	Rack Height	Type
SDR-2-L	2 space	Locking
SDR-3-L	3 space	Locking
SDR-4-L	4 space	Locking

FL	Compatiblity
Floor Levelers	Compatibility E1, G1, (S1 ships with floor levelers)

NAC25H	Compatiblity
Heavy Duty Casters	E1, G1, S1

PTSW-(X)	
Rack Screws	
Model	Quantity
PTSW25	Package of 25
PTSW50	Package of 50
PTSW100	Package of 100
PTSW500	Reuseable bucket of 500

PNTX-(X)	Compatiblity
Security Screws	All Racks
Model	Quantity
PNTX-25	Package of 25, includes one security bit
PNTX-50	Package of 50, includes one security bit
PNTX-100	Package of 100, includes one security bit
PNTX-B	Extra Security Screw Bit

NALRBW	Compatiblity
Rack Light	Included 12VDC power supply accepts 120/240 and 50/60Hz

OTHER RAXXESS™ RACK ACCESSORIES

TB	
Horizontal tie bars for organizing cables	
Model	Description
TBA	25 mm Wide Aluminum
TBL	13 mm L-Shaped
TBLO	102 mm Offset L-Shaped
TBS	6 mm Round Rod
TBO	102 mm Offset Round Rod

LCS Cable Lacing Strips		
Vertical lacing strips can be field cut to size		
Model	Width	Length
LCS	50.8 mm	1960 mm
LCS-1	24.4 mm	1960 mm

NAG Brush Grommet	
Model	Rack Height
NAG1BW	1 space
NAG2BW	2 space

CT	
Nylon zip ties in packs of 100	
Model	Length
CT-100-4	102 mm
CT-100-8	203 mm
CT-100-12	305 mm
CT-100-15	381 mm
CT-100-8R	203 mm reusable

CMP-1C	Rack Height
Large Loop Cable Management Panel	1 space

CMP-1M	Rack Height
Small Loop Cable Management Panel	1 space

NAF15BA	Rack Height	Description	Type
Fan Panel	1U	Intake fan panel for front rail installation	Quiet

NAFT85	Description
Thermostat Control	Turns on at 29° C off at 24° C. Includes universal power supply to run two fans.

NAFB2BW	Description	Compatibility
Filtered Fan Panel	Draws cool filtered air into rack from bottom	E1, F1, G1, S1 racks

NAV8B	Quantity	Compatibility
Vent Block Kit	8	E1, W1, W2

NAF Exhaust Fan Panel - Black Anodized			
Model	Rack Height	Fans	Type
NAF31QBA	3 space	1	Quiet
NAF32QBA	3 space	2	Quiet
NAF33QBA	3 space	3	Quiet

NAM1F	Rack Height	Mounting Patterns (W,H)	Weight Capacity
Fixed Rack Monitor Mount	4 space rack mount*	75 x 75 mm to 200 x 100 mm	18 kg

OTHER RAXXESS™ RACK ACCESSORIES

NAM1T	Rack Height	Mounting Patterns (W,H)	Weight Capacity
Tilt Rack Monitor Mount	4 space rack mount*	75 x 75 mm to 100 x 100 mm	18 kg

NAM1A	Rack Height	Mounting Patterns (W,H)	Weight Capacity
Articulating Rack Monitor Mount	4 space rack mount*	75 x 75 mm to 100 x 100 mm	18 kg

** May require more than 4 spaces depending on size of monitor used.*

Pull-Out iPod® Docks		
Includes iPod Dock, Multi-Function Remote Control, 120V/240V Power Supply, Zip Ties, Audio, Video and USB Cables		
Model	**Rack Height**	**Color**
NAID1B	1 space	B
NAID4B	4 space	B

NADBW	Size
Document Holder	Holds documents up to 216 x 279 mm

INDEX
2016 EMEA CATALOG

A

AFG 142

AFT 142

ATS-16-26 142

C

CASTER-ER 141

CASTER-ERK 141

CM2C40UI 79

CM2L40UI 95

CMA110 25

CMA274 24, 78

CMA275 78

CMA330 24

CMA345 24

CMA347 24

CMA351 25

CMA395 24

CMA640 25

CMA643 25

CMK-CBS 142

CMP-1C 144

CMP-1M 144

CMS003 25

CMS006 25

CMS009 25

CMS012 25

CMS018 25

CMS024 25

CMS036 25

CMS048 25

CMS060 25

CMS072 25

CMS115 24

CMS0203 25

CMS0305 25

CMS0406 25

CMS440 25

CMS491 27

CMS491C 27

CMS492 27

CMS492C 27

CMS0507 25

CMS006009 25

CMS009012 25

CMS012018 25

CMS018024 25

CMS Adjustable Columns 25

CMS Fixed Columns 25

CMSZ006 25

CPA116 24

CPA262 78

CPA262S 78

CPA263 24, 78

CPA264 24, 78

CPA330 24, 78

CPA365 24, 78

CPA395 24, 78

CPA640 24

CPA Columns 78

CPAE 24

CPAE030 24, 78

CPAE080 24, 78

CPAE100 24, 78

CPAE150 24, 78

CPAE300 24, 78

CT 144

E

E1 133

EFG 142

ER 140

ERD 141

ERK 140

ERKD 141

EXS-2 142

F

FCA2X1U 88

FCA3U 76

FCA3X1U 88

FCA4U 76

FCA102 59, 47

FCA103 40

FCA106 40, 47, 56

FCA510 76, 88, 93

FCA510/515 88

FCA515 88, 87, 89, 76, 93

FCA520 88, 87, 90, 76, 93

FCA535 88

FCA611 93

FCA612 93

FCA623 , 93

FCA650 93

FCA651 93

FCA776 89

FCA800 , 88, 76, 93, 47, 40, 86, 88, 93

FCA800V 92

FCA810V

FCA820V 39, 46, 92

FCA800V/810V/820V 92

FCA800VE 92

FCA810VE

FCA820VE 39, 46, 92

FCA800VE/810VE/820VE 92

FCA801 , 88, 93, 76, 47, 40, 86, 88, 93

FCA802 76, 88, 93

FCA810 , 88, 76, 47, 40, 88, 93

FCA810V 92

FCA810VE 92

FCA811 , 88, 76, 47, 40, 88, 93

FCA812 76, 88, 93

FCA820 , 88, 76, 40, 88, 76, 93

FCA820V 92

FCA820VE 92

FCA821 , 88, 93, 76, 47, 40, 86, 88, 76

FCA830 , 89, 77, 47, 40, 87, 89, 91, 93

FCA831 , 89, 77, 47, 40, 87, 89, 91, 94

FCA840 , 89, 77, 47, 40, 87, 89, 91, 93

FCA841 , 89, 77, 40, 87, 89, 91, 94

FCABX18 88

FCABX36 88

FCAC , 76

FCACLIPS 77, 89, 94

FCAX08 88, 53, 76

FCAX08/14/20 76

FCAX14 88, 53, 76

FCAX20 88, 53, 76

FCK000 40, 47

FCK008 40, 47

FCK016 40, 47

FL 143

FSB4041 104, 107, 111, 118, 120, 124, 126

FSB4073 104, 107, 111, 118, 120, 124, 126

FSB4090B 107

FSBV 104, 107, 111, 115, 118, 120, 124, 126

FSRV 42

FTRV 49

FVP 143

H

HC1 26

I

IR10 30, 81

J

JPPU 80

K

K0P100 126
K0P100B 80
K0W100 120
K1C22H 101
K1C110 102
K1C120 101
K1C210 101
K1C220 101
K1D22H 102
K1D120 103
K1D130 103
K1D220 102
K1D230 102
K1P120 123
K1P220 123
K1W120 117
K1W220 117
K2C22H 105, 106
K2C120 106
K2C220 105
K2P120 125
K2W120 119
K3F120B 110
K3F220B 109
K3F310B 110
K3G120B 110
K3G220B 109
K3G310B 110
K3G320B 109
K4G120B 113
K4G210B 113
K4G310B 113
K4G320B 114
K4G410B 113
K4G420B 114
K4G510B 112
K4G520B 114
K4G610B 112
K4G620B 114
K4W120B 122
K4W210B 121
K4W310B 121
KFA220 98
KFA225 98
KFA320 98
KFA325 98
KITEC030045 19
KITEC045080 19
KITEC080135 19
KITMZ006S 6, 23
KRA219 104, 107, 118
KRA220 104, 107, 118
KRA221 107
KRA223 104, 107, 118
KRA224 104, 107, 118
KRA225 104, 107
KRA234 104, 107
KRA300 104
KRA500 111
KSA1250 111, 115
KSA1250B 104, 107

L

LBM1x2U 86
LBM1x2UP 86
LBM1x3U 85
LBM2x2U , 85, 86
LBM2x2UP , 86
LBM3x1UP 84, 85, 87
LBM3x2U 84
LBM3x2UP 84
LBM3x3U 83
LC1 26
LCB1U 73
LCB1UP 73
LCB1x2U 74
LCB2x1U 70
LCB2x1UP 70
LCB3x1U 69
LCB3x1UP 69
LCD2C 26
LCD2TS 26
LCDCP 26
LCDPA 26
LCM1U 72
LCM1UP 73
LCM1x2U 74
LCM2x1U 69
LCM2x1UP 70
LCM2x2U 67
LCM2x2UP 67
LCM3U 74
LCM3x1U 68
LCM3x1UP 68
LCM3x2U 66
LCM3x2UP 66
LCM3x3U 66
LCM4U 74
LCS 144
LFAU 91
LPAU , 91
LSA1U 37
LSC-4 143
LSM1U 37
LSMVPU 57
LSMVU 57
LSTU 41
LTA1U 44
LTM1U 44
LTTU 48
LVM2x2U , 85, 86
LVM2x2UP , 85, 86
LVM3x1UP 84
LVM3x2U 83
LVM3x2UP 83
LVM3x3U 83
LVS1U , 55
LVS1UP 55
LVSXU 55
LVSXUP 55

M

MAC722 98
MCB1U 75
MCB1x2U 75
MCM1U 75
MCM1x2U 75
MF1U 97
MFAU 91
MFCU 96
MPAU 91
MSA1U 38
MSM1U 38
MSMVPU 58
MSMVU 58
MSTU 41
MTA1U 45
MTM1U 45
MTMP1U 45
MTTU 48
MWCU 49

N

NAC20M 130
NAC25H 143
NACF 142
NACS 142
NADBW 145
NAF 144
NAF15BA 144
NAFB2BW 144
NAFT85 144
NAG 144
NAID1B 145
NAID4B 145
NALRBW 143
NAM1A 145
NAM1F 144
NAM1T 145
NAV8B 144
NE1D 134
NE1F 134
NG1D 132
NG1F 131, 132
NG1S 132
NS1D 128
NS1F 127, 128
NS1S 128
NS2F 130
NS2SK 130
NW2F 139

O

OFB-xxx 120

P

PAC101 42
PAC102 81
PAC103 42
PAC400 , 64
PAC710 98
PAC715 64, 81, 98
PAC715/716 81, 98
PAC716 64, 81, 98
PAC722 98
PAC730A 98
PACCS1 64
PACTP1 98
PDRUB 64
PF1U 96
PFCU 96
PG1A 26
PG2A 26
PG3A 26
PNRUB 64
PNTX 143
POTR 137
POTR-XL 137
PSMH 42
PTSU 99
PTSW 143
PVP 143

R

ROTR 137
ROTR-HD 137
ROTRS 138
ROTR-XL 137
RPEU 21
RPMEU 20
RSEU 21
RSMEU 20

S

S2 129, 130
SEC 143
SEC2 26
SFG 143
SL151i 29
SL220 29
SL236i 29
SLS-1.5 142
STLU 99
STS1 99
SYSAU 22

T

TA100 63
TA200 63
TA250 63
TA300 63
TA350 63
TA410 63
TB 144
TPMU 80
TPSU 80
TR 142
TS110SU 62
TS118SU 62
TS218SU 62
TS318SU 61
TS318TU 61
TS325TU 61
TS525TU 61

U

UNS-1 142
UTS-1 142
UTS-2 142
UTS-3 142
UTS-4 142
UTVS-3-18 142

V

VCMEU 23
ViewShare 39, 46, 92

W

WM110AUS 33
WM120AUS 33
WM130AUS 33
WM210AUS 32
WM220AUS 32
WM230AUS 32
WMA1S 35
WMA2S 35
WP21US 34
WP22US 34
WP23US 34

X

XBM1U 86
XBM1UP 87
XCB1U 72
XCB7000 71
XCM1U 72
XCM7000 71
XPAU 90
XSM1U 37
XTM1U 44
XVAU , 90

Y

YF1F 135

TERMS & CONDITIONS

PRICES: Prices are subject to change without notice. Orders are priced at the pricing in effect on the date your purchase order was received. To guarantee pricing for a specific period, customer must obtain a written quotation from Chief. Chief only sells directly to authorized Chief dealers and distributors. Possession of said price book does not constitute an offer to sell.

TERMS AND CONDITIONS: All accounts are due and payable in funds according to the terms of the invoice.

ORDERING: Because of the specific nature of our products and our commitment to entering and shipping orders accurately, we prefer that orders be placed in writing via a purchase order and sent to us via fax (+31 495 580 845) or via e-mail (emea.sales@milestone.com). In urgent situations, we will make every effort to take accurate orders verbally when requested by the customer. Chief cannot guarantee that verbal miscommunication errors will result in the purchaser's favor.

ORDER CONFIRMATION: Customers will receive an e-mail confirmation of their order within 5 hours of receipt of purchase order or at end working day max. within 24 hours. If you do not receive a confirmation of your order, please contact us as it is possible we did not receive your original order. Please review the confirmation to ensure Chief has recorded the details of the transaction as you expected and notify Chief of any discrepancies immediately.

CHANGES TO ORDERS: Because expedited orders begin the production and shipping fulfillment process immediately upon receipt and entry of purchase order, it is frequently not possible to change orders. Other orders will be changed as possible. Contact Customer Service at +31 495 580 840 and they will work through an alternative solution with you. In all cases, the customer is responsible for incremental charges incurred because of the change.

SPECIAL ORDERS: Some of Chief's products can be customized to fit your specific applications. Contact Inside Sales for additional information and pricing. Orders for large quantities of products may also be considered a special order. Any special order or custom product not normally carried in inventory cannot be returned. All electrical products and products with quote pricing are treated as special order items.

PRODUCT CHANGES/DISCONTINUED PRODUCTS: Chief is constantly developing new products and making improvements to existing ones; therefore, we reserve the right to revise or change specifications, designs and model numbers and to discontinue models without notice.

PACKAGING: Where possible and practical, Chief will bulk-pack the items on your order. Please keep in mind that the dimensions and weight of some of our products may preclude bulk-packing. We are not responsible for air-freight or other charges due to multiple single package shipments.

DELIVERY: All promises of delivery are made in good faith and every reasonable effort is made to see that delivery schedules are met. However, if Chief is unable to meet a schedule due to factors beyond our control such as, but not limited to, failure of our suppliers to meet their promised dates or weather related delivery delays, Chief will not be responsible for significant or specific damage. Significant or specific damages may be, but are not limited to, express shipping method charges or installation delay charges. Contact the Chief Inside Sales team for assistance with freight estimates specific to your needs. Delivered prices do not include any type of extraordinary charges such as lift gate requirements, inside delivery charges, residential charges or other nonstandard charges.

FREIGHT AND FREIGHT DAMAGE: Depending on the Inco-term. It is the customer's responsibility to immediately open and inspect all packages and, in the event there is any damage or shortages, file a claim with the freight company. Please contact Chief Customer Service at +31 495 580 840 to get contact information about the specific freight company used and to discuss receiving a replacement product. Keep the damaged product in its original packaging and carton. Unless concealed damage is reported to the Carrier and Chief immediately, there is no recourse. The customer will be charged for any replacement product as the eventual credit will come directly from the carrier via the claim filed.

RETURNS AUTHORIZATION: All merchandise returned to Chief must be returned with prior authorization and a Return Authorization number provided by Customer Service. Chief will provide Return Authorization only for those products purchased directly from Chief. Consumers or dealers purchasing through a third party must request returns through that third party and are subject to that entity's return policies and charges. Defective or product received incorrectly due to an error on Chief's part will be credited to your account in full. In situations where the dealer needs to return merchandise due to a change in its project/equipment or due to ordering incorrectly, a restock charge will apply as follows. Returns are not allowed for merchandise over 90 days old; electrical lift products; special order products, or discontinued merchandise. Products returned that are damaged or missing parts will not be eligible for credit unless they can easily be made saleable. Additional charges for parts and labor may apply.

LIMITED WARRANTY: With the exception of electrical products, Chief warrants its products to be free of defects in material and workmanship for 10

years. All warranties are in effect beginning the date the product was invoiced by Chief. Electrical mechanisms (such as lift products) have a 1-year limited warranty. All warranties are in effect for the original purchaser only. Chief disclaims liability for any modifications, improper installation and/or installations over the specified weight capacity. Chief also disclaims liability for any modifications made to electrical mechanisms, improper installation, incorrect voltage connection and/or installations over the stated weight capacity. All Electrical Mechanisms are intended for indoor use only and failure to comply will void warranty. Chief's sole warranty obligation to the owner of its products is to repair or replace (at Chief's discretion) defective products at no charge to the original purchaser within the warranty period. The purchaser is responsible for returning the product to Chief via prepaid shipping. To the maximum extent permitted by applicable law, Chief disclaims any other warranties, express or implied, including warranties of fitness for a particular purpose and warranties of merchantability. Chief will not be liable for any damages whatsoever arising out of the use or inability to use Chief products, even if Chief has been advised of the possibility of such damages. Chief bears no responsibility for incidental or consequential damages. This includes, but is not limited to, any labor charges for the repair of Chief products performed by someone other than a Chief employee. Because some states and jurisdictions do not allow the exclusion or limitation of liability for consequential or incidental damages, the above limitation may not apply. Chief will not be responsible for damage to Chief products caused by misuse, abuse, failure to properly package the product for return to Chief or for damage caused by carriers during shipment to or from Chief. Any repairs to Chief products required due to misuse, abuse or shipping damage or repairs of defective Chief product outside the warranty period will be performed at the current rates established by Chief for factory service.

CHIEF

A BRAND OF MILESTONE AV TECHNOLOGIES | www.milestone.com

USA **P** 866.977.3901 **E** chief@chiefmfg.com
CANADA **P** 877.345.4329 **E** canadainfo@milestone.com
EMEA **P** +31 495 580 840 **E** emea.sales@milestone.com
APAC **P** +852 2145 4099 **E** asia.chief@milestone.com

In British Columbia, Milestone AV Technologies ULC carries on business as MAVT Milestone AV Technologies ULC.

©2016 Milestone AV Technologies. 150186 11/15 Chief is a registered trademark of Milestone AV Technologies. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

milestone

Milestone AV Technologies is home of Chief, Da-Lite, Sanus and Projecta. Across these brands, Milestone produces a wide range of innovative audiovisual solutions.