



PROFESSIONAL AV SOLUTIONS  
2016 EMEA Catalog



# A MESSAGE FROM CHIEF

We've had another exciting year at Milestone! With our focus on giving you the best experience possible with our products and services, we've added many new items to the catalog as well as exciting new features and functionality online. These new enhancements are based solely on your feedback!

For the last few years, we've interviewed hundreds of AV people from around the world to find out what "being easy to work with" means for them. We were looking to find that next level of service we could provide to make your life easier. We talked to internal and external teams, managers, installers, dealers, purchasers and more in order to find out what we were doing well and what we could do better. The common response was: "Keep doing what you're doing, just do it better!"

A major theme that kept appearing in these interviews was the desire for one consistent experience across Milestone commercial brands, especially the ones you deal with most often like Chief and Da-lite in the U.S. and Projecta in Europe. This means one account, one invoice, and one website for all your information. You wanted to access your account online, including pricing, order tracking and product availability. You wanted automated order status, confirmations via email and quick-turn quotes. And you couldn't have been more right! We understand that you want the same conveniences at work as you do while shopping personally online. And now we're thrilled to bring it to you.

Last May, we launched the new Milestone website experience in North America. And we are happy to announce the expansion of that site to Europe & South America with language options in English, French, Dutch, German, Spanish and Russian. Our customers in Asia will now have all the online searching capabilities, but specific log-in features are yet to come.

Chief, Projecta and Da-Lite are now at milestone.com – a new digital experience with new functionality developed specifically to make life easier for you. Features include enhanced browsing with search and filtering options, product comparisons, drawings, photos, case studies and videos.

Your online Milestone account gives you access to many exclusive features including access to pricing, order status and much more.


If you haven't already done so, head to milestone.com and look around. Other features include enhanced browsing with search and filtering options, product comparisons, drawings, photos, case studies and videos! And as always, continue to give us feedback so we can make it better. There's a feedback button located at the top of the screen.

We're extremely excited to roll out this enhanced digital experience and feel it's one giant step forward to being the easiest partner to do business with in AV.



**Laurie Englert**

Vice President - Customer Experience



## A *better* DIGITAL EXPERIENCE

We've been asking customers how we could be a better partner. The resounding answer? Make it easy. No problem!

You can now find all the Milestone AV Technologies brands in one place and get instant access to:

- Online pricing
- Simple purchase process
- Inventory and lead time information
- Freight information
- Order status
- Easy returns
- Purchase and project history
- Translated content in English, French, German, Dutch, Spanish and Russian

Get connected today at Milestone.com.





# CONNECTING LEADING BRANDS YOUR FULL SERVICE AV PARTNER

Milestone AV Technologies is a leading designer and manufacturer of branded audiovisual products including flat panel mounting solutions, projector mounts, projection screens, equipment racks and furniture for AV markets. Milestone's innovative products are sold in the commercial markets under the Chief, Da-Lite and Projecta brand names, and in the consumer markets under the Sanus brand name. All brands work together to provide a breadth of product, strength of longevity, and advantage of superior customer service and support.

## milestone™ AV Technologies

### OUR COMMERCIAL BRANDS

#### **CHIEF®**

Chief focuses on commercial AV flat panel and projector mounts. Home Theater, Workstation and Custom Display Solutions are also part of the Chief product offering. Known in the industry for high quality mounts with both Custom and Universal options, as well as an extensive accessories line, Chief is focused on professional installers worldwide.

#### **DA-LITE®**

For over 100 years, Da-Lite has been designing, manufacturing and marketing the most comprehensive line of projection screens in the world. Today, we offer our widest selection ever of proprietary projection screen fabrics and materials in our history.

#### **PROJECTA™**

As Europe's leading manufacturer of projection screens, Projecta offers top quality products, intelligent mounting systems and, of course, excellent dealer support. Projecta's strength lies in their primary focus on development and production, allowing them to offer advanced and durable projection screens and furniture to the market.



# INCREASE *your* KNOWLEDGE

with the Chief Certified Partner Program



In 2015 we conducted an extensive survey requesting feedback from the 6,000+ users of our Certified Partners Program. One question asked what is the best part of the program. The overwhelming response: increased Chief product knowledge.

Time after time, we heard how Certification was an easy, engaging way to learn more about Chief solutions, discover installation tips and tricks, and grow as an AV professional. This was great to hear and exactly what we hoped to accomplish with our training!

In addition to product knowledge, the program delivers free industry credits from InfoComm, CEDIA and the Digital Signage Experts Group (DSEG). We also send welcome gifts at 200 Chief points and Visa gift cards at 600 and 1,200 points.

Discover all the benefits and rewards at [milestone.com/certification](http://milestone.com/certification) and start training today!



## AWARDS

### CONNEXSYS VIDEO WALL MOUNTING SYSTEM

- InAVation Award – InAVation Magazine – 2015
- Excellence in Product Innovation Awards, Installer Friendly Category – NCSA and Commercial Integrator – 2015
- Excellence in Product Innovation Awards, Most Innovative Product – NCSA and Commercial Integrator – 2015
- Most Innovative Mounting Solution – SCN/InfoComm Installation Product Awards – 2015

### ALL-IN-ONE-PROJECTOR MOUNT KITS, KITEC

- Best of ISE: Best New Classroom Accessory – rAVe – 2015



### SUSPENDED CEILING PROJECTOR SYSTEM, SYSAU

- Commercial Integrator Best Award – 2015

### FUSION SERIES MENU BOARD WALL MOUNT, LWM4X1U

- InfoComm Best of Show – Digital Signage Magazine – 2015



### K1D SERIES DYNAMIC DESK CLAMP MOUNTS

- ADEX Award – 2015



### FAVORITE MOUNT MANUFACTURER

- rAVE Readers' Choice Award – 2015





## ONLINE TOOLS

*In our continuing effort to be the easiest manufacturing partner to work with, Chief has a host of online tools and resources to make your next project as easy as possible.*

### **RACKBUILDER™**

RackBuilder is Chief's intuitive web application for visually configuring rack solutions with an extensive library of accessories and third party components.

[\*\*\*milestone.com/rackbuilder\*\*\*](https://milestone.com/rackbuilder)

### **CERTIFIED PARTNER PROGRAM**

Thousands of professionals have been using Chief's Certified Partner Program to differentiate their businesses and earn free industry credits in the process. The program is a great way to increase your Chief product knowledge, discover installation best practices and advance your career as an AV professional.

[\*\*\*milestone.com/certification\*\*\*](https://milestone.com/certification)

### **VIDEOS & ANIMATIONS**

Learn about our product features and how easy they are to install. View our videos or download them to look at later. They can also be embedded into your presentations or easily forwarded to coworkers.

[\*\*\*milestone.com/videos\*\*\*](https://milestone.com/videos)

### **CHIEF IMAGE LIBRARY**

Get all the product shots, application photos and videos you need for your website and marketing collateral on Chief's new Image Library. Register online to gain access!

[\*\*\*milestone.tandemvault.com\*\*\*](https://milestone.tandemvault.com)

### **AV CONSULTANT'S CORNER**

Chief's AV Consultant's Corner is our resource for Architects, Consultants and Designers. Chief also provides architects and designers with relevant downloadable documentation for many products – BIM Objects, CAD drawings, tech drawings and manuals. The documents can be found on the downloads tab of all our product pages.

[\*\*\*milestone.com/consultantscorner\*\*\*](https://milestone.com/consultantscorner)

### **LITERATURE DOWNLOADS**

Find product lines, brochures, new product flyers, whitepapers and application-focused solutions on the Chief literature page, where you can download, print or request copies.

[\*\*\*milestone.com/literature\*\*\*](https://milestone.com/literature)

### **THROW DISTANCE CALCULATOR**

Choose from an extensive lists of projectors and adjust room lighting, screen gain, application and diagonal to find the optimum distance for top performance.

[\*\*\*milestone.com/projectorcalc\*\*\*](https://milestone.com/projectorcalc)

### **AUTOMATED PRODUCT SERIAL COMMAND CALCULATOR**

Find serial commands for Chief's automated solutions by selecting a product and address.

[\*\*\*milestone.com/automatedcontrols\*\*\*](https://milestone.com/automatedcontrols)

# TABLE OF CONTENTS

## QUICK REFERENCE CHARTS

<b>6 - 7</b> Projector Mounts	<b>12 - 14</b> Freestanding Display Mounts
<b>7 - 10</b> Wall Display Mounts	<b>14 - 17</b> Monitor Mounts
<b>10 - 12</b> Ceiling Display Mounts	<b>17</b> Rack Systems

## PROJECTOR MOUNTS

<b>18 - 20</b> Elite® Series Projector Mounts	<b>27</b> Suspended Ceiling Storage Solutions
<b>21</b> RPEU® Series Ceiling Mounts	<b>28 - 30</b> Automated Projector Mounts & Accessories
<b>22</b> Projector Mount System	<b>31 - 33</b> WM Series Short Throw Mounts
<b>23</b> Application Specific Ceiling Projector Mounts	<b>34</b> WP2 Series Short Throw Mounts
<b>24 - 26</b> Ceiling Projector Mount Accessories	<b>35</b> Application Specific Wall Projector Mounts

## WALL DISPLAY MOUNTS

<b>36 - 40</b> Fusion® Fixed Mounts, ViewShare & Accessories	<b>50 - 53</b> Fusion Menu Board Mounts
<b>41</b> Thinstall™ Fixed Mounts & Accessories	<b>54 - 56</b> ConnexSys™ Video Wall System & Accessories
<b>42</b> Other Fixed Wall Mounts & Accessories	<b>57 - 59</b> Fusion Pull-Out Mounts & Accessories
<b>43 - 47</b> Fusion Tilt Mounts, ViewShare & Accessories	<b>60 - 63</b> Thinstall Swing Arm Mounts & Accessories
<b>48</b> Thinstall Tilt Mounts & Accessories	<b>64</b> Other Swing Arm Mounts & Accessories
<b>49</b> Other Tilt Wall Mounts & Accessories	

## CEILING DISPLAY MOUNTS

<b>65 - 67</b> Fusion Video Wall Mounts	<b>71 - 78</b> Fusion Ceiling Mounts & Accessories
<b>68 - 70</b> Fusion Menu Board Mounts	<b>79</b> Automated Ceiling Lift Mounts
<b>80 - 81</b> Other Ceiling, Truss & Pole Mounts & Accessories	



# TABLE OF CONTENTS

## FREESTANDING DISPLAY MOUNTS

**82 - 89** Fusion Video Wall Mounts & Accessories

**90 - 94** Fusion Carts & Stands, ViewShare & Accessories

**95** Automated Pop-Up Lift

**96 - 98** Other Cart & Stand Mounts & Accessories

**99** Table Stand Display Mounts

## MONITOR MOUNTS

**100 - 104** Kontour™ K1 Dynamic Height Adjust Desk Mounts & Accessories

**105 - 107** Kontour K2 Desk Mounts & Accessories

**108 - 111** Kontour K3 Static Desk Arrays & Accessories

**112 - 115** Kontour K4 Depth-Adjustable Desk Arrays & Accessories

**116 - 118** Kontour K1 Series Wall Mounts & Accessories

**119 - 120** Kontour K2 Series Wall Mounts & Accessories

**121 - 122** Kontour K4 Series Wall Mounts

**123 - 124** Kontour K1 Series Pole Mounts & Accessories

**125 - 126** Kontour K2 Series Pole Mounts & Accessories

## RACK SYSTEMS

**127 - 128** Raxxess™ S1 Series Knock Down Racks & Accessories

**129 - 130** Raxxess™ S2 Series Knock Down Racks & Accessories

**131 - 132** Raxxess G1 Series Gangable Racks & Accessories

**133 - 134** Raxxess E1 Series Enclosed Racks & Accessories

**135** Raxxess F1 Series Furniture Rack

**136 - 138** Raxxess Rotating & Pull-Out Racks & Accessories

**139** Raxxess On-Wall Racks


**140 - 141** Raxxess Freestanding Racks & Accessories

**142 - 143** Other Raxxess Rack Accessories

# QUICK REFERENCE CHART

 = QUALIFIES FOR LEED CREDIT







## CEILING PROJECTOR MOUNTS

Model	Product	Weight Capacity	Roll, Pitch, and Yaw	Dimensions (HxWxD)	Color	Page
<b>KITEC030045</b>		11.3 kg	3°, 15°, 360°	Various	 	19
<b>KITEC045080</b>		11.3 kg	3°, 15°, 360°	Various	 	19
<b>KITEC080135</b>		11.3 kg	3°, 15°, 360°	Various	 	19
<b>RPMEU</b> RPE ELITE™ SERIES		22.7 kg	3°, 20°, 360°	69 x 165 x 140 mm	 	20
<b>RSMEU</b> RPE ELITE SERIES		11.3 kg	3°, 15°, 360°	46 x 111 x 129 mm	 	20
<b>RPEU</b> RPE SERIES	 	22.7 kg	4°, 25°, 360°	44 x 165 x 140 mm	 	21
<b>RSEU</b> RPE SERIES	 	11.3 kg	3°, 20°, 360°	37 x 111 x 112 mm	 	21
<b>SYSAUW</b>		15.9 kg	+/-3°, +/-10°, +/-10°	Various		22
<b>VCMEU</b>		113.4 kg	5°, 20°, 360°	97 x 432 x 235 mm		23
<b>KITMZ006S</b>		11.3 kg	3°, 15°, 360°	Various		23

## AUTOMATED PROJECTOR MOUNTS

Model	Product	Extension	Weight Capacity	Max Projector Size (HxWxD)	Ceiling Opening (HxWxD)	Ceiling Closure (WxD)	Page
<b>SL220</b> SMART-LIFT		216 mm	13.6 kg	241 x 419 x 470 mm	284 x 597 x 597 mm	489 x 526 mm	29
<b>SL236i</b> SMART-LIFT		914 mm	15.9 kg	235 x 521 x 578 mm	282 x 648 x 724 mm	607 x 607 mm	29
<b>SL151i</b> SMART-LIFT		211 mm	15.9 kg	213 x 464 x 464 mm	284 x 597 x 597 mm	514 x 515 mm	29

## WALL PROJECTOR MOUNTS



Model	Product	Extension	Weight Capacity	Pitch	Lateral Shift	Dimensions (HxWxD)	Page
<b>WM210AUS</b> WM SERIES		 EXTENDS UP TO 495 mm	11.3 kg	±3°	330 mm	293 x 499 x 586 mm	32
<b>WM220AUS</b> WM SERIES		 EXTENDS UP TO 768 mm	11.3 kg	±3°	330 mm	293 x 499 x 904 mm	32
<b>WM230AUS</b> WM SERIES		 EXTENDS UP TO 1,384 cm	11.3 kg	±3°	330 mm	29 x 50 x 151 cm	32
















# QUICK REFERENCE CHART

 = QUALIFIES FOR LEED CREDIT

## WALL PROJECTOR MOUNTS

Model	Product	Extension	Weight Capacity	Pitch	Lateral Shift	Dimensions (HxWxD)	Page
<b>WM110AUS</b> WM SERIES		<b>S</b> EXTENDS UP TO 457 mm	11.3 kg	±3°	N/A	360 x 185 x 551 mm	33
<b>WM120AUS</b> WM SERIES		<b>M</b> EXTENDS UP TO 724 mm	11.3 kg	±3°	N/A	360 x 185 x 869 mm	33
<b>WM130AUS</b> WM SERIES		<b>L</b> EXTENDS UP TO 1,334 cm	11.3 kg	±3°	N/A	360 x 185 x 1479 mm	33
<b>WP21US</b> WP SERIES		<b>S</b> EXTENDS UP TO 562 mm	11.3 kg	±3°	44 mm	22 x 48 x 62 cm	34
<b>WP22US</b> WP SERIES		<b>M</b> EXTENDS UP TO 968 mm	11.3 kg	±3°	44 mm	22 x 48 x 103 cm	34
<b>WP23US</b> WP SERIES		<b>L</b> EXTENDS UP TO 1,375 cm	11.3 kg	±3°	44 mm	22 x 48 x 143 cm	34
<b>WMA1S</b> WALL MOUNT ACCESSORY		<b>S</b> EXTENDS UP TO 495 mm	Concrete/Wood 68 kg Steel Stud 22.7 kg	N/A	N/A	361 x 185 x 292 mm	35
<b>WMA2S</b> WALL MOUNT ACCESSORY		<b>M</b> EXTENDS UP TO 533 mm	Concrete/Wood 68 kg Steel Stud 22.7 kg	N/A	N/A	292 x 470 x 330 mm	35




## FIXED DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Page
<b>XSM1U</b> FUSION <sup>®</sup> SERIES	 	<b>XL</b> 55 - 90"	113.4 kg	667 x 1086 x 57 mm	200 x 200 - 1086 x 600	426 mm	25 mm	37
<b>LSM1U</b> FUSION SERIES	 	<b>L</b> 37 - 80"	90.7 kg	464 x 883 x 51 mm	100 x 100 - 881 x 400	426 mm	25 mm	37
<b>LSA1U</b> FUSION SERIES	 	<b>L</b> 37 - 80"	90.7 kg	455 x 883 x 51 mm	100 x 100 - 876 x 400	390 mm	N/A	37
<b>MSM1U</b> FUSION SERIES	 	<b>M</b> 26 - 47"	56.7 kg	464 x 654 x 51 mm	100x 100 - 653 x 400	198 mm	25 mm	38
<b>MSA1U</b> FUSION SERIES	 	<b>M</b> 26 - 47"	56.7 kg	455 x 654 x 51 mm	100 x 100 - 647 x 400	161 mm	N/A	38
<b>LSTU</b> THININSTALL <sup>™</sup> SERIES		<b>L</b> 37 - 63"	56.7 kg	628 x 907 x 10 mm	200 x 200 mm - 800 x 500 mm	N/A	N/A	41
<b>MSTU</b> THININSTALL SERIES		<b>M</b> 26 - 47"	56.7 kg	530 x 706 x 10 mm	100 x 100 mm - 600 x 400 mm	N/A	N/A	41
<b>PSMH</b> MULTIPLE MODELS		<b>XL</b> 60 - 108"	136 kg	635 x 924 x 74 mm	400 x 400 mm - 800 x 400 mm	N/A	N/A	42



























# QUICK REFERENCE CHART

 = QUALIFIES FOR LEED CREDIT







## FIXED DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Page
<b>FSRV</b>		 10 - 32"	20.4 kg	178 x 152 x 19 mm	75 x 75 mm, - 200 x 100 mm	N/A	N/A	42
<b>PAC101</b>		N/A	9.1 kg	55 x 356 x 264 mm	N/A	N/A	N/A	42

## TILT DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Tilt	Page
<b>XTM1U</b> FUSION <sup>®</sup> SERIES	 	 55 - 90"	113.4 kg	68.6 x 123.4 x 5.1 cm	622 x 1086 x 64 mm	542 mm	+5°, -12°	44
<b>LTM1U</b> FUSION SERIES	 	 37 - 80"	90.7 kg	432 x 883 x 51 mm	100 x 100 mm - 895 x 505 mm	441 mm	+2°, -12°	44
<b>LTA1U</b> FUSION SERIES	 	 37 - 80"	90.9 kg	419 x 883 x 50.8 mm	100 x 100 mm - 895 x 505 mm	441 mm	+2°, -12°	44
<b>MTM1U</b> FUSION SERIES	 	 26 - 55"	56.7 kg	432 x 654 x 51 mm	100 x 100 mm - 667 x 400 mm	327 mm	+2°, -12°	45
<b>MTMP1U</b> FUSION SERIES	 	 26 - 55"	56.7 kg	622 x 530 x 81 mm	100 x 100 mm - 600 x 460 mm	265 mm	+5°, -12°	45
<b>MTA1U</b> FUSION SERIES	 	 26 - 55"	56.7 kg	419 x 654 x 51 mm	100 x 100 mm - 673 x 400 mm	327 mm	+2°, -12°	45
<b>LTTU</b> THINSTALL <sup>™</sup> SERIES		 37 - 80"	45.4 kg	548 x 907 x 19 mm	200 x 200 mm - 800 x 500 mm	N/A	-12°	48
<b>MTTU</b> THINSTALL SERIES		 26 - 55"	45.4 kg	448 x 706 x 19 mm	100 x 100 mm - 600 x 400 mm	N/A	-12°	48
<b>MWCU</b>		 26 - 55"	45.4 kg	303 x 487 x 114 mm	100 x 100 mm - 709 x 431 mm	N/A	-15°	49
<b>FTRV</b>		 10 - 32"	20.4 kg	142 x 141 x 46 mm	75 x 75 mm - 200 x 100 mm	N/A	+5°, -15°	49

## MENU BOARD DISPLAY WALL MOUNTS





Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt	Page
<b>LWM5X1U</b>		 40 - 55"	56.7 kg	43 x 490 x 15 cm	any width x 100-400 mm	147-173 mm	20°	51
<b>LWM4X1U</b>		 40 - 55"	56.7 kg	43 x 399 x 15 cm	any width x 100-400 mm	147-173 mm	20°	51
<b>LWM3X1U</b>		 40 - 55"	56.7 kg	43 x 276 x 15 cm	any width x 100-400 mm	147-173 mm	20°	51
<b>LWM3X1UP</b>		 40 - 55"	56.7 kg	43 x 175 x 15 cm	any width x 100-400 mm	147-173 mm	20°	52























# QUICK REFERENCE CHART

 = QUALIFIES FOR LEED CREDIT

## MENU BOARD DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt	Page
<b>LWM2X1U</b>		 40 - 55"	56.7 kg	43 x 183 x 15 cm	any width x 100-400 mm	147-173 mm	20°	52
<b>LWM2X1UP</b>		 40 - 55"	56.7 kg	43 x 119 x 15 cm	any width x 100-400 mm	147-173 mm	20°	52

## VIDEO WALL DISPLAY

Model	Product	Screen Size	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust	Page
<b>LVS1U</b> CONNEXSYS™ SERIES		 42 - 80"	68 kg	485 x 903 x 102 mm	200 x 200 - 700 x 400 mm	+4°/-2.5°	± 25 mm	85 mm	55
<b>LVS1UP</b> CONNEXSYS SERIES		 40 - 80"	68 kg	825 x 496 x 104 mm	200 x 200 - 800 x 400 mm	+4°/-2.5°	± 25 mm	85 mm	55
<b>LVSXU</b> CONNEXSYS SERIES		 42 - 80"	68 kg	485 x 903 x 102 mm	200 x 200 - 700 x 400 mm	+4°/-2.5°	± 25 mm	85 mm	55
<b>LVSXUP</b> CONNEXSYS SERIES		 40 - 80"	68 kg	825 x 496 x 104 mm	200 x 200 - 800 x 400 mm	+4°/-2.5°	± 25 mm	85 mm	55
<b>LSMVU</b> FUSION™ SERIES	 	 37 - 63"	68 kg	533 x 879 x 94 mm	200 x 200 mm - 760 x 505 mm		445 mm	272 mm	57
<b>LSMVPU</b> FUSION SERIES	 	 37 - 63"	68 kg	826 x 523 x 94 mm	200 x 200 mm - 800 x 400 mm		102 mm	272 mm	57
<b>MSMVU</b> FUSION SERIES	 	 26 - 47"	56.7 kg	419 x 648 x 94 mm	100 x 100 mm - 540 x 400 mm		368 mm	272 mm	58
<b>MSMVPU</b> FUSION SERIES	 	 26 - 47"	56.7 kg	620 x 523 x 94 mm	100 x 100 mm - 600 x 400 mm		254 mm	272 mm	58



## SWING ARM DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Extension	Page
<b>TS525TU</b> THINSTALL™ SERIES		 37 - 58"	56.7 kg	527 x 749 x 38 mm	100 x 100 mm - 800 x 400 mm	635 mm	406 mm	61
<b>TS325TU</b> THINSTALL SERIES		 26 - 52"	34 kg	439 x 749 x 46 mm	100 x 100 mm - 600 x 400 mm	635 mm	406 mm	61
<b>TS318TU</b> THINSTALL SERIES		 26 - 52"	34 kg	439 x 574 x 46 mm	100 x 100 mm - 600 x 400 mm	457 mm	406 mm	61
<b>TS318SU</b> THINSTALL SERIES		 26 - 52"	34 kg	343 x 574 x 46 mm	100 x 100 mm - 600 x 400 mm	457 mm	N/A	61
<b>TS218SU</b> THINSTALL SERIES		 26 - 47"	34 kg	356 x 330 x 38 mm	100 x 100 mm - 400 x 400 mm	457 mm	N/A	62
<b>TS118SU</b> THINSTALL SERIES		 10 - 32"	15.9 kg	294 x 330 x 38 mm	75 x 75 mm - 200 x 200 mm	457 mm	N/A	62











# QUICK REFERENCE CHART

 = QUALIFIES FOR LEED CREDIT














## SWING ARM DISPLAY WALL MOUNTS

Model	Product	Screen Size	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Extension	Page
<b>TS110SU</b> THININSTALL SERIES		 10 - 32"	15.9 kg	239 x 356 x 38 mm	75 x 75 mm - 200 x 200 mm	250 mm	N/A	62
<b>PDRUB</b>		 42 - 80"	90.7 kg	560 x 1003 x 86 mm	200 x 200 mm - 862 x 517 mm	940 mm	229 mm	64
<b>PNRUB</b>		 42 - 80"	90.7 kg	538 x 687 x 84 mm	200 x 200 mm - 862 x 517 mm	635 mm	229 mm	64

## VIDEO WALL DISPLAY CEILING MOUNTS

Model	Product	Screen Size	Configuration	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Page
<b>LCM3X3U</b> FUSION SERIES		 40 - 55"	3 wide x 3 tall Landscape	38.5 kg	199.6 x 276.3 x 36.8 cm	Any Width x 100 - 400 mm	66
<b>LCM3X2U</b> FUSION SERIES		 40 - 55"	3 wide x 2 tall Landscape	56.7 kg	138.9 x 276.6 x 36.8 cm	Any Width x 100 - 400 mm	66
<b>LCM3X2UP</b> FUSION SERIES		 40 - 55"	3 wide x 2 tall Portrait	56.7 kg	199.6 x 174.8 x 36.8 cm	Any Width x 100 - 400 mm	66
<b>LCM2X2U</b> FUSION SERIES		 40 - 55"	2 wide x 2 tall Landscape	56.7 kg	138.9 x 185.1 x 36.8 cm	Any Width x 100 - 400 mm	67
<b>LCM2X2UP</b> FUSION SERIES		 40 - 55"	2 wide x 2 tall Portrait	56.7 kg	199.6 x 118.9 x 36.8 cm	Any Width x 100 - 400 mm	67

## MENU BOARD DISPLAY CEILING MOUNTS



















Model	Product	Screen Size	Configuration	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Page
<b>LCM3X1U</b> FUSION <sup>®</sup> SERIES		 40 - 55"	3 wide Landscape	56.7 kg	42.5 x 276.6 x 20.1 cm	Any Width x 100 - 400 mm	51 mm	68
<b>LCM3X1UP</b> FUSION SERIES		 40 - 55"	3 wide Portrait	56.7 kg	82.6 x 175 x 20.1 mm	Any Width x 100 - 800 mm	51 mm	68
<b>LCB3X1U</b> FUSION <sup>®</sup> SERIES		 40 - 55"	3 wide Back-to-Back Landscape	56.7 kg	42.5 x 276.3 x 29.2 cm	Any Width x 100 - 400 mm	51 mm	69
<b>LCB3X1UP</b> FUSION SERIES		 40 - 55"	3 wide Back-to-Back Portrait	56.7 kg	82.6 x 174.8 x 29.2 cm	Any Width x 100 - 800 mm	51 mm	69
<b>LCM2X1U</b> FUSION SERIES		 40 - 55"	2 wide Landscape	56.7 kg	42.7 x 185.1 x 20.1 cm	Any Width x 100 - 400 mm	N/A	69
<b>LCM2X1UP</b> FUSION SERIES		 40 - 55"	2 wide Portrait	56.7 kg	82.6 x 119 x 20.1 cm	Any Width x 100 - 800 mm	N/A	70
<b>LCB2X1U</b> FUSION SERIES		 40 - 55"	2 wide Back-to-Back Landscape	45.4 kg	42.5 x 185.1 x 29.6 cm	Any Width x 100 - 400 mm	N/A	70
<b>LCB2X1UP</b> FUSION SERIES		 40 - 55"	2 wide Back-to-Back Portrait	45.4 kg	82.6 x 119 x 29.6 cm	Any Width x 100 - 800 mm	N/A	70



# QUICK REFERENCE CHART

 = QUALIFIES FOR LEED CREDIT




## CEILING DISPLAY MOUNTS

Model	Product	Screen Size	Configuration	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Page
<b>XCM7000</b> FUSION SERIES		<b>XL</b> 60 - 90"	Single Landscape	136 kg	425 x 884 x 203 mm	800 x 400 mm	+7.5°/ -20°	71
<b>XCB7000</b> FUSION SERIES		<b>XL</b> 60 - 90"	Back-to-Back Landscape	136 kg	425 x 884 x 300 mm	800 x 400 mm	+7.5°/ -20°	71
<b>XCM1U</b> FUSION SERIES		<b>XL</b> 60 - 90"	Single Landscape	113.4 kg	425 x 884 x 201 mm	200 x 100 - 800 x 400 mm	+5°, -20°	72
<b>XCB1U</b> FUSION SERIES		<b>XL</b> 60 - 90"	Back-to-Back Landscape	90.7 kg	425 x 884 x 296 mm	200 x 100 - 800 x 400 mm	+5°, -20°	72
<b>LCM1U</b> FUSION SERIES		<b>L</b> 32 - 60"	Single Landscape	56.7 kg	420 x 681 x 162 mm	200 x 100 - 616 x 400 mm	+5°, -20°	72
<b>LCM1UP</b> FUSION SERIES		<b>L</b> 32 - 60"	Single Portrait	56.7 kg	826 x 529 x 162 mm	200 x 100 - 460 x 800 mm	+5°, -20°	73
<b>LCB1U</b> FUSION SERIES		<b>L</b> 32 - 60"	Back-to-Back Landscape	56.7 kg	420 x 681 x 259 mm	200 x 100 - 616 x 400 mm	+5°, -20°	73
<b>LCB1UP</b> FUSION SERIES		<b>L</b> 32 - 60"	Back-to-Back Portrait	56.7 kg	826 x 529 x 259 mm	200 x 100 - 460 x 800 mm	+5°, -20°	73
<b>LCM1X2U</b> FUSION SERIES		<b>L</b> 32 - 60"	1 wide x 2 tall Single-Sided Landscape	56.7 kg	420 x 681 x 162 mm	200 x 100 - 616 x 400 mm	+5°, -20°	74
<b>LCB1X2U</b> FUSION SERIES		<b>L</b> 32 - 60"	1 wide x 2 tall Back-to-Back Landscape	45.3 kg	420 x 681 x 259 mm	200 x 100 - 616 x 400 mm	+5°, -20°	74
<b>LCM4U</b> FUSION SERIES		<b>L</b> 32 - 65"	Quad Mount	38 kg	47.5 142.2 x 142.2 cm	200 x 200 - 600 x 400 mm	+5°, -20°	74
<b>LCM3U</b> FUSION SERIES		<b>L</b> 32 - 65"	Triple Mount	57 kg	46.2 118.4 x 118.4 cm	200 x 200 - 600 x 400 mm	+5°, -20°	74
<b>MCM1U</b> FUSION SERIES		<b>M</b> 26 - 50"	Single Landscape or Portrait	56.7 kg	420 x 529 x 162 mm	200 x 100 - 460 x 400 mm	+5°, -20°	75
<b>MCB1U</b> FUSION SERIES		<b>M</b> 26 - 50"	Back-to-Back Landscape	56.7 kg	419 x 529 x 259 mm	200 x 100 - 460 x 400 mm	+5°, -20°	75
<b>MCM1X2U</b> FUSION SERIES		<b>M</b> 26 - 50"	1 wide x 2 tall Single-Sided Landscape	56.7 kg	419 x 529 x 162 mm	200 x 100 - 460 x 400 mm	+5°, -20°	75
<b>MCB1X2U</b> FUSION SERIES		<b>M</b> 26 - 50"	1 wide x 2 tall Back-to-Back Landscape	45.3 kg	420 x 529 x 259 mm	200 x 100 - 460 x 400 mm	+5°, -20°	75
Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Page	
<b>CM2C40UI</b> AUTOMATED		<b>L</b> 32 - 61"	86.2 kg	794 x 603 x 197 mm	200 x 200 - 862 x 517 mm	N/A	79	
<b>TPSU</b>		<b>L</b> 42 - 71"	68 kg	412 x 433 x 27 mm	200 x 200 - 862 x 517 mm	N/A	80	
















# QUICK REFERENCE CHART

 = QUALIFIES FOR LEED CREDIT

## CEILING DISPLAY MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Page
<b>TPMU</b>		<b>L</b> 42 - 71"	68 kg	412 x 433 x 86 mm	200 x 200 mm - 862 x 517 mm	±15°	80
<b>JPPU</b>		<b>M</b> 26 - 45"	34 kg	189 x 152 x 89 mm	100 x 100 mm - 400 x 400 mm	±15°	80
<b>KOP100B</b>		<b>S</b> 10 - 30"	18.14 kg	114.3 x 193 x 121.9 mm	75 x 75 mm - 100 x 100 mm	+75°, -10°	80



## FREESTANDING VIDEO WALL DISPLAY MOUNTS

Model	Product	Screen Size	Configuration	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Page
<b>LVM3X3U</b> FUSION SERIES		<b>L</b> 42 - 46"	3 wide x 3 tall Freestanding Landscape	45.4 kg	235 x 274.3 x 102.6 cm	Any Width x 100 - 400 mm	19 mm	83
<b>LBM3X3U</b> FUSION SERIES		<b>L</b> 42 - 46"	3 wide x 3 tall Bolt-down Landscape	45.4 kg	231 x 277 x 23.9 cm	Any Width x 100 - 400 mm	19 mm	83
<b>LVM3X2U</b> FUSION SERIES		<b>L</b> 42 - 46"	3 wide x 2 tall Freestanding Landscape	56.7 kg	189.3 x 274.3 x 102.6 cm	Any Width x 100 - 400 mm	19 mm	83
<b>LVM3X2UP</b> FUSION SERIES		<b>L</b> 42 - 46"	3 wide x 2 tall Freestanding Portrait	45.4 kg	271 x 172.7 x 102.6 cm	100 - 800 mm x Any Height	19 mm	83
<b>LBM3X2U</b> FUSION SERIES		<b>L</b> 42 - 46"	3 wide x 2 tall Bolt-down Landscape	56.7 kg	185.2 x 276.6 x 23.9 cm	Any Width x 100 - 400 mm	19 mm	84
<b>LBM3X2UP</b> FUSION SERIES		<b>L</b> 42 - 46"	3 wide x 2 tall Bolt-down Portrait	45.4 kg	250.4 x 172.7 x 24.4 cm	100 - 800 mm x Any Height	19 mm	84
<b>LVM3X1UP</b> FUSION SERIES		<b>L</b> 42 - 46"	3 wide x 1 tall Freestanding Portrait	56.7 kg	225.3 x 172.7 x 102.6 cm	100 - 800 mm x Any Height	19 mm	84
<b>LBM3X1UP</b> FUSION SERIES		<b>L</b> 42 - 46"	3 wide x 1 tall Bolt-down Portrait	56.7 kg	204.7 x 172.7 x 24.4 cm	100 - 800 mm x Any Height	19 mm	84
<b>LBM1X3U</b> FUSION SERIES		<b>L</b> 42 - 65"	1 wide x 3 tall Bolt-down Landscape	56.7 kg	2145 x 914 x 191 mm	100 x 100 mm - 900 x 400 mm	19 mm	85
<b>LVM2X2U</b> FUSION SERIES		<b>L</b> 42 - 50"	2 wide x 2 tall Freestanding Landscape	56.7 kg	2045 x 1842 x 1026 mm	Any Width x 100 - 400 mm	19 mm	85
<b>LVM2X2UP</b> FUSION SERIES		<b>L</b> 42 - 50"	2 wide x 2 tall Freestanding Portrait	45.4 kg	271 x 116.8 x 102.6 cm	100 - 800 mm x Any Height	19 mm	85
<b>LBM2X2U</b> FUSION SERIES		<b>L</b> 42 - 50"	2 wide x 2 tall Bolt-down Landscape	56.7 kg	185.2 x 185.2 x 23.9 cm	Any Width x 100 - 400 mm	19 mm	85
<b>LBM2X2UP</b> FUSION SERIES		<b>L</b> 42 - 50"	2 wide x 2 tall Bolt-down Portrait	45.4 kg	250.4 x 116.8 x 24 cm	100 - 800 mm x Any Height	19 mm	86
<b>LBM1X2U</b> FUSION SERIES		<b>L</b> 42 - 80"	1 wide x 2 tall Bolt-down Landscape	56.7 kg	1689 x 914 x 191 mm	100 x 100 mm - 900 x 400 mm	19 mm	86
<b>LBM1X2UP</b> FUSION SERIES		<b>L</b> 42 - 80"	1 wide x 2 tall Bolt-down Portrait	56.7 kg	2145 x 914 x 191 mm	100 x 100 mm - 800 x 900 mm	19 mm	86





# QUICK REFERENCE CHART


 = QUALIFIES FOR LEED CREDIT





## FREESTANDING VIDEO WALL DISPLAY MOUNTS

Model	Product	Screen Size	Configuration	Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Page
<b>XBM1U</b> FUSION SERIES		<b>XL</b> 42 - 80"	1 wide x 1 tall, Bolt-down, Landscape	113 kg	2143 x 914 x 191 mm	100 x 100 mm - 900 x 400 mm	19 mm	86
<b>XBM1UP</b> FUSION SERIES		<b>XL</b> 42 - 80"	1 wide x 1 tall, Bolt-down, Portrait	113 kg	2083 x 914 x 191 mm	100 x 100 mm - 800 x 900 mm	19 mm	87


## FREESTANDING DISPLAY MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Page
<b>XVAU</b> FUSION SERIES		<b>XL</b> 37 - 70"	113 kg	139.5 x 98.6 x 73.7 cm	200 x 200 - 800 x 400 mm	106.4 - 128 cm	±2.5°	90
<b>XPAU</b> FUSION SERIES		<b>XL</b> 55 - 100"+	136 kg	187.7 x 147.2 x 87.8 cm	200 x 200 - 800 x 400 mm	121.3 - 166.2 cm	±5°	90
<b>LPAU</b> FUSION SERIES		<b>L</b> 40 - 80"	90.7 kg	180.1 x 114.3 x 84.4 cm	200 x 200 - 800 x 400 mm	127.1 - 177.9 cm	±5°	91
<b>LFAU</b> FUSION SERIES		<b>L</b> 40 - 80"	90.7 kg	183.9 x 96.8 x 77.7 cm	200 x 200 - 800 x 400 mm	113 - 164 cm	±5°	91
<b>MPAU</b> FUSION SERIES		<b>M</b> 37 - 55"	56.7 kg	197.9 x 121.4 x 81.3 cm	200 x 100 - 600 x 400 mm	127 - 177 cm	±5°	91
<b>MFAU</b> FUSION SERIES		<b>M</b> 37 - 55"	56.7 kg	183.9 x 96.8 x 77.7 cm	200 x 100 - 600 x 400 mm	113 - 163 cm	±5°	91

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Maximum Extension	Overall Travel	Page
<b>CM2L40</b> AUTOMATED		<b>L</b> 32 - 61"	86.2 kg	77.8 x 60.3 x 19.5 cm	200 x 200 - 862 x 517 mm	180.3 cm	101.6 cm	95

Model	Product	Screen Size	Weight Cap. (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Page
<b>PFCU</b>		<b>L</b> 42 - 71"	90.7 kg	207.3 x 94.3 x 81.6 cm	200 x 200 - 862 x 517 mm	122 - 183 cm	±15°	96
<b>PF1U</b>		<b>L</b> 42 - 71"	90.7 kg	238.8 x 91.4 x 76.2 cm	200 x 200 - 862 x 517 mm	130 - 217 cm	±15°	96
<b>MFCU</b>		<b>M</b> 30 - 55"	56.7 kg	197.5 x 94.3 x 81.6 cm	100 x 100 - 709 x 431 mm	122 - 183 cm	±15°	96
<b>MF1U</b>		<b>M</b> 30 - 55"	56.7 kg	232.7 x 91.4 x 76.2 cm	100 x 100 - 709 x 431 mm	130 - 218 cm	±15°	97

## TABLE STAND DISPLAY MOUNTS





Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust	Swivel Options	Page
<b>STLU</b>		<b>M</b> 32 - 52"	56.7 kg	603 x 698 x 140 mm	100 x 100 - 600 x 400 mm	N/A	15°, 30°, 45° or 90°	99





























# QUICK REFERENCE CHART













 = QUALIFIES FOR LEED CREDIT

## TABLE STAND DISPLAY MOUNTS

Model	Product	Screen Size	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust	Swivel Options	Page
<b>PTSU</b>		 30 - 50"	45.4 kg	545 x 607 x 278 mm	200 x 200 - 860 x 515 mm	102 mm	N/A	99
<b>STS1</b>		 18 - 30"	13.6 kg	409 x 152 x 175 mm	75 x 75 - 100 x 100 mm	130 mm	90°, 180°, 270°	99

## DESK MONITOR MOUNTS

Model	Product	Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors	Page
<b>K1C220</b> KONTOUR™ SERIES		90 mm	523 mm	2.3 - 9.9 kg	 	101
<b>K1C210</b> KONTOUR SERIES		62 mm	352 mm	2.3 - 11.3 kg (per monitor)	 	101
<b>K1C22H</b> KONTOUR SERIES		166 mm	597 mm	0.9 - 4.1 kg	 	101
<b>K1C120</b> KONTOUR SERIES		140 mm	571 mm	2.3 - 9.9 kg	 	101
<b>K1C110</b> KONTOUR SERIES		62 mm	400 mm	2.3 - 11.3 kg (per monitor)	 	102
<b>K1D230</b> KONTOUR SERIES		62 mm	714 mm	2.3 - 4.54 kg (per monitor)	 	102
<b>K1D220</b> KONTOUR SERIES		105 mm	548 mm	2.3 - 11.3 kg	 	102
<b>K1D22H</b> KONTOUR SERIES		118 mm	549 mm	0.9 - 4.1 kg	 	102
<b>K1D130</b> KONTOUR SERIES		62 mm	648 mm	2.3 - 4.54 kg (per monitor)	 	103
<b>K1D120</b> KONTOUR SERIES		92 mm	523 mm	2.3 - 11.3 kg	 	103


















Model	Product	Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors	Page
<b>K2C220</b> KONTOUR SERIES		105 mm	448 mm	9.9 kg	 	105
<b>K2C22H</b> KONTOUR SERIES		166 mm	509 mm	0.9 - 4.1 kg	 	105
<b>K2C120</b> KONTOUR SERIES		152 mm	495 mm	9.9 kg	 	106
<b>K2C110</b> KONTOUR SERIES		152 mm	324 mm	9.9 kg	 	106

(Silver displays shown with Apple® Cinema Display adapter, not included.)

# QUICK REFERENCE CHART

 = QUALIFIES FOR LEED CREDIT

## DESK MONITOR MOUNTS


Model	Product	Center of Display to Floor/Table Range	Maximum Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Capacity (per monitor)	Color	Page
<b>K3F220B</b> KONTOUR™ SERIES		460 mm	736 mm	±12°	10 - 27"	6.8 kg	<b>B</b>	109
<b>K3G220B</b> KONTOUR SERIES		460 mm	736 mm	±12°	10 - 27"	6.8 kg	<b>B</b>	109
<b>K3G320B</b> KONTOUR SERIES		460 mm	2 x 2: 1301 mm 3 x 2: 650 mm	±12°	10 - 30"	6.8 kg	<b>B</b>	109
<b>K3F310B</b> KONTOUR SERIES		N/A	Dual: 1301 mm Triple: 650 mm	Outer - ±12° Center - ±10°	Dual: up to 30" Triple: up to 27"	6.8 kg	<b>B</b>	110
<b>K3G310B</b> KONTOUR SERIES		N/A	Dual: 1301 mm Triple: 650 mm	Outer - ±12° Center - ±10°	Dual: up to 30" Triple: up to 27"	6.8 kg	<b>B</b>	110
<b>K3F120B</b> KONTOUR SERIES		460 mm	N/A	±10°	10 - 30"	6.8 kg	<b>B</b>	110
<b>K3G120B</b> KONTOUR SERIES		460 mm	N/A	±10°	10 - 30"	6.8 kg	<b>B</b>	110
<b>K4G610B</b> KONTOUR SERIES		291 - 463 mm	614 mm	815 mm	up to 24"	6.8 kg	<b>B</b>	112
<b>K4G510B</b> KONTOUR SERIES		291 - 463 mm	614 mm	592 mm	up to 24"	6.8 kg	<b>B</b>	112
<b>K4G410B</b> KONTOUR SERIES		291 - 463 mm	614 mm	396 mm	up to 24"	6.8 kg	<b>B</b>	113
<b>K4G310B</b> KONTOUR SERIES		291 - 463 mm	614 mm	239 mm	up to 24"	6.8 kg	<b>B</b>	113
<b>K4G210B</b> KONTOUR SERIES		291 - 463 mm	943 mm	239 mm	up to 24"	6.8 kg	<b>B</b>	113
<b>K4G120B</b> KONTOUR SERIES		291 - 463 mm	406 mm	239 mm	up to 24"	6.8 kg	<b>B</b>	113
<b>K4G620</b> KONTOUR SERIES		269 - 1107 mm	584 mm	815 mm	up to 24"	6.8 kg	<b>B</b>	114
<b>K4G520</b> KONTOUR SERIES		269 - 1107 mm	584 mm	592 mm	up to 24"	6.8 kg	<b>B</b>	114
<b>K4G420</b> KONTOUR SERIES		269 - 1107 mm	584 mm	396 mm	up to 24"	6.8 kg	<b>B</b>	114
<b>K4G320</b> KONTOUR SERIES		269 - 1107 mm	584 mm	318 mm	up to 24"	6.8 kg	<b>B</b>	114


(Silver displays shown with Apple® Cinema Display adapter, not included.)




# QUICK REFERENCE CHART

 = QUALIFIES FOR LEED CREDIT

## WALL MONITOR MOUNTS


Model	Product	Minimum Depth from Wall	Maximum Extension	Tilt	Weight Capacity (per monitor)	Colors	Page
<b>K1W220</b> KONTOUR SERIES		62 mm	525 mm	+75°, -10°	2.3 - 11.3 kg	<b>B</b>	117
<b>K1W120</b> KONTOUR SERIES		62 mm	512 mm	+75°, -10°	2.3 - 11.3 kg	<b>S</b> <b>B</b>	117
<b>K1W110</b> KONTOUR SERIES		62 mm	341 mm	+75°, -10°	2.3 - 11.3 kg	<b>B</b>	117
<b>K2W120</b> KONTOUR SERIES		74 mm	437 mm	±15°	18.1 kg	<b>S</b> <b>B</b>	119

Model	Product	Minimum Depth from Wall	Maximum Extension	Tilt	Weight Capacity (per monitor)	Colors	Page
<b>KOW100</b>		66 mm	N/A	+75°, -10°	11.3 kg	<b>S</b> <b>B</b>	120

Model	Product	Max. Monitor Width	Extension	Minimum Depth	Arm Rotation	Typical Screen Size	Tilt	Weight Cap. (per monitor)	Page
<b>K4W310B</b> KONTOUR SERIES		614 mm	412 mm	239 mm	0 - 20°	up to 24"	±12°	6.8 kg	121
<b>K4W210B</b> KONTOUR SERIES		943 mm	412 mm	239 mm	0 - 20°	up to 30"	±12°	6.8 kg	121
<b>K4W120B</b> KONTOUR SERIES		406 mm	412 mm	94 mm	0 - 20°	up to 24"	±10°	6.8 kg	122

## POLE MONITOR MOUNTS












Model	Product	Minimum Depth from Pole	Maximum Extension	Tilt	Weight Capacity (per monitor)	Colors	Page
<b>K1P220</b> KONTOUR SERIES		62 mm	510 mm	+75°, -10°	2.3 - 11.3 kg	<b>B</b>	123
<b>K1P120</b> KONTOUR SERIES		64 mm	493 mm	+75°, -10°	2.3 - 11.3 kg	<b>S</b> <b>B</b>	123
<b>K2P120</b> KONTOUR SERIES		74 mm	422 mm	±15°	18.1 kg	<b>B</b>	125

Model	Product	Minimum Depth from Pole	Typical Screen Size	Tilt	Weight Capacity	Colors	Page
<b>KOP100</b>		66 mm	10 - 30"	+75°, -10°	18.1 kg	<b>S</b> <b>B</b>	126

# QUICK REFERENCE CHART

 = QUALIFIES FOR LEED CREDIT

## RACK SYSTEMS

Model	Product	Available Depths	Available Heights	Page
<b>S1 SERIES</b> KNOCK DOWN RACKS		584 or 711 mm Depths	12, 20, 28, 36, 41 or custom space	127 - 128
<b>S2 SERIES</b> KNOCK DOWN RACKS		508 mm Depth	15 or 20 space	129 - 130
<b>G1 SERIES</b> GANGABLE RACKS		584 or 838 mm Depths	28, 36 or 44 space	131 - 132
<b>E1 SERIES</b> ENCLOSED RACKS		584 or 711 mm Depths	20, 28, 36 or 44 space	133 - 134
<b>F1 SERIES</b> FREESTANDING RACKS		508 mm Depth	12, 20 or 28 space	135
<b>ROTR</b> ROTATING RACKS		480 mm Depth	8 or 24 space	137
<b>ROTR-XL</b> ROTATING RACKS		582 mm Depth	8 or 24 space	137
<b>ROTR-HD</b> ROTATING RACKS		597 mm Depth	24 - 44 or custom space	137
<b>POTR &amp; POTR-XL</b> PULL-OUT RACKS		467 or 533 mm Depths	8 or 24 space	137
<b>W2 SERIES</b> FIXED WALL RACKS		420 mm Depth	8 or 12 space	139
<b>ER</b> FREESTANDING RACKS		406 or 457 mm Depths	4 - 20 space	140
<b>ERK</b> FREESTANDING RACKS		406 or 508 mm Depths	4 - 16 space	140





## ELITE® SERIES PROJECTOR MOUNT FEATURES



### MICROZONE™ ADJUSTMENTS

Designed with MicroZone Adjustments to make projector registration fast and precise.



### CENTRIS® TECHNOLOGY

Enables effortless fingertip positioning and self-adjusts to support different projector weights.



### CABLE MANAGEMENT

Route cables through the top of the mount without additional accessories.



### QUICK CONNECT/DISCONNECT

Disconnecting maintains registration without affecting pre-set adjustments.



### SECURITY

Keyed locking and steel-into-steel locking hardware at all connection points to protect against theft.



### MULTIPLE CONNECTION OPTIONS

Mounting options include: CPAE pin connection column system, CMS threaded column system, 6mm threaded rods, and flush mounting to the ceiling.

**KITEC030045** ALL-IN-ONE PROJECTOR MOUNT KIT

Chief's projector kits offer convenient flexibility with a super sleek design and even quicker installation. Bundled kit includes:

- RSMEU Mini Elite® Universal Projector Mount
- CPA116 Flat Ceiling Plate
- 300–450 mm Telescoping Column

Weight Capacity	Roll, Pitch and Yaw	Extension	Dimensions (LxWxH)	Colors
11.3 kg	3°, 15°, 20°	300 – 450 mm	144 x 144 x 535 mm	W B

**KITEC045080** ALL-IN-ONE PROJECTOR MOUNT KIT

Chief's projector kits offer convenient flexibility with a super sleek design and even quicker installation. Bundled kit includes:

- RSMEU Mini Elite® Universal Projector Mount
- CPA116 Flat Ceiling Plate
- 450–800 mm Telescoping Column

Weight Capacity	Roll, Pitch and Yaw	Extension	Dimensions (LxWxH)	Colors
11.3 kg	3°, 15°, 20°	500 – 800 mm	144 x 144 x 885 mm	W B

**KITEC080135** ALL-IN-ONE PROJECTOR MOUNT KIT

Chief's projector kits offer convenient flexibility with a super sleek design and even quicker installation. Bundled kit includes:

- RSMEU Mini Elite® Universal Projector Mount
- CPA116 Flat Ceiling Plate
- 800–1350 mm Telescoping Column

Weight Capacity	Roll, Pitch and Yaw	Extension	Dimensions (LxWxH)	Colors
11.3 kg	3°, 15°, 20°	800 – 1350 mm	144 x 144 x 1435 mm	W B



## RPMEU ELITE® PROJECTOR MOUNT



Chief's elite ceiling projector mounts are packed with easy-to-use features that save time and provide projector security.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
22.7 kg	3°, 20°, 360°	69 x 165 x 140 mm	W B



## RSMEU MINI ELITE™ PROJECTOR MOUNT



Ideal for smaller projector models, these miniature versions of the Elite mounts include all the same great features in almost half the size.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
11.3 kg	3°, 15°, 360°	46 x 111 x 129 mm	W B



## RPEU® SERIES CEILING MOUNTS

### FEATURES



#### INDEPENDENT ADJUSTMENTS

Includes roll, pitch and yaw adjustments for quick and precise projector alignment.



#### QUICK CONNECT/DISCONNECT

Disconnecting maintains registration without affecting pre-set adjustments.



#### CABLE MANAGEMENT

Route cables through the top of the mount without additional accessories.



#### ALL-POINTS SECURITY

Exclusive steel-into-steel locking hardware at all connection points to protect against theft.



#### MULTIPLE CONNECTION OPTIONS


Mounting options include: CPAE pin connection column system, CMS threaded column system, 6 mm threaded rods and flush mounting to ceiling.

## RPEU PROJECTOR MOUNT



Chief's standard ceiling projector mount is installed in more offices, schools and homes worldwide than any other mount.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
22.7 kg	4°, 25°, 360°	44 x 165 x 140 mm	W B

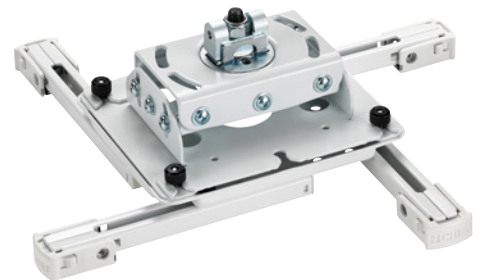


## RSEU MINI RPE PROJECTOR MOUNT



Ideal for smaller projector models, these miniature versions of the RPEU mounts include all the same great features in almost half the size.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Colors
11.3 kg	3°, 20°, 360°	37 x 111 x 112 mm	W B

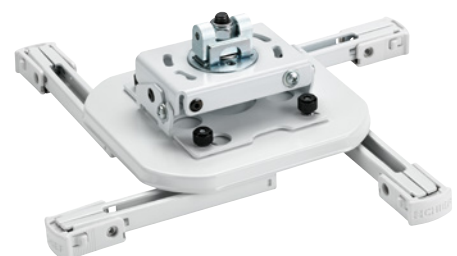



## PROJECTOR MOUNT SYSTEM FEATURES



### ADJUSTABLE CEILING PLATE

Allows placement above or below tile and accommodates inconsistent T-grids.



### TOOL-FREE ADJUSTMENTS

Tool-Free Microzone and Centris technology make projector registration fast and precise with macro and micro adjustments.



### HEIGHT ADJUSTABLE COLUMN

Column instantly adjusts from 0 to 305 mm, eliminating the need to specify column length.



### CABLE MANAGEMENT

Separate lay-in channels for high and low voltage cables without additional accessories.



### COMPLETE SOLUTION

Single SKU system includes everything required for suspended ceiling mounting and comes out of the box ready to install.

## SYSAU PROJECTOR MOUNT SYSTEM





The improved ceiling plate, column system, mount and universal interface of the SYSAU Projector Mount System are designed to cut installation time by one-third.

SYSAU	Weight Capacity	Dimensions (HxWxD)	Projector Travel from Ceiling	Colors
	15.9 kg	504 x 634 x 184 mm	80 x 374 mm in 13 mm increments	W

Mount*	Dimensions (HxWxD)	Roll, Pitch, Yaw
	45 x 178 x 177 mm	±3°, ±10°, ±10°

\* Dimensions for mount without column or interface.

Ceiling Plate	Dimensions (HxWxD)	Height Adjust	Column Rotation	Column Shift
	117 x 634 x 184 mm	26 mm	360°	234 mm

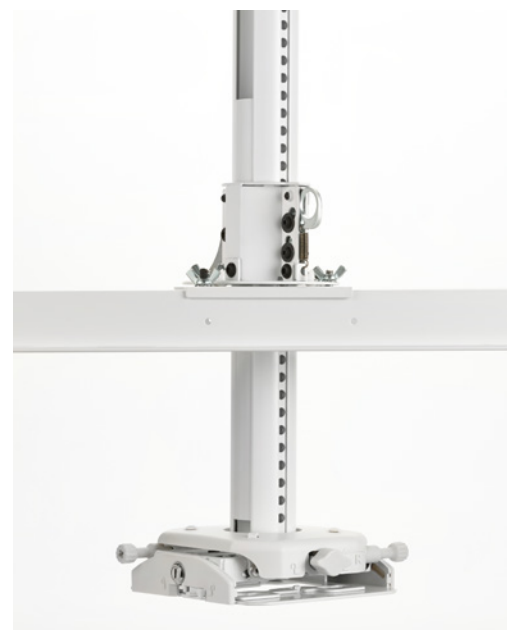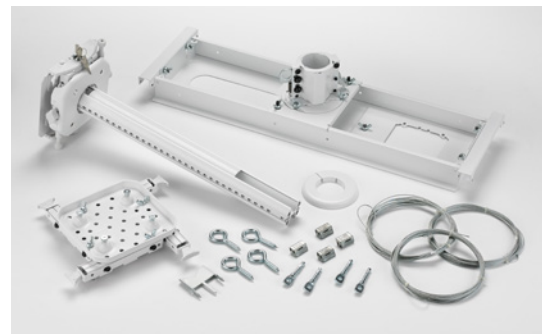

## APPLICATION SPECIFIC CEILING PROJECTOR MOUNTS

### VCMEU HEAVY DUTY MOUNT



Heavy-duty steel mount for mounting heavy projectors.  
Micro adjustments allow you to quickly achieve registration.

Weight Capacity	Roll, Pitch and Yaw	Dimensions (HxWxD)	Color
113.4 kg	5°, 20°, 360°	97 x 432 x 235 mm	<b>B</b>



### KITMZ006S SUSPENDED CEILING KIT



Weight Capacity	Colors
11.3 kg	<b>S</b>


Bundled kit includes:

- RSMAUS Mini Elite® Universal Projector Mount
- CMSZ006S Fully Threaded Extension Column
- CMS440 Lightweight Suspended Ceiling Kit

*Fits standard 600 x 600 ceiling tiles.*



## PIN CONNECTION PROJECTOR MOUNT ACCESSORIES



CPA116	Weight Capacity	Colors
Flat Ceiling Plate	34 kg	Ⓢ ⓑ



CPA330	Weight Capacity
Pin Connection Offset Ceiling Plate	226.8 kg



CPA365	Weight Capacity
Pin Connection Pole and Truss Adapter	226.8 kg




CPA395	Weight Capacity
Pin Connection Angled Ceiling Plate	226.8 kg



CPA263	Weight Capacity	Colors
CPA Column to CPA Column Connector	226.8 kg	Ⓢ ⓑ



CPA264	Weight Capacity
Pin Connection Coupler	226.8 kg



CMA345	Weight Capacity
Structural Ceiling Plate	226.8 kg



CPAE Columns	Weight Capacity
Fixed, pin-connection extension columns available in black and white*	226.8 kg
Model	Length
CPAE030	300 mm
CPAE080	800 mm
CPAE100	1000 mm
CPAE150	1500 mm
CPAE300	3000 mm
* All part numbers listed are black. To order white add W to the end of the part number.	



CPA640	Compatibility	Colors
Decorative Tile Ring	Threaded & CPA Columns	Ⓢ ⓑ



CMA274	Colors
Quick-Snap Cable Cover – 1219 mm long	Ⓢ ⓑ

## THREADED PROJECTOR MOUNT ACCESSORIES



CMS115	Colors	Weight Capacity
Speed-Connect™ Ceiling Plate	Ⓢ ⓑ	226.8 kg



CMA330	Weight Capacity
Offset Ceiling Plate – 203 mm	226.8 kg



CMA395	Colors	Weight Capacity
Angled Ceiling Plate	ⓑ Ⓢ	226.8 kg



CMA347	Weight Capacity
Vibration Isolating Coupler	15.9 kg

## THREADED PROJECTOR MOUNT ACCESSORIES



CMS440	Weight Capacity
Speed-Connect Above-Tile Suspended Ceiling Kit	22.7 kg



CMA640	Compatibility	Colors
Decorative Ring, 48 mm ID	Threaded & CPA Columns	



CMA643	Compatibility
Decorative Ring, 62 mm ID - Silver	CMS Outer Adjustable Columns



CMA351	Weight Capacity
Heavy Duty Swivel Adapter	226.8 kg



CMA110	Colors	Weight Capacity
Ceiling Plate - 203 mm		226.8 kg



CMSZ006	Colors	Weight Capacity
152 mm Fully Threaded Column		226.8 kg



CMS Fixed Columns		Weight Capacity	
Fixed 1 1/2" NPT extension columns available in black, silver and white*		500 lbs (226.8 kg)	
Model	Length	Model	Length
CMS003*	3" (76 mm)	CMS024	2' (0.6 m)
CMS006*	6" (152 mm)	CMS036	3' (0.9 m)
CMS009	9" (229 mm)	CMS048	4' (1.2 m)
CMS012	12" (305 mm)	CMS060	5' (1.5 m)
CMS018	18" (457 mm)	CMS072	6' (1.8 m)
* All part numbers listed are black. To order white add a W to the end of the part number.			



CMS Adjustable Columns		Weight Capacity	
Adjustable threaded extension columns available in black and white*		226.8 kg	
Model	Length	Model	Length
CMS006009	152 - 229 mm	CMS0203	0.6 - 0.9 m
CMS009012	229 - 305 mm	CMS0305	0.9 - 1.5 m
CMS012018	305 - 457 mm	CMS0406	1.2 - 1.8 m
CMS018024	457 - 610 mm	CMS0507	1.5 - 2.1 m
* All part numbers listed are black. To order white add a W to the end of the part number.			



## CEILING PROJECTOR MOUNT ACCESSORIES



PG1A	Max Equipment Size (HxWxD)	Colors
Large Projector Guard	191 x 508 x 518 mm	



PG2A	Max Equipment Size (HxWxD)	Colors
Small Projector Guard	191 x 406 x 406 mm	



PG3A	Max Equipment Size (HxWxD)	Colors
Extra Large Projector Guard	288 x 635 x 633 mm	




HC1	Includes
Heavy-Duty Cable system	SA1, cable, padlock, security pads, super glue



LC1	Includes
Security Cable Lock Kit	Coiled cable, padlock, security pads, super glue



SLBLEG	Compatibility	Colors
Extra Large Projector Guard	RPE, RPME, RSE and RSME Series	



SEC2	Compatibility
Security Cable Kit for SLBU	RPE, RPME, RSE and RSME Series



LCD2C	Compatibility
Dual Projector Ceiling Stacker	Requires two RPE or RPME projector mounts



LCD2TS	Compatibility
Dual Projector Table Stand Stacker	Requires two RPE or RPME projector mounts



LCDPA	Compatibility
Stacker Arm	RPE and RPME projector mounts



LCDCP	Weight Capacity
Stacker Ceiling Plate	45.4 kg

# SUSPENDED CEILING STORAGE SOLUTIONS

## FEATURES

- DROP-DOWN ACCESS

Unique feature lowers the entire frame enough to slide the ceiling tile out of the way for servicing.
- PERFECT PLACEMENT

Maximized column location within tile space for less reliance on digital adjustments and lens shift.
- CONVENIENT PRELOADING

AV components can be preloaded to shelf before bringing it to the ceiling.
- THERMAL MANAGEMENT


Passive cooling vents help with thermal management and an accessory fan is available for active cooling.



	CMS491	Weight Capacity
	Half Tile Plenum Storage Box	45 kg

	CMS491C	Weight Capacity
	Half Tile Plenum Storage Box w/ Column Drop	45 kg

	CMS492	Weight Capacity
	Full Tile Plenum Storage Box	45 kg

	CMS492C	Weight Capacity
	Full Tile Plenum Storage Box w/ Column Drop	45 kg

# AUTOMATED PROJECTOR MOUNTS

## AUTOMATED PROJECTOR MOUNTS FEATURES



### QUIET OPERATION

Provides exceptionally smooth and quiet movement, making it a great option for homes and corporate offices.



### MULTIPLE CONTROL OPTIONS

Choose from single push-button, low-voltage controller and IR options. Also accepts 5-30V AC/DC for triggering commands. AMX/Crestron control compatibility.



### SAFE & SUSTAINABLE

CE, UL, TUV, FC and WEEE certifications recognize safe design and environmentally friendly construction.



### MULTIPLE INSTALLATION OPTIONS

Multiple mounting options for finished and suspended ceilings including threaded extension columns, threaded rods and suspension cables.



**SL220 SMART-LIFT**

Simple 3-step installation process requires only one person. Designed to fit 600 x 600 mm ceiling tiles.

Weight Capacity	Extension	Max Projector Size (HxWxD)	Ceiling Opening (HxWxD)	Ceiling Closure (WxD)
13.6 kg	216 mm	241 x 419 x 470 mm	284 x 597 x 597 mm	489 x 526 mm

*RSMEUW projector mount is required. Remote control and IR eye are included.*

**SL236I SMART-LIFT**

Provides 914 mm of downward travel with three stopping positions. Includes adjustments for precise positioning. Order SL236SPI for suspended ceiling installations and SL236FDI for fixed/structured ceiling installations.

Weight Capacity	Extension	Max Projector Size (HxWxD)	Ceiling Opening (HxWxD)	Ceiling Closure (WxD)
15.9 kg	914 mm	235 x 521 x 578 mm	282 x 648 x 724 mm	607 x 607 mm

*SLBUW Interface is required. Remote control and IR eye are not included.*

**SL151I SMART-LIFT**

Provides exceptionally smooth and quiet movement. Great for suspended and finished ceilings in homes and corporate offices.

Weight Capacity	Extension	Max Projector Size (HxWxD)	Ceiling Opening (HxWxD)	Ceiling Closure (WxD)
15.9 kg	211 mm	213 x 464 x 464 mm	284 x 597 x 597 mm	514 x 515 mm

*SLBUW Interface is required. Remote control and IR eye are not included.*



## AUTOMATED PROJECTOR MOUNT ACCESSORIES



IR10	Compatibility
Infrared Remote Control*	SL151, SL236 and SL220






*\*Included with SL220i*





# WALL PROJECTOR MOUNTS

## WM SERIES SHORT THROW MOUNTS FEATURES

- 
**PRECISION HEIGHT AND LEVELING**  
 Industry-first micro height and leveling adjustment.
- 
**FAST INSTALLATION**  
 Innovative quick-connect system for a speedy install.
- 
**INTEGRATED CABLE MANAGEMENT**  
 Fully internal cable management system conceals and protects cables for a clean finish.
- 
**VARIABLE EXTENSION OPTIONS**  
 Telescoping extension and infinite projector placement make it easy to achieve a picture perfect installation.
- 
**MULTIPLE INSTALLATION OPTIONS**  
 Designed for mounting to concrete, block wall, wood or steel studs. Hardware Included.



PRECISION HEIGHT  
& LEVELING



VARIABLE EXTENSION  
OPTIONS

**WM210AUS** EXTENDS UP TO 495 mm

Small dual stud short throw mount. Includes Mini Elite\* Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	330 mm	293 x 499 x 586 mm

**WM220AUS** EXTENDS UP TO 768 mm

Medium dual stud short throw mount. Includes Mini Elite\* Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	330 mm	293 x 499 x 904 mm

**WM230AUS** EXTENDS UP TO 1384 mm

Large dual stud short throw mount. Includes Mini Elite\* Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	330 mm	293 x 499 x 1513 mm



WM110AUS EXTENDS UP TO 457 mm



Small single stud short throw mount. Includes Mini Elite\* Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	N/A	360 x 185 x 551 mm



WM120AUS EXTENDS UP TO 724 mm



Medium single stud short throw mount. Includes Mini Elite Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	N/A	360 x 185 x 869 mm



WM130AUS EXTENDS UP TO 1334 mm



Large single stud short throw mount. Includes Mini Elite Projector Mount.

Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	N/A	360 x 185 x 1479 mm



## WP2 SERIES SHORT THROW MOUNT

### FEATURES



#### PRECISION ADJUSTMENT

Integrated micro pitch and lateral shift adjustment to speed up image registration.



#### VARIABLE EXTENSION OPTION

Projector mount slides along arm for infinite projector placement.



#### INTEGRATED CABLE MANAGEMENT

Aesthetic covers and internal cable management system conceal and protect cables for a clean finish.



#### MULTIPLE INSTALLATION OPTIONS

Designed for mounting to concrete, block wall, wood or steel studs. Includes mounting hardware.

### WP21US EXTENDS UP TO 562 mm



Small economical dual or single stud short throw mount.  
Includes Mini Projector Mount.



Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	44 mm	219 x 485 x 618 mm

### WP22US EXTENDS UP TO 968 mm



Medium economical dual or single stud short throw mount.  
Includes Mini Projector Mount.



Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	44 mm	219 x 485 x 1025 mm

### WP23US EXTENDS UP TO 1375 mm



Large economical dual or single stud short throw mount.  
Includes Mini Projector Mount.



Weight Capacity	Level	Lateral Shift	Dimensions (HxWxD)
11.3 kg	±3°	44 mm	219 x 485 x 1432 mm

APPLICATION SPECIFIC  
WALL PROJECTOR MOUNTS

WMA1S WALL MOUNT ACCESSORY, SINGLE STUD



Heavy duty wall mount accessory for mounting projectors or flat panels in single stud or concrete applications

Weight Capacity	Extension	Dimensions (HxWxD)
Concrete/Wood 68 kg Steel Stud 22.7 kg	292 – 482 mm	361 x 185 x 292 mm



WMA2S WALL MOUNT ACCESSORY, DUAL STUD




A heavy-duty wall mount accessory for mounting projectors or flat panels in dual stud or concrete applications.

Weight Capacity	Extension	Dimensions (HxWxD)
Concrete/Wood 68 kg Steel Stud 34 kg	330 – 533 mm	292 x 470 x 330 mm





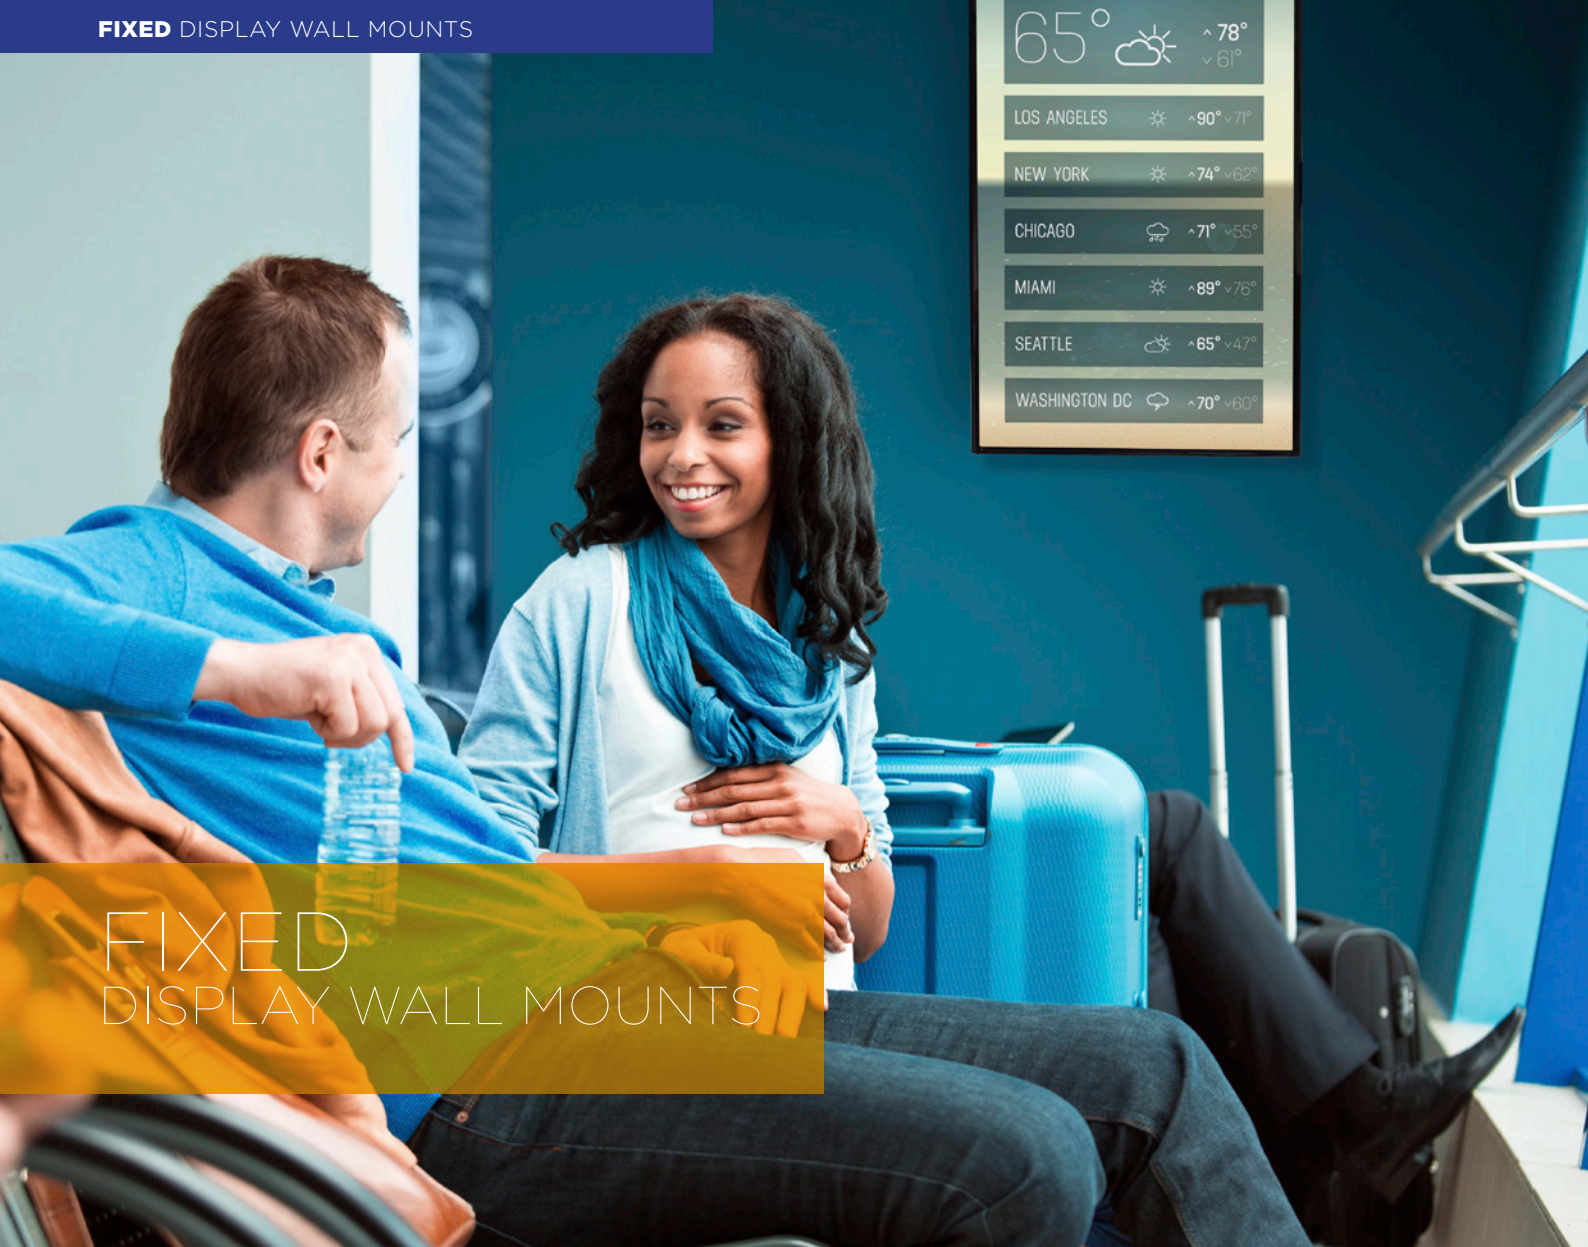

## FIXED DISPLAY WALL MOUNTS

### FUSION™ FIXED MOUNT FEATURES



#### CONTROLZONE™ LEVELING

Post-installation fine-tuning of height and leveling eliminates time needed for repositioning the mount and adjusts the entire configuration, not just the display.



#### CENTERLESS™ SHIFT

Generous post-installation lateral shift allows for perfect display positioning.



#### CLICKCONNECT™

Tool-less latching makes an audible click when a Fusion mount is safely engaged with the screen.

#### NEW ENHANCEMENTS


We kept all the features installers love while adding new benefits they asked for. Upgrades include:

- Super stability with set screws to keep the mount rigid
- Nesting spacers to achieve three different depths
- Faster installation with new teardrop design
- Quick-store cords
- Improved cable management with redesigned end caps

**XSM1U** 55 - 90" MICRO-ADJUST MOUNT


For extra large displays with wide and/or tall mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust
113.4 kg	667 x 1086 x 57 mm	200 x 200 - 1086 x 600 mm	542 mm	25 mm

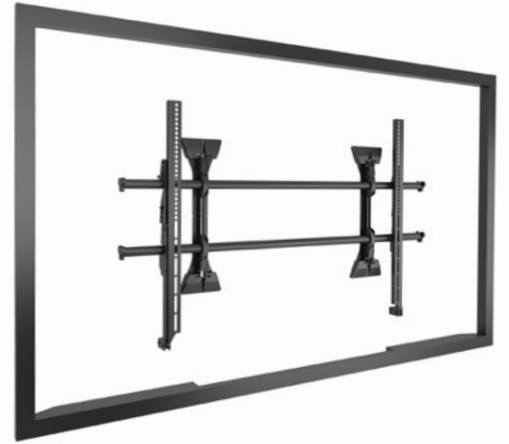**LSM1U** 37 - 80" MICRO-ADJUST MOUNT


Our top performing fixed mount fits most displays on the market.


Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust
90.7 kg	464 x 883 x 51 mm	100 x 100 - 881 x 400 mm	441 mm	25 mm

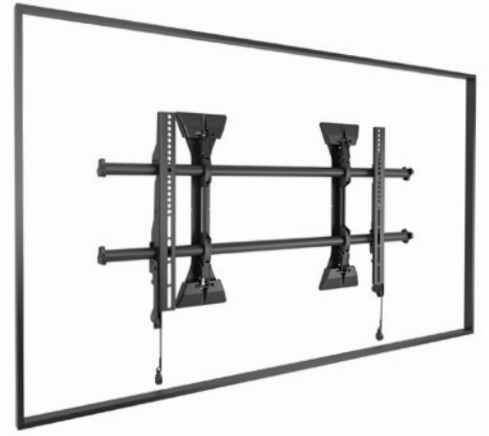**LSA1U** 37 - 80" WALL MOUNT

This option without micro height adjustment is ideal for installs using Chief connector kits for multi-display installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust
90.7 kg	455 x 883 x 51 mm	100 x 100 - 876 x 400 mm	441 mm	N/A

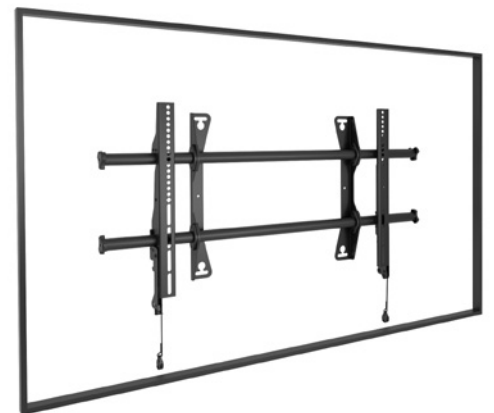

**MSM1U** 26 - 47" MICRO-ADJUST MOUNT

The smaller version of the LSM1U for shorter and/or narrower mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust
56.7 kg	464 x 654 x 51 mm	100x 100 - 653 x 400 mm	327 mm	25 mm

**MSA1U** 26 - 47" WALL MOUNT

This option without micro height adjustment is ideal for installs using Chief connector kits for multi-display installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust
56.7 kg	455 x 654 x 51 mm	100 x 100 - 647 x 400 mm	327 mm	N/A



## VIEWSHARE VIDEO CONFERENCING KITS

### FEATURES & SPECIFICATIONS

#### FLEXIBLE PLACEMENT

HD camera can be installed above, below or between displays.

#### EASY CONNECTIVITY

ViewShare is fast and easy to setup using familiar USB connectivity, simplifying adoption for end users.

#### PEER-TO-PEER SOFTWARE

ViewShare's components are Skype™ for Business Certified, and optimized for Lync™ and Skype.

#### THE RIGHT SIZED SOLUTION


ViewShare kits are available with and without a USB to CAT5 extender to suite a variety of room sizes. For huddle spaces and small conference rooms order the FCA800V, FCA810V or FCA820V. For larger conference rooms order the FCA800VE, FCA810VE or FCA820VE.

#### WHAT'S INCLUDED?

- Mount accessory with integrated HD camera (Logitech C930E)
- USB 2.0 type A cable (305 mm)
- Belkin® powered USB hub
- Jabra® 410MS USB speakerphone
- Black Box® USB to CAT5 extender with power supply (on E models only)

#### SYSTEM REQUIREMENTS

- Windows 7 or 8
- Mac OSX 10.7 or higher
- 2.4 GHz Dual Core processor or better
- 2 GB RAM or more
- USB 2.0 port (USB 3.0 ready)

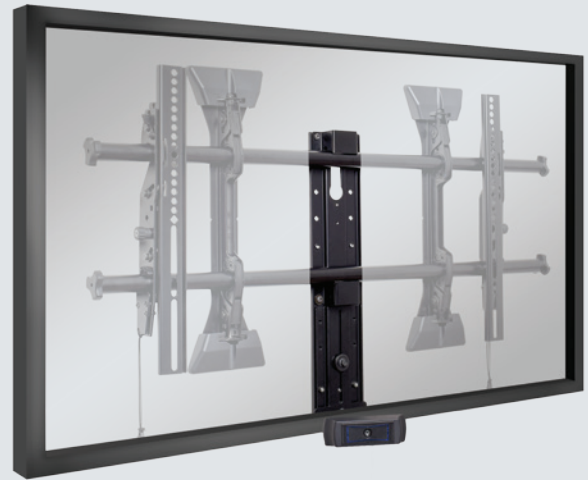

BELKIN USB HUB



USB 2.0 CABLE



BLACK BOX USB TO CAT5 EXTENDER



JABRA USB SPEAKERPHONE



FCA800V/810V/820V		Compatibility
ViewShare Video Conference Kits without Extender		Fusion Series cart, stand and wall mounts
Model	Display Sizes	Camera Placement
FCA800V	Large	Above/Below
FCA810V	XL	Above/Below
FCA820V	Large & XL	Center



FCA800VE/810VE/820VE		Compatibility
ViewShare Video Conference Kits with Extender		Fusion Series cart, stand and wall mounts
Model	Display Sizes	Camera Placement
FCA800VE	Large	Above/Below
FCA810VE	XL	Above/Below
FCA820VE	Large & XL	Center

## FUSION™ FIXED MOUNT ACCESSORIES



FCA830/ FCA840		Compatibility
Center Channel Speaker Adapter		Fusion Fixed & Tilt Wall, Free-standing & Ceiling Mounts
Model	Typical Screen Size	Weight Capacity
FCA830	52 - 80"	9.1 kg
FCA840	70 - 100"+	9.1 kg



FCA810/ FCA811		Compatibility
Above/Below Shelf, XL* Displays		Fusion Fixed & Tilt Wall, Free-standing & Ceiling Mounts
Model	Size	Weight Capacity
FCA810	203 mm	9.1 kg
FCA811	355 mm	9.1 kg

\* Typical screen size: 70-100".



FCA831/ FCA841		Compatibility
Center Channel Speaker Adapter		Fusion Fixed & Tilt Wall, Free-standing & Ceiling Mounts
Model	Typical Screen Size	Weight Capacity
FCA831	42 - 70"	4.5 kg/side
FCA841	50 - 95"	4.5 kg/side



FCA820/ FCA821		Compatibility
Fusion Center Camera Shelf		Fusion Ceiling, Freestanding and Wall Mounts
Model	Size	Weight Capacity
FCA820	203 mm	9.1 kg
FCA821	355 mm	9.1 kg



FCA112	Equipment Depth Range	Compatibility
Secure CPU/Media Player Adapter	0 - 41 mm	Large & Extra Large Fusion Wall Mounts



FCA113	Compatibility
Extension Accessory for Behind-Mount Storage Space	All Fusion Wall Mounts



FCA802/FCA812		Compatibility
Component Shelf, Large and XL Displays		Fusion Fixed & Tilt Wall, Free-standing & Ceiling Mounts
Model	Typical Screen Size	Weight Capacity
FCA802	46 - 70"	9.1 kg
FCA812	70 - 100"	9.1 kg



FCK000/008/016		Compatibility
Connector Kits		Fusion Fixed & Tilt Wall Mounts
Model	Width	
FCK000	Adds zero length to the poles	
FCK008	203 mm	
FCK016	406 mm	



FCA106	Compatibility
Side Cover Accessory	Fusion Fixed & Tilt Wall Mounts



FCA800/ FCA801		Compatibility
Above/Below Shelf, Large* Displays		Fusion Fixed & Tilt Wall, Free-standing & Ceiling Mounts
Model	Size	Weight Capacity
FCA800	203 mm	9.1 kg
FCA801	355 mm	9.1 kg

\*Typical screen size: 46-70".

## THININSTALL™ FIXED MOUNT

### FEATURES



#### ULTRA-LOW PROFILE

At less than the width of a penny, these mounts provide an ultra-thin profile to showcase any flat-screen display.



#### GLIDE LOCK™

Tool-less latching with a sliding flag for fast installation.



#### CABLE KICKSTAND

A kickstand makes cable access convenient while the open wall plate allows for easy electrical placement behind the display.



GLIDE LOCK™ LATCH



CABLE MANAGEMENT

## LSTU 37 - 63" ULTRA-LOW PROFILE



Thinner than the diameter of a penny, this versatile mount is great for ultra-slim flat panels.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)
56.7 kg	628 x 907 x 10 mm	200 x 200 - 800 x 500 mm



## MSTU 26 - 47" ULTRA-LOW PROFILE



Accommodates different mounting patterns than the LSTU and allows for landscape and portrait orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)
56.7 kg	530 x 706 x 10 mm	100 x 100 - 600 x 400 mm





## OTHER FIXED WALL MOUNTS

### PSMH OVER 60" HEAVY DUTY MOUNTS



A heavy-duty series of mounts for extra large flat panels with custom solutions available.

Model	Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)
PSMH2840	136.1 kg	635 x 924 x 74 mm	400 x 400 - 800 x 400 mm
PSMH2841	124.7 kg	533 x 495 x 32 mm	400 x 400 mm
PSMH2482	118.8 kg	896 x 1575 x 102 mm	Custom

Visit [chiefmfg.com](http://chiefmfg.com) for additional PSMH model specifications.



### FSRV 10 - 32" WALL MOUNT



A simple wall mount for small displays. The ultra low profile allows for portrait or landscape options with Q-Latch™ mounting system.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)
20.4 kg	178 x 152 x 19 mm	75 x 75 - 200 x 100 mm



### PAC101 COMPONENT WALL SHELF

Provides a fast and simple wall installation for CPUs and other components.

Weight Capacity	Dimensions (HxWxD)	Color
9.1 kg	55 x 356 x 264 mm	<b>S</b> <b>B</b>



### FIXED CPU MOUNT ACCESSORY



PAC103	Compatibility
Accessory Shelf Safety Strap	PAC101



## TILT DISPLAY WALL MOUNTS

### FUSION™ TILT MOUNT FEATURES



**CONTROLZONE™ LEVELING**  
Post-installation fine-tuning of height and leveling eliminates time needed for repositioning the mount and adjusts the entire configuration, not just the display.



**CENTERLESS™ SHIFT**  
Generous post-installation lateral shift allows for perfect display positioning.



**CENTRIS™ LOW-PROFILE TILT**  
Uses the center of gravity to balance the screen while maintaining a low profile. The display stays in place until readjusted.



**CLICKCONNECT™**  
Tool-less latching makes an audible click when a Fusion mount is safely engaged with the screen.

#### NEW ENHANCEMENTS


We kept all the features installers love while adding new benefits they asked for. Upgrades include:

- Super stability with set screws to keep the mount rigid
- Nesting spacers to achieve three different depths
- Faster installation with new teardrop design
- Quick-store cords
- Improved cable management with redesigned end caps

**XTM1U** 55 - 90" MICRO-ADJUST MOUNT


Works best with extra large displays with wide and/or tall mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Tilt
113.4 kg	622 x 1086 x 64 mm	200 x 200 - 1250 x 660 mm	542 mm	25 mm	+5°, -12°

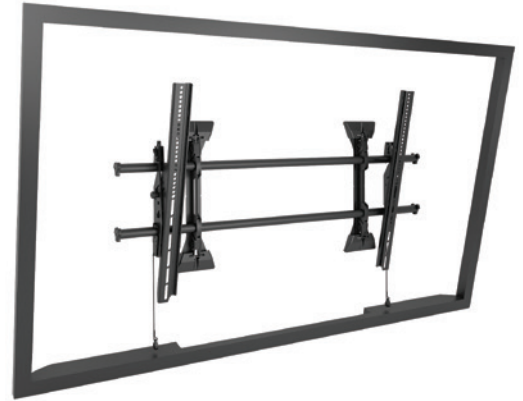**LTM1U** 37 - 80" MICRO-ADJUST MOUNT


Our top performing tilt mount fits most displays on the market.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Tilt
90.7 kg	432 x 883 x 51 mm	100 x 100 - 895 x 505 mm	441 mm	25 mm	+2°, -12°

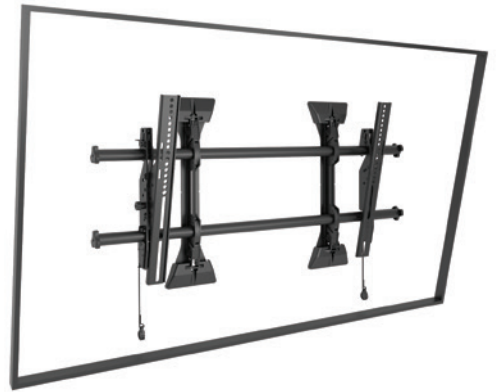
**LTA1U** 37 - 80" WALL MOUNT

This option without micro height adjustment is ideal for installs using Chief connector kits for multi-display installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Tilt
90.9 kg	419 x 883 x 50.8 mm	100 x 100 - 895 x 505 mm	441 mm	N/A	+2°, -12°

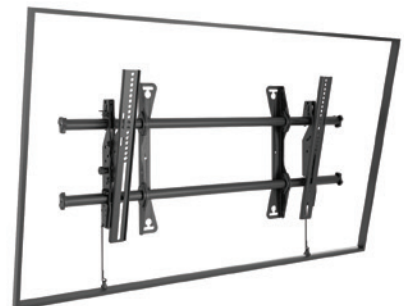

## MTM1U 26 - 55" MICRO-ADJUST MOUNT



Simpler install with only two attach points.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Tilt
56.7 kg	432 x 654 x 51 mm	100 x 100 - 667 x 400 mm	327 mm	25 mm	+2°, -12°



## MTMP1U 26 - 55" PORTRAIT/MICRO-ADJUST



The portrait version of the popular MTM1U.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Tilt
56.7 kg	622 x 530 x 81 mm	100 x 100 - 600 x 460 mm	265 mm	25 mm	+5°, -12°



## MTA1U 26 - 55" WALL MOUNT



This option without micro height adjustment is ideal for installs using Chief connector kits for multi-display needs.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Height Adjust	Tilt
56.7 kg	419 x 654 x 51 mm	100 x 100 - 673 x 400 mm	327 mm	N/A	+2°, -12°



## VIEWSHARE VIDEO CONFERENCING KITS

### FEATURES & SPECIFICATIONS

#### FLEXIBLE PLACEMENT

HD camera can be installed above, below or between displays.

#### EASY CONNECTIVITY

ViewShare is fast and easy to setup using familiar USB connectivity, simplifying adoption for end users.

#### PEER-TO-PEER SOFTWARE

ViewShare's components are Skype™ for Business Certified, and optimized for Lync™ and Skype.

#### THE RIGHT SIZED SOLUTION


ViewShare kits are available with and without a USB to CAT5 extender to suite a variety of room sizes. For huddle spaces and small conference rooms order the FCA800V, FCA810V or FCA820V. For larger conference rooms order the FCA800VE, FCA810VE or FCA820VE.

#### WHAT'S INCLUDED?

- Mount accessory with integrated HD camera (Logitech C930E)
- USB 2.0 type A cable (305 mm)
- Belkin® powered USB hub
- Jabra® 410MS USB speakerphone
- Black Box® USB to CAT5 extender with power supply (on E models only)

#### SYSTEM REQUIREMENTS

- Windows 7 or 8
- Mac OSX 10.7 or higher
- 2.4 GHz Dual Core processor or better
- 2 GB RAM or more
- USB 2.0 port (USB 3.0 ready)

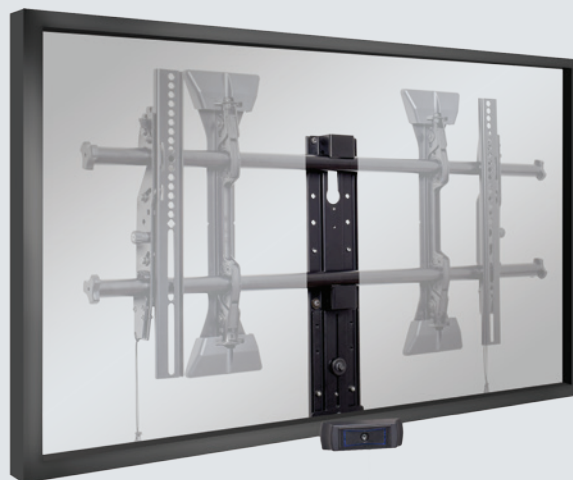

BELKIN USB HUB



USB 2.0 CABLE



BLACK BOX USB TO  
CAT5 EXTENDER



JABRA USB  
SPEAKERPHONE



FCA800V/810V/820V		Compatibility
ViewShare Video Conference Kits without Extender		Fusion Series cart, stand and wall mounts
Model	Display Sizes	Camera Placement
FCA800V	Large	Above/Below
FCA810V	XL	Above/Below
FCA820V	Large & XL	Center



FCA800VE/810VE/820VE		Compatibility
ViewShare Video Conference Kits with Extender		Fusion Series cart, stand and wall mounts
Model	Display Sizes	Camera Placement
FCA800VE	Large	Above/Below
FCA810VE	XL	Above/Below
FCA820VE	Large & XL	Center



## FUSION™ TILT MOUNT ACCESSORIES



FCA830/ FCA840		Compatibility
Center Channel Speaker Adapter		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Typical Screen Size	Weight Capacity
FCA830	52 - 80"	9.1 kg
FCA840	70 - 100"+	9.1 kg



FCA800/ FCA801		Compatibility
Above/Below Shelf, Large* Displays		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Size	Weight Capacity
FCA800	203 mm	9.1 kg
FCA801	355 mm	9.1 kg

\*Typical screen size: 46-70".



FCA831/ FCA841		Compatibility
Center Channel Speaker Adapter		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Typical Screen Size	Weight Capacity
FCA831	42 - 70"	4.5 kg/side
FCA841	50 - 95"	4.5 kg/side



FCA810/ FCA811		Compatibility
Above/Below Shelf, XL* Displays		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Size	Weight Capacity
FCA810	203 mm	9.1 kg
FCA811	355 mm	9.1 kg

\* Typical screen size: 70-100".



FCA112	Equipment Depth Range	Compatibility
Secure CPU/Media Player Adapter	0 - 41 mm	Large & Extra Large Fusion Wall Mounts



FCA820/ FCA821		Compatibility
Fusion Center Camera Shelf		Fusion Ceiling, Freestanding and Wall Mounts
Model	Size	Weight Capacity
FCA820	203 mm	9.1 kg
FCA821	355 mm	9.1 kg



FCA113		Compatibility
Extension Accessory for Behind-Mount Storage Space		All Fusion Wall Mounts



FCA802/FCA812		Compatibility
Component Shelf, Large Displays		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Typical Screen Size	Weight Capacity
FCA802	46 - 70"	9.1 kg
FCA812	70 - 100"	9.1 kg



FCK000/008/016		Compatibility
Connector Kits		Fusion Fixed & Tilt Wall Mounts
Model	Width	
FCK000	Adds zero length to the poles	
FCK008	203 mm	
FCK016	406 mm	



FCA106		Compatibility
Side Cover Accessory		Fusion Fixed & Tilt Wall Mounts



## THINSTALL™ TILT MOUNT

### FEATURES



#### ULTRA-LOW PROFILE

At less than the width of a penny, these mounts provide an ultra-thin profile to showcase any flat-screen display.



#### GLIDE LOCK

Tool-less latching with a sliding flag for fast installation.




#### CENTRIS LOW-PROFILE TILT

Uses the center of gravity to balance the screen while maintaining a low profile. The display stays set in place until readjusted.




#### CABLE KICKSTAND

A kickstand makes cable access hands-free while the open wall plate allows for easy electrical placement behind the display.



GLIDE LOCK™ LATCH



CABLE MANAGEMENT

## LTTU 37 - 80" ULTRA-LOW PROFILE



At 19 mm thick, this mount combines an ultra-thin profile with the functionality of 12 degrees of tilt.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Screen Thickness	Tilt
45.4 kg	548 x 907 x 19 mm	200 x 200 - 800 x 500 mm	51 mm	-12°



## MTTU 26 - 55" ULTRA-LOW PROFILE



Like the LTTU but it allows for different mounting patterns and both landscape and portrait screen orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Screen Thickness	Tilt
45.4 kg	448 x 706 x 19 mm	100 x 100 - 600 x 400 mm	51 mm	-12°



## OTHER TILT WALL MOUNTS

### MWCU 26 - 55" MOUNT WITH CPU STORAGE



Provides an all-in-one tilt wall mount solution for both a medium-sized flat panel display and CPU or receiver.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Equip Size (HxWxD)	Tilt
45.4 kg	303 x 487 x 114 mm	100 x 100 - 709 x 431 mm	356 x 478 x 97 mm	-15°



### FTRV 10 - 32" WALL MOUNT



A small option for flat panel displays or monitors that allows for portrait or landscape options with Q-Latch™ mounting system.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt
20.4 kg	142 x 141 x 46 mm	75 x 75 - 200 x 100 mm	+5°, -15°





## MENU BOARD DISPLAY WALL MOUNTS

### FUSION™ MENU BOARD MOUNT FEATURES



#### CONTROLZONE LEVELING

Post-installation fine-tuning of height and leveling up to  $\pm 25$  mm — 4x1 and 5x1 configurations include a floating center wall bracket.



#### LATERAL SHIFT

Wall brackets can be shifted around outlets and keep displays centered regardless of stud positioning.



#### INDEPENDENT DEPTH ADJUST

Independent depth adjust of 25 mm, from 147-173 mm, accommodates media players and cabling behind the displays and compensates for uneven walls.



#### CENTRIS TILT

Uses the center of gravity to balance the screen with a tilt range from 0-20 degrees and locking points at 0, 10 and 20 degrees.



#### ADD EXTENSION

FCAX accessories increase rail length for larger displays, up to 60".

LWM5X1U LANDSCAPE MENU BOARD



The largest of our wall-mounted menu boards, this configuration is five screens across with a floating third wall bracket. Fits 40 – 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt
56.7 kg	43 x 490 x 15 cm	any width x 100-400 mm	147-173 mm	20°



LWM4X1U LANDSCAPE MENU BOARD



A classic four-screen configuration with a floating third wall bracket. Fits 40 – 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt
56.7 kg	43 x 399 x 15 cm	any width x 100-400 mm	147-173 mm	20°



LWM3X1U LANDSCAPE MENU BOARD



This standard 3-screen configuration securely supports displays with just two mounting brackets. Fits 40 – 55" displays.


Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt
56.7 kg	43 x 276 x 15 cm	any width x 100-400 mm	147-173 mm	20°



**LWM3X1UP** PORTRAIT MENU BOARD

The portrait version of the LWM3x1U. Fits 40 – 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt
56.7 kg	43 x 175 x 15 cm	any width x 100-400 mm	147-173 mm	20°

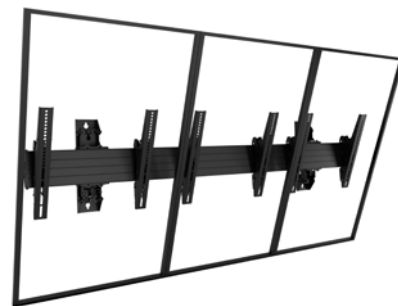**LWM2X1U** LANDSCAPE MENU BOARD

A smaller two-screen configuration for tighter spaces.

Fits 40 – 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt
56.7 kg	43 x 183 x 15 cm	any width x 100-400 mm	147-173 mm	20°

**LWM2X1UP** PORTRAIT MENU BOARD

The portrait version of the LWM2x1U. Fits 40 – 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Depth Adjust	Tilt
56.7 kg	43 x 119 x 15 cm	any width x 100-400 mm	147-173 mm	20°



# FUSION™ MENU BOARD DISPLAY WALL MOUNT

## ACCESSORIES



FCAX08/14/20		Compatibility
Video Wall Extension Brackets		Fusion Video Wall & Menu Board Ceiling and Wall Mounts
Model	Length	
FCAX08	203 mm	
FCAX14	356 mm	
FCAX20	508 mm	





## VIDEO WALL DISPLAY WALL MOUNTS

### CONNEXSYS™ VIDEO WALL SYSTEM FEATURES



#### SPEED LEVELING

Mount multiple units to a single strut channel for quick row leveling and centerless lateral shift.



#### POWERZONE™ ADJUSTMENTS

Six points of tool-free adjustment: height, depth, lateral and tilt are all found in one easy-to-access location. Rigid frame keeps displays where you set them even after extending for service.



#### RAPIDDRAW™ DISPLAY RELEASE

Cord release system gently and remotely pops any screen out 349 mm from the wall for easy access and service while minimizing aggressive screen pushes. Get an additional 20 degrees of bottom pull-out with an integrated kickstand. Cords can be set to release from any 90 degree angle.



#### GENEROUS DEPTH ADJUSTMENT


Mount depth from wall can be set between 102 and 186 mm for perfect alignment, accommodating for recess applications and wall imperfections.

**LVS1U** 42 - 80" LANDSCAPE SYSTEM WITH RAILS

This universal pop-out mount is ideal for large-scale, seamless video walls and recessed applications. Ships with rails for each mount.


Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust
68 kg	554 x 903 x 102 mm	200 x 100 - 700 x 400 mm*	+4° / -2.5°	± 25 mm	85 mm

\* Add FHB5050 interface adapter for compatibility with 800 x 400 mm mounting patterns.

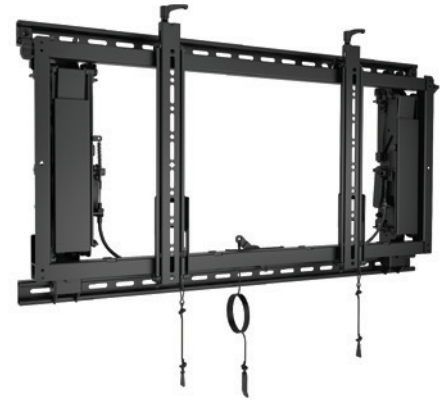**LVS1UP** 40 - 80" PORTRAIT SYSTEM WITH RAILS

The portrait version of the LVS1U that ships with rails for each mount.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust
68 kg	826 x 496 x 104 mm	200 x 100 - 800 x 400 mm	+4° / -2.5°	± 25 mm	85 mm

**LVSXU** 42 - 80" LANDSCAPE SYSTEM WITHOUT RAILS

Nearly identical to the LVS1U but ships without rails so installers can source strut locally to hang multiple mounts to one rail and reduce installation time.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust
68 kg	554 x 903 x 102 mm	200 x 100 - 700 x 400 mm*	+4° / -2.5°	± 25 mm	85 mm

\* Add FHB5050 interface adapter for compatibility with 800 x 400 mm mounting patterns.

**LVSXUP** 40 - 80" PORTRAIT SYSTEM WITHOUT RAILS

The portrait version of the LVSXU that also ships without rails.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Tilt	Height Adjust	Total Depth Adjust
68 kg	826 x 496 x 104 mm	200 x 100 - 800 x 400 mm	+4° / -2.5°	± 25 mm	85 mm



## CONNEXSYS VIDEO WALL SYSTEM ACCESSORIES



FHB5050	Dimensions*	Compatibility
800 x 400 mm Interface Adapter	432 x 120 x 16 mm	LVS1U, LVXSU

*\*Dimensions given are for one side of the two-piece FHB5050 bracket.*



CSA100	Dimensions	Compatibility
Device Holder	250 x 202 x 38 mm	All ConnexSys Mounts



CSACLIPS	Dimensions	Compatibility
Cable Quick Ties (Qty 100)	35 x 19 x 23 mm	All ConnexSys Mounts

## FUSION™ PULL-OUT FEATURES



**PULL-OUT EXTENSION**  
Mounts extend 178 mm for easy cable access and servicing in hard-to-reach installations.




**CONTROLZONE LEVELING**  
Post-installation fine-tuning of height and leveling ensures screen will be perfectly aligned.



**CENTERLESS SHIFT**  
Generous post-installation lateral shift allows screen to slide apart or together for easy maintenance and perfect alignment.



**CLICKCONNECT™**  
Tool-less latching makes an audible click when a Fusion mount is safely engaged with the screen.



CONTROLZONE™




CENTERLESS™ SHIFT

## LSMVU 37 - 63" PULL-OUT WALL MOUNT



Chief's most popular, micro-adjustable pull-out mount fits most displays to create seamless video walls up to 2x2.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Extension	Plumb Adjustment
68 kg	533 x 879 x 94 mm	200 x 200 - 760 x 505 mm	445 mm	272 mm	2.5°

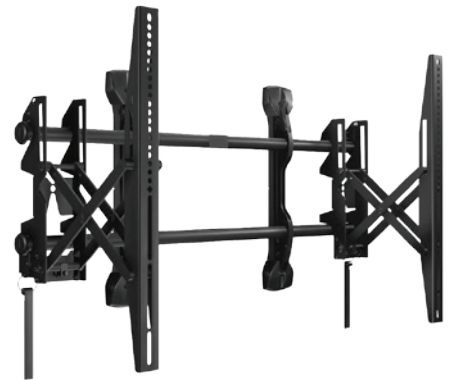

## LSMVPV PORTRAIT PULL-OUT WALL MOUNT



The portrait version of the popular LSMVU for 37-63" displays can be used to create video walls up to 2x2.


Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Extension	Plumb Adjustment
68 kg	826 x 523 x 94 mm	200 x 200 - 800 x 400 mm	102 mm	272 mm	2.5°



**MSMVU** 26 - 47" PULL-OUT WALL MOUNT

The smaller version of the LSMVU for shorter and/or narrower mounting patterns can be used to create video walls up to 2x2.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Extension	Plumb Adjustment
56.7 kg	419 x 648 x 94 mm	100 x 100 - 540 x 400 mm	368 mm	272 mm	2.5°

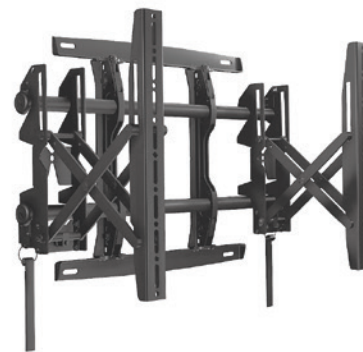**MSMVPU** PORTRAIT PULL-OUT WALL MOUNT

The portrait version of the popular MSMVU for 26 - 47" displays can be used to create video walls up to 2x2.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Lateral Shift	Extension	Plumb Adjustment
56.7 kg	620 x 523 x 94 mm	100 x 100 - 600 x 400 mm	254 mm	272 mm	2.5°



## FUSION™ PULL-OUT MOUNT

### ACCESSORIES



FCA112	Equipment Depth Range	Compatibility
Secure CPU/Media Player Adapter	0 - 41 mm	Large & Extra Large Fusion Wall Mounts





## SWING ARM DISPLAY WALL MOUNTS

### THINSTALL™ SWING ARM FEATURES



#### ULTRA-LOW PROFILE

These sleek designs retract down to 38 to 46 mm to provide an ultra-thin profile to showcase any flat-screen display.



#### CENTERLESS™ SHIFT

Generous post-installation lateral shift up to 406 mm allows for perfect display positioning.



#### CABLE MANAGEMENT

Enclosed, tool-less cable covers and a wide open wall plate make it easy to route power and signal cables.



#### CENTRIS™ FINGERTIP TILT

Uses the center of gravity to balance the screen for up to 15 degrees of easy tilt capability.



#### HEIGHT ADJUST

Adjust the height of the entire configuration post installation up to 25 mm.

## TS525TU 37 - 58" EXTENDS 635 mm



This feature-rich swing arm fits most screens and has a large array of supporting accessories.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
56.7 kg	527 x 749 x 38 mm	100 x 100 - 800 x 400 mm	635 mm	406 mm	-15°	25 mm



## TS325TU 26 - 52" EXTENDS 635 mm



Very similar to the TS525TU but with shorter wall plate and modified interface making it better suited for lighter displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
34 kg	439 x 749 x 46 mm	100 x 100 - 600 x 400 mm	635 mm	406 mm	-15°	25 mm



## TS318TU 26 - 52" EXTENDS 457 mm



This mount has the same features as the TS325TU with 457 mm extension.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
34 kg	439 x 574 x 46 mm	100 x 100 - 600 x 400 mm	457 mm	406 mm	-15°	25 mm



## TS318SU 26 - 52" EXTENDS 457 mm



This single stud version of the TS318 dual arm swing arm mount works well when lateral shift is not a necessity.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
34 kg	343 x 574 x 46 mm	100 x 100 - 600 x 400 mm	457 mm	N/A	-15°	25 mm



## TS218SU 26 - 47" EXTENDS 457 mm



This single stud swing arm works well in corners and with most medium flat panels. It also accommodates portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
34 kg	356 x 330 x 38 mm	100 x 100 - 400 x 400 mm	457 mm	N/A	-12°	25 mm



## TS118SU 10 - 32" EXTENDS 457 mm



Fits smaller patterns and screens than the TS218SU.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
15.9 kg	294 x 330 x 38 mm	75 x 75 - 200 x 200 mm	457 mm	N/A	-12°	N/A



## TS110SU 10 - 32" EXTENDS 250 mm



This basic swing arm wall mount provides single arm extension and swivel for smaller displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Height Adjust
15.9 kg	239 x 356 x 38 mm	75 x 75 - 200 x 200 mm	250 mm	N/A	-12°	N/A



## THININSTALL™ SWING ARM ACCESSORIES



TA100	Dimensions (WxD)	Weight Capacity	Compatibility
Component Shelf	457 x 305 mm	4.5 kg	TS525TU, TS325TU, TS318TU, TS318SU



TA200/250	Compatibility		
Video Conference Camera Shelves - Above	TS525TU, TS325TU, TS318TU, TS318SU		
Model	Dimensions (WxD)	Weight Capacity	
TA200	203 x 184 mm	4.5 kg	
TA250	305 x 184 mm	4.5 kg	



TA300	Weight Capacity	Compatibility
Left/Right Speaker Adapter	4.5 kg	TS525TU, TS325TU, TS318TU, TS318SU



TA350	Weight Capacity	Compatibility
Center Channel Speaker Adapter	4.5 kg	TS525TU, TS325TU, TS318TU, TS318SU



TA410	Compatibility	
Portrait Adapter	TS525TU, TS325TU, TS318TU, TS318SU	



PAC525	Dimensions (HxWxD)	Compatibility
Small Multi-Depth Wall Box	229 x 362 x 99 mm	All Chief Wall Mounts
Model	Includes Flange	
PAC525	No	
PAC525FW	Yes	



PAC526	Dimensions (HxWxD)	Compatibility
Large Multi-Depth Wall Box	362 x 362 x 99 mm	All Chief Wall Mounts
Model	Includes Flange	
PAC526	No	
PAC526FW	Yes	



PACUNV1	Dimensions (HxWxD)	Weight Capacity	Compatibility
Component Adapter Bracket	146 x 174 x 38 mm	4.5 kg	PAC525 & PAC526 In-wall Boxes

## OTHER SWING ARM MOUNTS

### PDRUB 42 - 80" EXTENDS UP TO 940 mm



The heavy-duty swing arm option works for displays up to 90.7 kg and extends up to 940 mm. Supports both portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Color
90.7 kg	56 x 100.3 x 8.6 cm	200 x 200 - 862 x 517 mm	940 mm	229 mm	+5°, -16°	<b>B</b>



### PNRUB 42 - 80" EXTENDS UP TO 635 mm



The smaller version of the PDR extends to 635 mm. Supports both portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Extension	Max Lateral Shift	Tilt	Color
90.7 kg	538 x 687 x 84 mm	200 x 200 - 862 x 517 mm	635 mm	229 mm	+5°, -17°	<b>B</b>




## OTHER SWING ARM MOUNT ACCESSORY



PAC715/PAC716		Compatibility
Video Conference Camera Shelves - Above or Below		PDR, PNR & Other Q-Latch Mounts
Model	Dimensions (WxD)	Weight Capacity
PAC715	229 x 223 mm	4.5 kg
PAC716	356 x 201 mm	4.5 kg



PACCS1	Compatibility
Large Accessory Shelf	PDR, PNR & Other Q-Latch Mounts



PAC400	Compatibility
P-Series Rotation Adapter	PDR, PNR & Other Q-Latch Mounts





## CEILING DISPLAY MOUNTS

### FUSION™ VIDEO WALL FEATURES



#### CONTROLZONE™ LEVELING

Allows for 51 mm of height adjustment at each mounting box plus 25 mm increments along each column.



#### INDEPENDENT ADJUSTMENT

Separate knobs for micro-height and plumb adjustment help to easily align displays without tools.



#### INFINITE SCREEN POSITIONING

Infinite vertical and lateral shift adjustments allow for tight display rows and columns.



#### CABLE MANAGEMENT

FCACLIPS can be added at any point along the crossbars to create anchor points for easy cable management.



#### ADD EXTENSION

FCAX accessories increase rail length for larger displays, up to 152 cm.



INDEPENDENT  
ADJUSTMENT




INFINITE SCREEN  
POSITIONING



**LCM3X3U** LANDSCAPE VIDEO WALL


The landscape 3 wide x 3 tall configuration can be combined with other ceiling mounts to create longer walls. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Manual Height Adjust	Micro Height Adjust
38.5 kg	1996 x 2763 x 368 mm	Any width x 100 - 400 mm	25 mm	51 mm

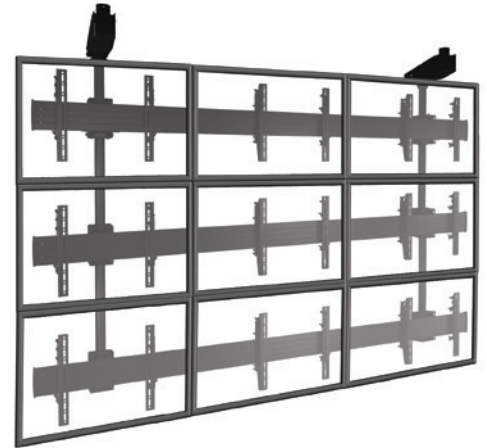**LCM3X2U** LANDSCAPE VIDEO WALL

Create video walls in landscape orientation 3 wide x 2 tall. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Manual Height Adjust	Micro Height Adjust
56.7 kg	1389 x 2766 x 368 mm	Any width x 100 - 400 mm	25 mm	51 mm

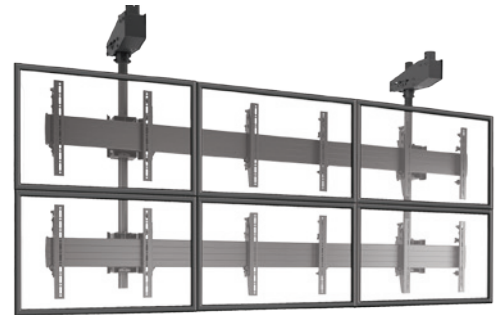**LCM3X2UP** PORTRAIT VIDEO WALL

A portrait version to mount video walls 3 wide x 2 tall. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Manual Height Adjust	Micro Height Adjust
56.7 kg	1996 x 1748 x 368 mm	100 - 800 mm x Any Height	25 mm	51 mm




LCM2X2U LANDSCAPE VIDEO WALL



The versatile and popular landscape 2 wide x 2 tall configuration fits well in most digital signage applications. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Manual Height Adjust	Micro Height Adjust
56.7 kg	1389 x 1851 x 368 mm	Any width x 100 - 400 mm	25 mm	51 mm

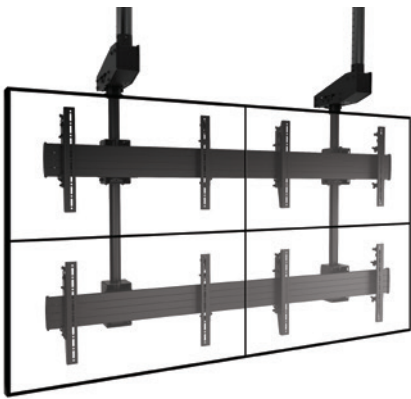

LCM2X2UP PORTRAIT VIDEO WALL



A portrait version to mount video walls 2 wide x 2 tall. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Manual Height Adjust	Micro Height Adjust
56.7 kg	1996 x 1189 x 368 mm	100 - 800 mm x Any Height	25 mm	51 mm



## FUSION™ MENU BOARD FEATURES



**CONTROLZONE™ LEVELING**  
Allows for 51 mm of height adjustment at each mounting box.



**CENTRIS™ TILT TECHNOLOGY**  
Screens stay where you place them for effortless multi-screen alignment.



**TOOL-FREE SCREEN ENGAGEMENT**  
Easily place screens and add optional padlock security.



**LATERAL SHIFT**  
Post-installation lateral shift allows screens to slide apart or together for easy maintenance and perfect alignment.



**ADD EXTENSION**  
FCAX accessories increase rail length for larger displays, up to 152 cm.



CONTROLZONE  
LEVELING




CENTRIS TILT  
TECHNOLOGY

## LCM3X1U LANDSCAPE MENU BOARD



This classic menu board configuration is three screens across. Create longer menu boards by combining mounts. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
56.7 kg	425 x 2766 x 201 mm	Any width x 100 - 400 mm	51 mm	+5°, -20°

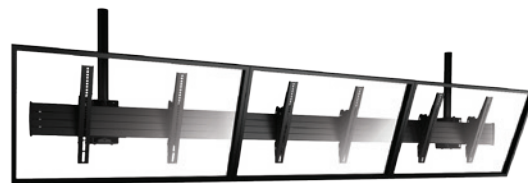


## LCM3X1UP PORTRAIT MENU BOARD



The portrait of the LCM3X1U. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
56.7 kg	826 x 1750 x 201 mm	100 - 800 mm x Any Height	51 mm	+5°, -20°

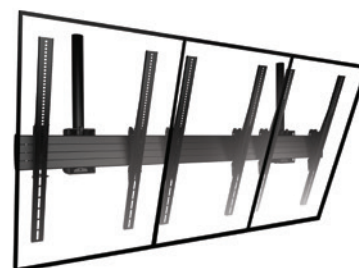


LCB3X1U BACK-TO-BACK LANDSCAPE



Mount three screens back-to-back in landscape orientation for six total screens. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
56.7 kg	425 x 2763 x 292 mm	Any width x 100 - 400 mm	51 mm	+5°, -20°

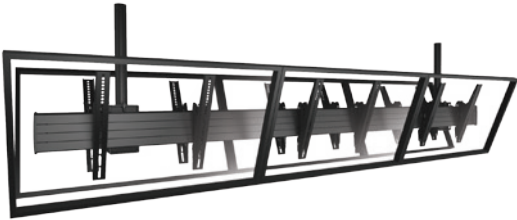


LCB3X1UP BACK-TO-BACK PORTRAIT



The portrait version of the LCB3X1U. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
56.7 kg	826 x 1748 x 292 mm	100 - 800 mm x Any Height	51 mm	+5°, -20°

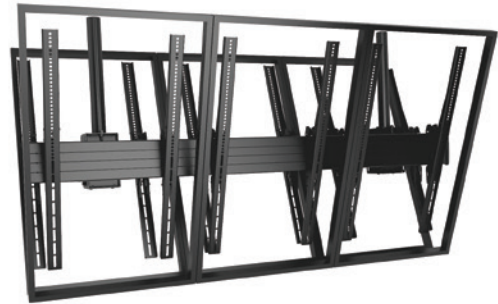


LCM2X1U LANDSCAPE MENU BOARD



This classic menu board configuration is two screens across. Create longer menu boards by combining mounts. Fits 40 - 55" displays.


Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
56.7 kg	427 x 1851 x 201 mm	Any width x 100 - 400 mm	N/A	+5°, -20°

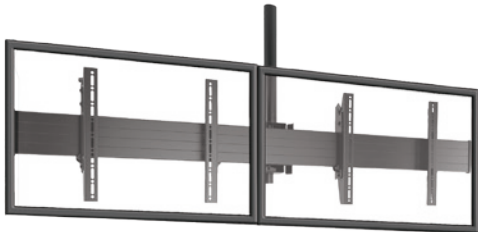

**LCM2X1UP** PORTRAIT MENU BOARD


The portrait version of the LCM2X1U. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
56.7 kg	826 x 1190 x 201 mm	100 - 800 mm x Any Height	N/A	+5°, -20°

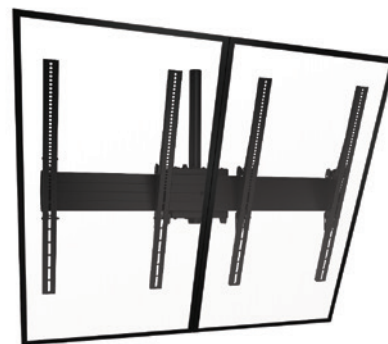**LCB2X1U** BACK-TO-BACK LANDSCAPE


Mount two screens back-to-back in landscape orientation for four total screens. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
45.4 kg	425 x 1851 x 296 mm	Any width x 100 - 400 mm	N/A	+5°, -20°

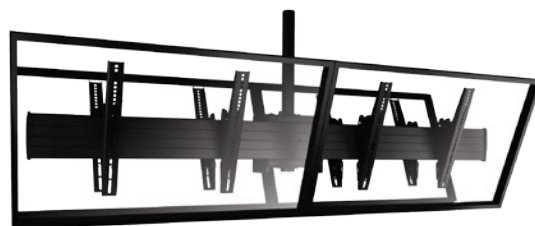**LCB2X1UP** BACK-TO-BACK PORTRAIT

The portrait version of the LCB2X1U. Fits 40 - 55" displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Micro Height Adjust	Tilt
45.4 kg	826 x 1190 x 296 mm	100 - 800 mm x Any Height	N/A	+5°, -20°

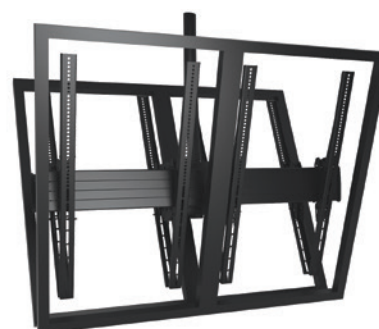

## FUSION™ CEILING MOUNTS

### FEATURES



#### CENTRIS™ TILT TECHNOLOGY

Provides a continuous range of fingertip tilt from +5 to -20 degrees with four set locking points at 0, 5, 10 and 15 degrees to eliminate guess work when adjusting multiple screens.



#### ON/OFF COLUMN CONNECTION

Simple connection for ease of installation and service, particularly when installing in tight corners or near walls.



#### TOOL-FREE SCREEN ENGAGEMENT

Easily place screens and add optional padlock security.



#### FLEXIBILITY

Mount swivels to any preferred viewing angle before locking down with set screws.

### XCM7000 60 - 98" HEAVY-DUTY MOUNT



Dual pole drop provides needed support for single extra large and deep flat panel displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)*	Tilt	Roll Adjust
136 kg	425 x 884 x 203 mm	800 x 400 mm	+7.5° / -20°	2" total height adjust at each head assembly

*\*Interface adapters for larger mounting hole patterns are available, please contact your customer service team for the correct part codes and to verify compatibility.*



### XCB7000 60 - 90" BACK-TO-BACK HEAVY-DUTY MOUNT



Dual pole drop provides needed support for back-to-back configurations of extra large and deep flat panel displays.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)*	Tilt	Roll Adjust
136 kg	425 x 884 x 300 mm	800 x 400 mm	+7.5° / -20°	2" total height adjust at each head assembly

*\*Interface adapters for larger mounting hole patterns are available, please contact your customer service team for the correct part codes and to verify compatibility.*






**XCM1U** 60 - 90" LANDSCAPE CEILING MOUNT**XL**

For heavier displays with wider mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)*	Tilt	Roll Adjust
113.4 kg	425 x 884 x 201 mm	200 x 100 - 800 x 400 mm	+5°, -20°	±3°


*\*Interface adapters for larger mounting hole patterns are available, please contact your customer service team for the correct part codes and to verify compatibility.*

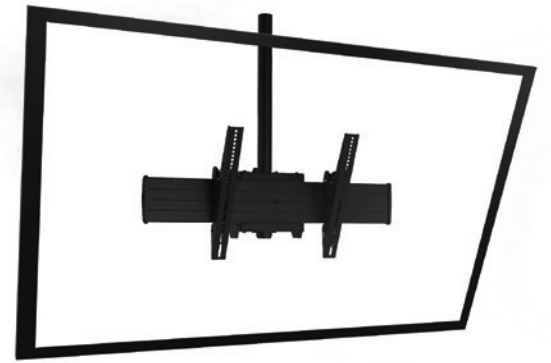**XCB1U** 60 - 90" BACK-TO-BACK LANDSCAPE MOUNT**XL**

Back-to-back version of the XCM1U to mount two displays with wider mounting patterns.


Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)*	Tilt	Roll Adjust
90.7 kg	425 x 884 x 296 mm	200 x 100 - 800 x 400 mm	+5°, -20° for screens up to 38.8" tall	±3°

*\*Interface adapters for larger mounting hole patterns are available, please contact your customer service team for the correct part codes and to verify compatibility.*

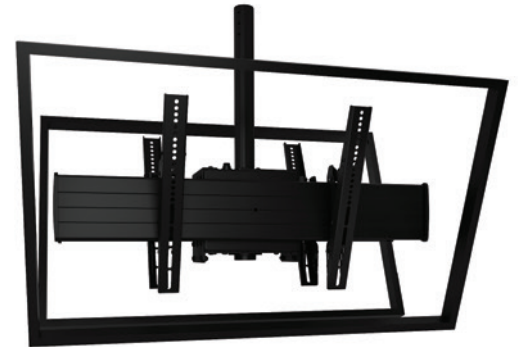**LCM1U** LANDSCAPE CEILING MOUNT**L**

Our most popular, feature-packed and versatile single ceiling mount fits most 32 - 60" displays. Add another for stacked configurations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	420 x 681 x 162 mm	200 x 100 - 616 x 400 mm	+5°, -20°	±3°	<b>B</b>

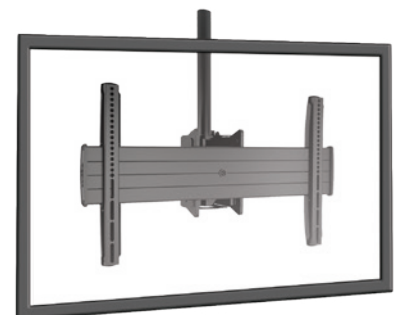

LCM1UP PORTRAIT CEILING MOUNT



The portrait version of the LCM1U. Fits 32 - 60" displays.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	826 x 529 x 162 mm	200 x 100 - 460 x 800 mm	+5°, -20°	±3°	<b>S</b> <b>B</b>




LCB1U BACK-TO-BACK LANDSCAPE MOUNT



The back-to-back version of the LCM1U for two total screens in a landscape configuration. Fits 32 - 60" displays.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	420 x 681 x 259 mm	200 x 100 - 616 x 400 mm	+5°, -20°	±3°	<b>B</b>

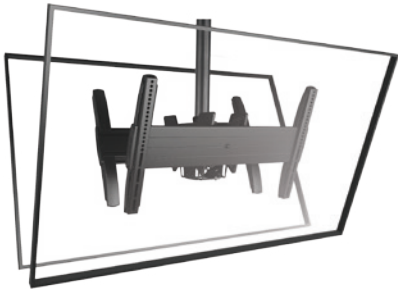

LCB1UP BACK-TO-BACK PORTRAIT MOUNT



The portrait version of the LCB1U. Fits 32 - 60" displays.


Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	826 x 529 x 259 mm	200 x 100 - 460 x 800 mm	+5°, -20°	±3°	<b>B</b>



**LCM1X2U** 32 - 60" STACKED LANDSCAPE

This solution includes two LCM1U mounts and a 121.9 cm perforated CPA column for stacking two screens on the same column.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	420 x 681 x 162 mm	200 x 100 - 616 x 400 mm	+5°, -20°	±3°	<b>B</b>

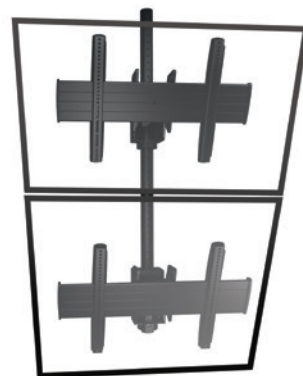**LCB1X2U** 32 - 60" BACK-TO-BACK STACKED


The back-to-back version of the LCM1x2U stacks two screens per side for four total screens and a 121.9 cm perforated CPA column.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
45.3 kg	420 x 681 x 259 mm	200 x 100 - 616 x 400 mm	+5°, -20°	±3°	<b>B</b>

**LCM4U** 32 - 65" QUAD MOUNT


Allows four screens to be installed on a single column drop for 360° viewing capabilities. Comes with Fusion interfaces.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
38 kg	475 x 1422 x 1422 mm	200 x 200 - 600 x 400 mm	+5°, -20°	±3°	<b>B</b>

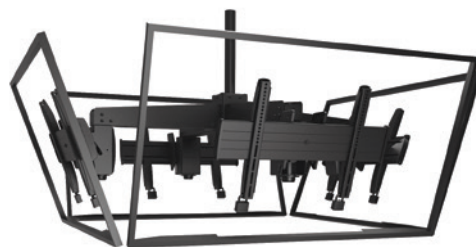**LCM3U** 32 - 65" TRIPLE MOUNT

Allows three screens to be installed on a single column drop for 360° viewing capabilities. Comes with Fusion interfaces.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
57 kg	462 x 1184 x 1184 mm	200 x 200 - 600 x 400 mm	+5°, -20°	±3°	<b>B</b>

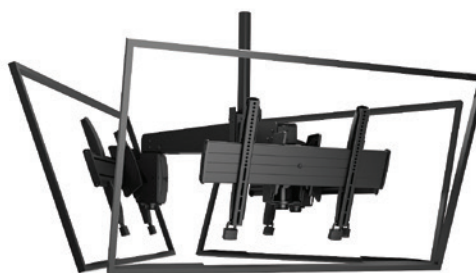

## MCM1U 26 - 50" CEILING MOUNT



The medium version of the LCM1U accommodates smaller mounting patterns as well as portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	420 x 529 x 162 mm	200 x 100 - 460 x 400 mm	+5°, -20°	±3°	<b>B</b>



## MCB1U 26 - 50" BACK-TO-BACK LANDSCAPE



Back-to-back version of the MCM1U for two total screens in landscape or portrait configurations. Fits 26 - 50" displays.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	419 x 529 x 259 mm	200 x 100 - 460 x 400 mm	+5°, -20°	±3°	<b>B</b>



## MCM1X2U 26 - 50" STACKED LANDSCAPE



Stacked solution includes two MCM1U mounts and a 121.9 cm perforated CPA in a 1 wide x 2 tall configuration.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
56.7 kg	419 x 529 x 162 mm	200 x 100 - 460 x 400 mm	+5°, -20°	±3°	<b>B</b>



## MCB1X2U 26 - 50" BACK-TO-BACK STACKED



Back-to-back version of the MCM1x2U stacks two screens per side for four total screens and a 121.9 cm perforated CPA column.

Weight Capacity (per screen)	Dimensions per mount (HxWxD)	Mounting Patterns (W,H)	Tilt	Roll Adjust	Color
45.3 kg	420 x 529 x 259 mm	200 x 100 - 460 x 400 mm	+5°, -20°	±3°	<b>B</b>



## FUSION™ VIDEO WALL, MENU BOARD & CEILING MOUNT ACCESSORIES



FCAX08/14/20		Compatibility
Video Wall Extension Brackets		Fusion Video Wall & Menu Board Ceiling Mounts
Model	Length	
FCAX08	203 mm	
FCAX14	356 mm	
FCAX20	508 mm	



FCA810/ FCA811		Compatibility
Above/Below Shelf, XL* Displays		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Size	Weight Capacity
FCA810	203 mm	9.1 kg
FCA811	355 mm	9.1 kg

\* Typical screen size: 70-100".



FCAC	Compatibility
Menu Board Connector*	Fusion Ceiling-Mounted Menu Boards

\* For alignment and aesthetics only - not for bearing load.



FCA3U	Compatibility
Triple Ceiling Mount Adapter	Allows for integration of different mount heads like the LCM1U, MCM1U, RLC1, RMC1 and JHS mounts



FCA820/ FCA821		Compatibility
Fusion Center Camera Shelf		Fusion Ceiling, Freestanding and Wall Mounts
Model	Size	Weight Capacity
FCA820	203 mm	9.1 kg
FCA821	355 mm	9.1 kg



FCA4U	Compatibility
Quad Ceiling Mount Adapter	Allows for integration of different mount heads like the LCM1U, MCM1U, RLC1, RMC1 and JHS mounts



FCA802/ FCA812		Compatibility
Fusion Lower Component Shelf		All Fusion Series Mounts
Model	Size	Weight Capacity
FCA802	Large Displays	9.1 kg
FCA812	XL Displays	9.1 kg



FCA800/ FCA801		Compatibility
Above/Below Shelf, Large* Displays		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Size	Weight Capacity
FCA800	203 mm	9.1 kg
FCA801	355 mm	9.1 kg

\*Typical screen size: 46-70".



FCA510/515		Compatibility
Storage Accessories		All Fusion Ceiling & Freestanding Mounts
Model	Dimensions (HxWxD)	
FCA510	267 x 267 x 76 mm	
FCA515	394 x 394 x 114 mm	



FCA520	Max Equipment Depth	Compatibility
Universal Clamp Kit (Qty 2)	83 mm	All Fusion Ceiling & Freestanding Mounts

## FUSION™ VIDEO WALL, MENU BOARD & CEILING MOUNT ACCESSORIES



FCA830/ FCA840		Compatibility
Center Channel Speaker Adapter		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Typical Screen Size	Weight Capacity
FCA830	52 - 80"	9.1 kg
FCA840	70 - 100"+	9.1 kg



FCA831/ FCA841		Compatibility
Center Channel Speaker Adapter		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Typical Screen Size	Weight Capacity
FCA831	42 - 70"	4.5 kg/side
FCA841	50 - 95"	4.5 kg/side



FCACLIPS	Compatibility
Anchor Points for Zip Ties (Qty 10)	All Fusion Ceiling & Freestanding Mounts



## CPA PIN CONNECTION ACCESSORIES



CPA330	Weight Capacity
CPA Offset Ceiling Plate	226.8 kg



CPA395	Weight Capacity
CPA Angled Ceiling Plate	226.8 kg



CPA365	Weight Capacity
CPA Truss Adapter	226.8 kg



CPA262	Weight Capacity
CPA to NPT Column Connection Adapter (contains male 1-1/2" NPT threads and accepts Chief CPA columns)	226.8 kg
Model	Color
CPA262	<b>B</b> (shown)
CPA262S	<b>S</b>



CPA263	Weight Capacity
CPA column to CPA column connector	226.8 kg



CPA264	Weight Capacity
NPT to CPA Column Connection Adapter (contains female 1-1/2" NPT threads and accepts Chief's CPA columns)	226.8 kg



CPA Columns	Weight Capacity
Fixed, pin-connection extension columns available in black, silver and white†	226.8 kg
Model	Length
CPAE030	300 mm
CPAE080	800 mm
CPAE100	1000 mm
CPAE150	1500 mm
CPAE300	3000 mm
† All part numbers listed are black. To order alternate colors add a W (white) to the end of the part number.	



CMA274	Compatibility
Quick-Snap Cable Cover	CPA Columns



CMA275	Compatibility
Quick-Snap Cable Covers (3 pack)	CPA Columns



## AUTOMATED CEILING LIFT FEATURES



### CONTROL OPTIONS

Multiple control option include serial communication, dry contact control and IR remote (included).



### SMOOTH EXTENSION

Fast and quiet travel at more than 51 mm per second with preset viewing positions.



### CLICKCONNECT™

Hear an audible click when the screen engages with the mount. Easy to connect/disconnect - no tools needed!



### CABLE MANAGEMENT

Unique cable management system allows cables to move freely with the lift.



CONTROL OPTIONS



SMOOTH EXTENSION

## CM2C40UI 32 - 61" CEILING LIFT



Chief's automated ceiling lift with multiple control options including serial communication, dry contact control and IR remote.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Max Extension	Overall Travel	Compatibility
86.2 kg	794 x 603 x 197 mm	200 x 200 - 862 x 517 mm	1800 mm	1020 mm	230VAC, 50Hz



## OTHER CEILING, TRUSS & POLE MOUNTS

### TPSU 42 - 71" FIXED TRUSS & POLE MOUNT



This fixed solution for truss and pole mounting supports portrait and landscape orientations with the Q-Latch™ mounting system.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Truss Systems	Orientation
68 kg	412 x 433 x 27 mm	200 x 200 - 862 x 517 mm	356 mm (OD)	Landscape, Portrait



### TPMU 42 - 71" TILT POLE MOUNT



Mounts to poles with multiple tilt adjustment options along with portrait and landscape orientations with Q-Latch™ mounting system.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Tilt	Tilt Locking Points	Orientation
68 kg	412 x 433 x 86 mm	200 x 200 - 862 x 517 mm	+5°, -15°	0°, 5°, 10° and 15°	Landscape, Portrait



### JPPU 26 - 45" PIVOT/TILT POLE MOUNT



Pole clamp supports portrait and landscape orientations with Centris™ fingertip tilt in all directions.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Pivot/ Tilt	Pole Diameter	Color
34 kg	189 x 152 x 89 mm	100 x 100 - 400 x 400 mm	±15°	38 - 51 mm	<b>S</b> <b>B</b>



### KOP100B SINGLE MONITOR POLE MOUNT



Easily attaches a monitor to a pole and provides smooth pivot and tilt adjustment.

Column Diameter Range	Weight Capacity	Mounting Patterns (W,H)	Tilt	Min. Depth From Pole	Typical Screen Size	Color
38 - 48 mm	18.14 kg	75 x 75 - 100 x 100 mm	+75°, -10°	66 mm	10 - 30"	<b>B</b>



## OTHER CEILING MOUNT ACCESSORIES



PAC715/716		Compatibility
Video Conferencing Camera Shelves - Above or Below		TPS, TPM, TPP & Other Q-Latch Mounts
Model	Dimensions (WxD)	Weight Capacity
PAC715	229 x 223 mm	4.5 kg
PAC716	356 x 301 mm	4.5 kg



IR10	Compatibility
Infrared Remote Control	CM2C40, CM2L40



PAC102	Compatibility
Component Pole Shelf	1-1/2" NPT and CPA Columns



# FREESTANDING DISPLAY MOUNTS

## FUSION™ VIDEO WALL FEATURES



### INDEPENDENT, TOOL-FREE ADJUSTMENT

Separate knobs for micro-height and plumb adjustment help to easily align displays without tools.



### CONTINUOUS ADJUSTMENT

Continuous vertical and lateral adjustments allow for tight display rows and columns.



### CABLE MANAGEMENT

FCACLIPS can be added at any point along the crossbars to create anchor points for easy cable management.



### INSTALLATION OPTIONS

Configurations come in cart or bolt-down applications to meet temporary or permanent signage needs.



### ADD EXTENSION

FCAX accessories increase rail length for larger displays, up to 60" (152 cm).




INDEPENDENT  
ADJUSTMENT



**LVM3X3U** 42 - 46" LANDSCAPE CART


The landscape-oriented, 3 wide x 3 tall configuration with smooth rolling casters for large, temporary video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
45.4 kg	2350 x 2743 x 1026 mm	Any Width x 100 - 400 mm	19 mm	19 mm

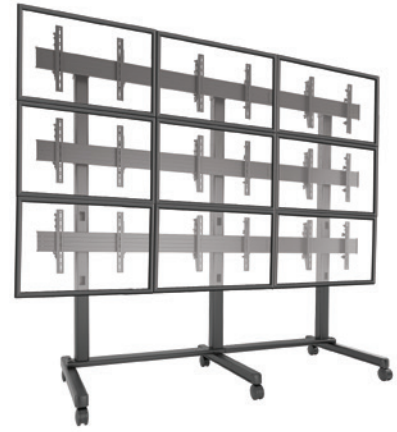**LBM3X3U** 42 - 46" LANDSCAPE BOLT-DOWN


The landscape-oriented, 3 wide x 3 tall configuration for large, bolt-down video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
45.4 kg	2310 x 2763 x 239 mm	Any Width x 100 - 400 mm	19 mm	19 mm

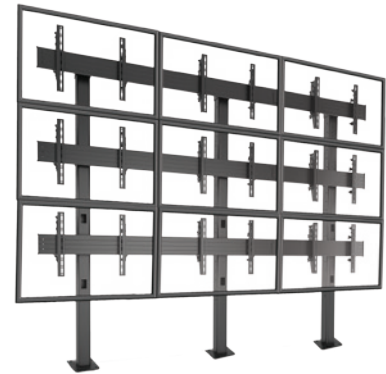**LVM3X2U** 42 - 46" LANDSCAPE CART

The landscape-oriented, 3 wide x 2 tall configuration with smooth rolling casters for large, temporary video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	1893 x 2743 x 1026 mm	Any Width x 100 - 400 mm	19 mm	19 mm

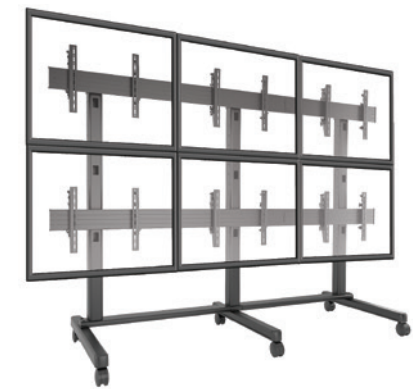**LVM3X2UP** 42 - 46" PORTRAIT CART

The portrait version of the LVM3X2U.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
45.4 kg	2710 x 1727 x 1026 mm	100 - 800 mm x Any Height	19 mm	19 mm






**LBM3X2U** 42 - 46" LANDSCAPE BOLT-DOWN

The landscape-oriented, 3 wide x 2 tall configuration for large, bolt-down video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	1852 x 2766 x 239 mm*	Any Width x 100 - 400 mm	19 mm	19 mm

\* Height is increased with FCABX accessories.

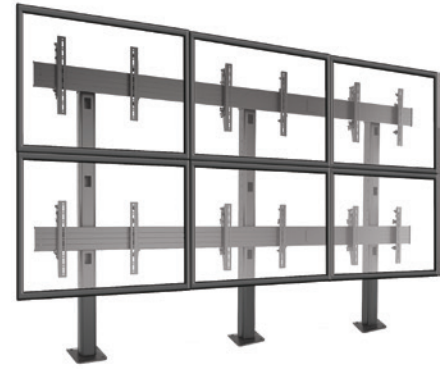**LBM3X2UP** 42 - 46" PORTRAIT BOLT-DOWN

The portrait version of the LBM3X2U.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
45.4 kg	2504 x 1727 x 244 mm*	100 - 800 mm x Any Height	19 mm	19 mm

\* Height is increased with FCABX accessories.

**LVM3X1UP** 42 - 46" PORTRAIT CART

The portrait-oriented, 3 wide x 1 tall configuration with smooth rolling casters for temporary menu boards.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	2253 x 1727 x 1026 mm	100 - 800 mm x Any Height	19 mm	19 mm

**LBM3X1UP** 42 - 46" PORTRAIT BOLT-DOWN

The portrait-oriented, 3 wide x 1 tall configuration for bolt-down menu boards.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	2047 x 1727 x 244 mm*	100 - 800 mm x Any Height	19 mm	19 mm


\* Height is increased with FCABX accessories.



**LBM1X3U** 42 - 65" LANDSCAPE BOLT-DOWN

Landscape-oriented, 1 wide x 3 tall configuration ideal for retail environments.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	2145 x 914 x 191 mm	100 x 100 mm - 900 x 400 mm	19 mm	19 mm

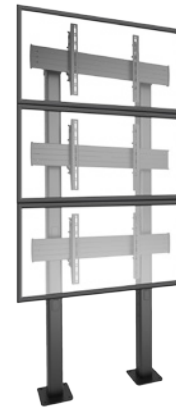**LVM2X2U** 42 - 50" LANDSCAPE CART

Our top performing, landscape-oriented, 2 wide x 2 tall configuration with smooth rolling casters for large, temporary video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	2045 x 1842 x 1026 mm	Any Width x 100 - 400 mm	19 mm	19 mm

**LVM2X2UP** 42 - 50" PORTRAIT CART

The portrait version of the LVM2X2U.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
45.4 kg	2710 x 1168 x 1026 mm	100 - 800 mm x Any Height	19 mm	19 mm

**LBM2X2U** 42 - 50" LANDSCAPE BOLT-DOWN

The landscape-oriented, 2 wide x 2 tall configuration for bolt-down video walls.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	1852 x 1852 x 239 mm*	Any Width x 100 - 400 mm	19 mm	19 mm

\* Height is increased with FCABX accessories.



**LBM2X2UP** 42 - 50" PORTRAIT BOLT-DOWN

The portrait version of the LBM2X2U.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
45.4 kg	2504 x 1168 x 240 mm*	100 - 800 mm x Any Height	19 mm	19 mm

\* Height is increased with FCABX accessories.

**LBM1X2U** 42 - 80" LANDSCAPE BOLT-DOWN

Landscape-oriented, 1 wide x 2 tall configuration ideal for retail environments.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	1689 x 914 x 191 mm	100 x 100 mm - 900 x 400 mm	19 mm	19 mm

**LBM1X2UP** 42 - 80" PORTRAIT BOLT-DOWN

Portrait-oriented, 1 wide x 2 tall configuration ideal for retail environments.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
56.7 kg	2145 x 914 x 191 mm	100 x 100 mm - 800 x 900 mm	19 mm	19 mm

**XBM1U** 42 - 80" LANDSCAPE BOLT-DOWN

Landscape-oriented, single screen configuration for securing XL displays in prominent locations. .

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)*	Height Adjust (per screen)	Plumb Adjust
113 kg	2143 x 914 x 191 mm	100 x 100 mm - 900 x 400 mm	19 mm	19 mm

\*Interface adapters for larger mounting hole patterns are available, please contact your customer service team for the correct part codes and to verify compatibility.



**XBM1UP** 42 - 80" PORTRAIT BOLT-DOWN



Portrait-oriented, single screen configuration for securing XL displays in prominent locations.

Weight Capacity (per screen)	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust (per screen)	Plumb Adjust
113 kg	2083 x 914 x 191 mm	100 x 100 mm - 800 x 900 mm	19 mm	19 mm



## FUSION™ VIDEO WALL ACCESSORIES

**60"**  
OPTION


FCAX08/14/20		Compatibility
Video Wall Extension Brackets		Fusion Video Wall & Menu Board Ceiling Mounts
Model	Length	
FCAX08	203 mm	
FCAX14	356 mm	
FCAX20	508 mm	



FCA800/ FCA801		Compatibility
Above/Below Shelf, Large* Displays		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Size	Weight Capacity
FCA800	203 mm	9.1 kg
FCA801	355 mm	9.1 kg

\*Typical screen size: 46-70".



FCA810/ FCA811		Compatibility
Above/Below Shelf, XL* Displays		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Size	Weight Capacity
FCA810	203 mm	9.1 kg
FCA811	355 mm	9.1 kg

\* Typical screen size: 70-100".



FCA820/ FCA821		Compatibility
Fusion Center Camera Shelf		Fusion Ceiling, Freestanding and Wall Mounts
Model	Size	Weight Capacity
FCA820	203 mm	9.1 kg
FCA821	355 mm	9.1 kg

\* Available spring, 2015.



FCA510/515		Compatibility
Storage Accessories		All Fusion Ceiling & Freestanding Mounts
Model	Dimensions (HxWxD)	
FCA510	267 x 267 x 76 mm	
FCA515	394 x 394 x 114 mm	



FCA520	Max Equipment Depth	Compatibility
Universal Clamp Kit (Qty 2)	83 mm	All Fusion Ceiling & Freestanding Mounts



FCA2X1U		Compatibility
LVM & LBM 2x1 Accessory		LVM2X2U, LBM2X2U



FCA3X1U		Compatibility
LVM & LBM 3x1 Accessory		LVM3X2U, LBM3X2U



FCABX18		Compatibility
Fusion LBM Video Wall Height Extensions - 457 mm (18")		Fusion LBM Bolt-Down Mounts



FCABX36		Compatibility
Fusion LBM Video Wall Height Extensions - 914 mm (36")		Fusion LBM Bolt-Down Mounts



FCA802/ FCA812		Compatibility
Component Shelf, Large and XL Displays		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Typical Screen Size	Weight Capacity
FCA802	46 - 70"	9.1 kg
FCA812	70 - 100"	9.1 kg

## FUSION™ VIDEO WALL ACCESSORIES



FCA830/ FCA840+		Compatibility
Center Channel Speaker Adapter		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Typical Screen Size	Weight Capacity
FCA830	52 - 80"	9.1 kg
FCA840	70 - 100"+	9.1 kg



FCA831/ FCA841+		Compatibility
Center Channel Speaker Adapter		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Typical Screen Size	Weight Capacity
FCA831	42 - 70"	4.5 kg/side
FCA841	50 - 95"	4.5 kg/side



FCACLIPS	Compatibility
Cable Quick Ties (Qty 10)	All Fusion Ceiling & Freestanding Mounts



FCA776	Compatibility
LVM Leveling Feet	Fusion LVM Video Wall Mounts



## FUSION™ CARTS & STANDS

### FEATURES



#### HEIGHT ADJUST

Turn knob allows a single user to raise or lower the viewing height of the screen by hand or power drill.



#### CABLE MANAGEMENT

Flexible cable covers allow access at any point along the column while concealing cables for a clean installation.



#### CUSTOMIZABLE

A host of available accessories allows for customized solutions to meet any need.



#### LOCKING CASTORS

Smooth rolling and lockable castors make transportation and positioning easy.

### XVAU 37 - 70" VIDEO CONFERENCE CART



Aesthetically designed cart with two-toned finish ships fully assembled with 11 RUs of storage space for rack mountable and non-rack mountable AV components. Dual display adapter available, see page 93.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (WxH)	Center of Display to Floor Range	Tilt	Color
113 kg	1395 x 986 x 737 mm	200 x 200 - 800 x 400 mm	1064 - 1280 mm	±2.5°	



### XPAU 55 - 100"+ HEAVY-DUTY CART



Includes a built-in 2U rack space for AV equipment while supporting heavy displays up to 136 kg. Great for video conferencing when used with the dual display accessory. Dual display adapter available, see page 93.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)*	Center of Display to Floor Range	Tilt	Color
136 kg	1877 x 1472 x 878 mm	200 x 200 - 800 x 400 mm	1213 - 1662 mm	±5°	

\*Interface adapters for larger mounting hole patterns are available, please contact your customer service team for the correct part codes and to verify compatibility.



**LPAU** 40 - 80" HEIGHT-ADJUSTABLE CART

This popular, aesthetically designed cart works well in classrooms and corporate environments.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Color
90.7 kg	1801 x 1143 x 844 mm	200 x 200 - 800 x 400 mm	1271 x 1779 mm	±5°	<b>S</b> <b>B</b>

**LFAU** 40 - 80" HEIGHT-ADJUSTABLE STAND

The stand version of the LPAU for semi-permanent installations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust	Tilt	Color
90.7 kg	1839 x 968 x 777 mm	200 x 200 - 800 x 400 mm	1130 - 1640 mm	±5°	<b>S</b> <b>B</b>

**MPAU** 37 - 55" HEIGHT-ADJUSTABLE CART

A smaller version of the LPAU for narrower and shorter mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Color
56.7 kg	1979 x 1214 x 813 mm	200 x 100 - 600 x 400 mm	1270 - 1770 mm	±5°	<b>S</b> <b>B</b>

**MFAU** 37 - 55" HEIGHT-ADJUSTABLE STAND

A smaller version of the LFAU for narrower and shorter mounting patterns.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Color
56.7 kg	1839 x 968 x 777 mm	200 x 100 - 600 x 400 mm	1130 - 1630 mm	±5°	<b>S</b> <b>B</b>



## VIEWSHARE VIDEO CONFERENCING KITS

### FEATURES & SPECIFICATIONS

#### FLEXIBLE PLACEMENT

HD camera can be installed above, below or between displays.

#### EASY CONNECTIVITY

ViewShare is fast and easy to setup using familiar USB connectivity, simplifying adoption for end users.

#### PEER-TO-PEER SOFTWARE

ViewShare's components are Skype™ for Business Certified, and optimized for Lync™ and Skype.

#### THE RIGHT SIZED SOLUTION

ViewShare kits are available with and without a USB to CAT5 extender to suite a variety of room sizes. For huddle spaces and small conference rooms order the FCA800V, FCA810V or FCA820V. For larger conference rooms order the FCA800VE, FCA810VE or FCA820VE.

#### WHAT'S INCLUDED?

- Mount accessory with integrated HD camera (Logitech C930E)
- USB 2.0 type A cable (305 mm)
- Belkin® powered USB hub
- Jabra® 410MS USB speakerphone
- Black Box® USB to CAT5 extender with power supply (on E models only)

#### SYSTEM REQUIREMENTS

- Windows 7 or 8
- Mac OSX 10.7 or higher
- 2.4 GHz Dual Core processor or better
- 2 GB RAM or more
- USB 2.0 port (USB 3.0 ready)



BELKIN USB HUB



USB 2.0 CABLE



BLACK BOX USB TO  
CAT5 EXTENDER



JABRA USB  
SPEAKERPHONE



FCA800V/810V/820V		Compatibility
ViewShare Video Conference Kits without Extender		Fusion Series cart, stand and wall mounts
Model	Display Sizes	Camera Placement
FCA800V	Large	Above/Below
FCA810V	XL	Above/Below
FCA820V	Large & XL	Center



FCA800VE/810VE/820VE		Compatibility
ViewShare Video Conference Kits with Extender		Fusion Series cart, stand and wall mounts
Model	Display Sizes	Camera Placement
FCA800VE	Large	Above/Below
FCA810VE	XL	Above/Below
FCA820VE	Large & XL	Center

## FUSION™ CART & STAND ACCESSORIES




FCA623*	Color	Compatibility
Dual Display Adapter Accessory	<b>S</b> <b>B</b>	XPAU, XVAU

\*XPAU cart shown with FCA623 Dual display adapter.



FCA612	Dimensions (WxD)	Weight Capacity	Compatibility
Large, Height-Adjustable Accessory Shelf	1219 x 529 mm	11.3 kg	MPAU, MFAU, LPAU, LFAU, XPAU



FCA611	Dimensions (WxD)	Weight Capacity	Compatibility
Small, Height-Adjustable Accessory Shelf	619 x 386 mm	11.3 kg	MPAU, MFAU, LPAU, LFAU



FCA650/651	Compatibility
Large & Medium CPU Holders	MPAU, MFAU, LPAU, LFAU
Model	Max Equipment Size (HxWxD)
FCA650	381 x 130 x 381 mm
FCA651	254 x 92 x 254 mm



FCA510/515	Compatibility
Storage Accessories	All Fusion Ceiling & Freestanding Mounts
Model	Dimensions (HxWxD)
FCA510	267 x 267 x 76 mm
FCA515	394 x 394 x 114 mm



FCA520	Max Equipment Depth	Compatibility
Universal Clamp Kit (Qty 2)	83 mm	All Fusion Ceiling & Freestanding Mounts



FCA800/FCA801	Compatibility	
Above/Below Shelf, Large* Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts	
Model	Size	Weight Capacity
FCA800	203 mm	9.1 kg
FCA801	355 mm	9.1 kg

\*Typical screen size: 46-70".



FCA810/FCA811	Compatibility	
Above/Below Shelf, XL* Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts	
Model	Size	Weight Capacity
FCA810	203 mm	9.1 kg
FCA811	355 mm	9.1 kg

\*Typical screen size: 70-100".



FCA820/FCA821	Compatibility	
Fusion Center Camera Shelf	Fusion Ceiling, Freestanding and Wall Mounts	
Model	Size	Weight Capacity
FCA820	203 mm	9.1 kg
FCA821	355 mm	9.1 kg



FCA802/FCA812	Compatibility	
Component Shelf, Large Displays	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts	
Model	Typical Screen Size	Weight Capacity
FCA802	46 - 70"	9.1 kg
FCA812	70 - 100"	9.1 kg



FCA830/FCA840+	Compatibility	
Center Channel Speaker Adapter	Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts	
Model	Typical Screen Size	Weight Capacity
FCA830	52 - 80"	9.1 kg
FCA840	70 - 100"+	9.1 kg

## FUSION™ CART & STAND ACCESSORIES



FCA831/FCA841+		Compatibility
Center Channel Speaker Adapter		Fusion Fixed & Tilt Wall, Freestanding & Ceiling Mounts
Model	Typical Screen Size	Weight Capacity
FCA831	42 - 70"	4.5 kg/side
FCA841	50 - 95"	4.5 kg/side



FCACLIPS	Compatibility
Anchor Points for Zip Ties (Qty 10)	All Fusion Ceiling & Freestanding Mounts



## AUTOMATED POP-UP LIFT FEATURES



### CONTROL OPTIONS

Multiple control options include serial communication, dry contact control and IR remote (included).



### SMOOTH EXTENSION

Fast and quiet travel at more than 51 mm per second with preset viewing positions.



### CLICKCONNECT™

Hear an audible click when the screen engages with the mount. Easy to connect/disconnect - no tools needed!



### CABLE MANAGEMENT

Unique cable management system allows cables to move freely with the lift.



CONTROL OPTIONS



SMOOTH EXTENSION

## CM2L40UI 32 - 61" POP-UP LIFT



An automated floor lift with multiple control options including serial communication and IR remote.

Weight Capacity	Dimensions (HxWxD) (Retracted)	Mounting Patterns (W,H)	Max Extension	Overall Travel	Compatibility
86.2 kg	778 x 603 x 195 mm	200 x 200 - 862 x 517 mm	1803 mm	1016 mm	230VAC, 50Hz





## OTHER CARTS & STANDS MOUNTS

### PFCU 42 - 71" HEIGHT-ADJUSTABLE CART



A collapsible mobile cart for portrait and landscape orientations - ideal for corporate and rental/staging applications.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor range	Tilt	Color
90.7 kg	2073 x 943 x 816 mm	200 x 200 - 862 x 517 mm	1220 x 1830 mm	±15°	<b>B</b>



### PF1U 42 - 71" HEIGHT-ADJUSTABLE STAND



A solid, low profile single display floor stand with integrated cable management and support for both portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Color
90.7 kg	2388 x 914 x 762 mm	200 x 200 - 862 x 517 mm	1300 - 2170 mm	±15°	<b>B</b>



### MFCU 30 - 55" HEIGHT-ADJUSTABLE CART



Smaller version of the PFC with landscape and portrait orientation capability.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Color
56.7 kg	1975 x 943 x 816 mm	100 x 100 - 709 x 431 mm	1220 - 1830 mm	±15°	<b>B</b>



**MF1U** 30 - 55" HEIGHT-ADJUSTABLE STAND

A solid, low profile single display floor stand with integrated cable management. Supports portrait and landscape orientations.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Center of Display to Floor Range	Tilt	Color
56.7 kg	2327 x 914 x 762 mm	100 x 100 - 709 x 431 mm	1300 - 2180 mm	±15°	<b>B</b>



## OTHER CARTS & STANDS ACCESSORIES



PAC722	Compatibility
P-Series Dual Side-by-Side Display Accessory	PFC, PF1



MAC722	Compatibility
M-Series Dual Side-by-Side Display Accessory	MFC, MF1




PAC715/716	Compatibility		
Video Conferencing Camera Shelves - Above or Below	P-Series (356 x 356 mm) & M-Series (200 x 200 mm) Q-Latch		
Model	Dimensions (WxD)	Weight	Capacity
PAC715	229 x 223 mm	4.5 kg	
PAC716	356 x 301 mm	4.5 kg	



PAC710	Dimensions (WxD)	Weight Capacity	Compatibility
Height Adjustable Accessory Shelf	457 x 305 mm	11.3 kg	P- & M-Series Carts & Floor Stands



PAC730A	Max Equipment Size (HxWxD)	Compatibility
Secure Storage Shelf w/ Lock	89 x 445 x 305 mm	P- & M-Series Carts & Floor Stands



PAC400	Compatibility
P-Series Rotation Adapter	PDR, PNR & Other Q-Latch Mounts

PACTP1	Compatibility
Touch Panel Stabilizer Kit	P- & M-Series Carts & Floor Stands



KFA220B/S	Compatibility
Dual Monitor Accessory - Black / Silver	P- & M-Series Carts & Floor Stands



KFA225B/S	Compatibility
Widescreen Dual Monitor Accessory - Black / Silver	P- & M-Series Carts & Floor Stands



KFA320B/S	Compatibility
Triple Monitor Accessory - Black / Silver	P- & M-Series Carts & Floor Stands



KFA325B/S	Compatibility
Widescreen Triple Monitor Accessory - Black / Silver	P- & M-Series Carts & Floor Stands

## TABLE STAND DISPLAY MOUNTS

### STLU 32 - 52" TABLE STAND



This bolt-down swivel table stand ships with security hardware – ideal for hospitality installs.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Swivel Options
56.7 kg	603 x 698 x 140 mm	100 x 100 - 600 x 400 mm	15°, 30°, 45° or 90°



### PTSU 30-50" TABLE STAND



Stylish solutions for residential, commercial and business applications.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust
45.4 kg	545 x 607 x 278 mm	200 x 200 - 860 x 515 mm	102 mm



### STS1 18 - 30" BOLT-DOWN TABLE STAND



This secure, bolt-down table stand for small screens provides swivel and tilt capability – ideal for point of sale applications.

Weight Capacity	Dimensions (HxWxD)	Mounting Patterns (W,H)	Height Adjust	Pivot/Tilt	Swivel Range Options
13.6 kg	409 x 152 x 175 mm	75 x 75 - 100 x 100 mm	130 mm	±15°	90°, 180°, 270°



# DESK MONITOR MOUNTS

(Shown with Apple® Cinema Display adapter, not included.)

## KONTOUR™ K1 DYNAMIC HEIGHT-ADJUST DESK MOUNTS FEATURES



### HEAVY DUTY DESIGN

Features sleek, solidly constructed forged aluminum arms.



### ULTIMATE FLEXIBILITY

Gas-spring technology provides smooth dynamic height adjustment up to 330 mm and enables ideal positioning.



### CABLE MANAGEMENT

Tool-free cable management covers create a clean, professional look.



### FAST INSTALLATION

Simple 3-step installation and integrated quick-connect monitor interface makes mounting and maintenance easy.



### CENTRIS® EXTREME TILT

Tilts -75°/+10° for the ultimate ergonomic solution.



### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

**K1C220** DUAL MONITOR COLUMN CLAMP

This dynamic mount provides extended reach for 2 monitors. Offers independent manual height adjust on the column up to 178 mm and dynamic height adjust up to 330 mm. For reduced height: K1C220\_XRH.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
62 mm	523 mm	2.3 - 9.9 kg	<b>S</b> <b>B</b>

**K1C210** DUAL MONITOR COLUMN CLAMP

Provides a low-profile solution for 2 monitors installed next to a cubical wall or adjacent desk, with 178 mm independent manual height adjust and dynamic height adjust up to 330 mm. Features single-link arms.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
62 mm	352 mm	2.3 - 11.3 kg	<b>S</b> <b>B</b>

**K1C22H** DUAL MONITOR COLUMN CLAMP ARRAY

Securely holds 2 monitors on an array bar. Offers manual height adjust on the column up to 178 mm and dynamic height adjust up to 330 mm with dual-link arm. For reduced height: K1C22H\_XRH.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Max Display Width	Colors
156 mm	587 mm	0.9 - 4.08 kg	632 mm	<b>S</b> <b>B</b>

**K1C120** SINGLE MONITOR COLUMN CLAMP

Dynamic dual-link mount provides extended reach for a single monitor. Offers manual height adjustment on the column up to 178 mm and dynamic height adjustment up to 330 mm. For reduced height: K1C120\_XRH.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
62 mm	571 mm	2.3 - 9.9 kg	<b>S</b> <b>B</b>





**K1C110** SINGLE MONITOR COLUMN CLAMP

Dynamic single-link mount provides extended reach for a single monitor. Offers manual height adjustment on the column up to 178 mm and dynamic height adjustment up to 330 mm.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
62 mm	400 mm	2.3 - 11.3 kg	<b>S</b> <b>B</b>

**K1D230** DUAL MONITOR DESK CLAMP

Featuring triple-link arms, this dynamic mount securely holds 2 monitors and provides 330 mm of dynamic height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
62 mm	714 mm	2.3 - 4.54 kg	<b>S</b> <b>B</b>

**K1D220** DUAL MONITOR DESK CLAMP


Featuring dual-link arms, this dynamic mount securely holds 2 monitors and provides 330 mm of dynamic height adjustment. For reduced height: K1D220\_XRH.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
62 mm	548 mm	2.3 - 11.3 kg	<b>S</b> <b>B</b>

**K1D22H** DUAL MONITOR DESK ARRAY

Securely holds 2 monitors on an array bar allowing for perfect alignment and low-profile placement. Flexible dual-link arm offers dynamic height adjustment up to 330 mm. For reduced height: K1D22H\_XRH.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Max Display Width	Colors
109 mm	538 mm	0.9 - 4.08 kg	632 mm	<b>S</b> <b>B</b>

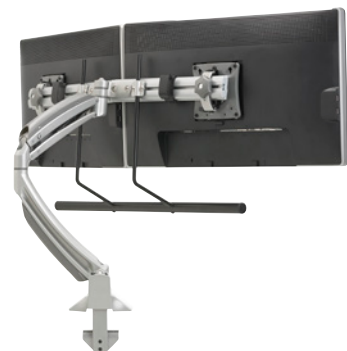

## K1D130 SINGLE MONITOR COLUMN CLAMP



Dynamic triple-link mount provides ultra-extended reach for a single monitor. Offers manual height adjustment on the column up to 178 mm and dynamic adjustment up to 330 mm.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
62 mm	648 mm	2.3 - 4.54 kg	<b>S</b> <b>B</b>



## K1D120 SINGLE MONITOR DESK CLAMP



Dynamic dual-link mount securely holds a single monitor and provides up to 330 mm of dynamic height adjustment. For reduced height: K1D120\_XRH.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
62 mm	523 mm	2.3 - 11.3 kg	<b>S</b> <b>B</b>



## KONTOUR™ K1 DYNAMIC HEIGHT-ADJUST DESK MOUNTS

### ACCESSORIES



KRA219	Compatibility
Table Clamp Mount Kit	K1 and K2 Series Mounts*



KRA220	Compatibility
Extension Arm Accessory	K1 and K2 Series Mounts*



KRA221	Compatibility
K1C Expansion Arm	Compatibility: K1 Series Column Mounts



KRA223	Compatibility
Dual Monitor Array Bar	K1 and K2 Series Mounts*



KRA224	Compatibility
Dual Monitor Array Bar Handle	KRA223



KRA225	Compatibility
Extreme Tilt Head Accessory	K1 and K2 Series Mounts*



KSA1250B	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products



KRA300	Compatibility
Laptop Accessory	K1 Series Mounts



FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products



KRA234	Weight Capacity	Max Equipment Size (HxWxD)	Compatibility
Thin Client Accessory Bracket	2.3 kg	254 x 254 x 60 mm	K1 & K2 Series, TS118, FSR, FTR

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns

\* Compatible with new K1 and K2 models only. Not compatible with discontinued models: K1C100, K1C200, K1C250, K1D100, K1D200, KS100, KS200, KIW100, KIW200, K1P100, K1P200, K2C100, K2C200, K2P100, K2P200, K2W100 and K2W200.

## KONTOUR™ K2 DESK MOUNT FEATURES



### HEAVY DUTY DESIGN

Features sleek, solidly constructed forged aluminum arms.



### ULTIMATE FLEXIBILITY

Column mount slides vertically along column for ideal positioning and provides 273 mm of manual height adjustment.



### FAST INSTALLATION

Tear-drop hole pattern for easy mounting and maintenance.



### CABLE MANAGEMENT

Tool-free cable management guide clips for a clean, professional look.



### CENTRIS® TILT

Tilts  $\pm 15^\circ$  for a flexible, ergonomic solution.



### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

## K2C220 DUAL MONITOR COLUMN CLAMP



Dual monitor column clamp mounts easily to edge of desk. Features flexible dual-link arms with independent manual height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Colors
105 mm	448 mm	9.9 kg	<b>S</b> <b>B</b>



## K2C22H DUAL MONITOR COLUMN ARRAY



Securely holds 2 monitors on an array bar allowing for perfect alignment and low-profile placement. Flexible, dual-link arm offers manual height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity (per monitor)	Maximum Display Width	Colors
156 mm	499 mm	0.9 - 4.08 kg	632 mm	<b>S</b> <b>B</b>



**K2C120** SINGLE MONITOR COLUMN CLAMP

Single monitor column clamp mounts easily to the edge of desk.  
Features flexible dual-link arm with manual height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
152 mm	495 mm	9.9 kg	<b>S</b> <b>B</b>

**K2C110** SINGLE MONITOR COLUMN CLAMP

Single monitor column clamp mounts easily to the edge of desk.  
Features single-link arm with manual height adjustment.

Minimum Depth from Back of Desk	Maximum Extension	Weight Capacity	Colors
152 mm	324 mm	9.9 kg	<b>S</b> <b>B</b>



## KONTOUR™ K2 SERIES DESK MOUNT ACCESSORIES



KRA219	Compatibility
Table Clamp Mount Kit	K1 and K2 Series Mounts*



KRA220	Compatibility
Extension Arm Accessory	K1 and K2 Series Mounts*



KRA221	Compatibility
K1C Expansion Arm	Compatibility: K1 Series Column Mounts



KRA223	Compatibility
Dual Monitor Array Bar	K1 and K2 Series Mounts*



KRA224	Compatibility
Dual Monitor Array Bar Handle	KRA223




KRA225	Compatibility
Extreme Tilt Head Accessory	K1 and K2 Series Mounts*



FSB4090B	Compatibility
Custom Interface Bracket for Cisco® EX90	K2 Series Mounts



KSA1250B	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products



FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products



KRA234	Weight Capacity	Max Equipment Size (HxWxD)	Compatibility
Thin Client Accessory Bracket	2.3 kg	254 x 254 x 60 mm	K1 & K2 Series, TS118, FSR, FTR

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns

\* Compatible with new K1 and K2 models only. Not compatible with discontinued models: K1C100, K1C200, K1C250, K1D100, K1D200, KS100, K1S200, K1W100, K1W200, K1P100, K1P200, K2C100, K2C200, K2P100, K2P200, K2W100 and K2W200.



# DESK ARRAY MONITOR MOUNTS

## KONTOUR™ K3 STATIC DESK ARRAYS FEATURES



### LATERAL SHIFT

Centris heads are easily moved along array arms for quick lateral shift adjustments.



### ULTIMATE FLEXIBILITY

Independently height adjustable arms (and center head where applicable) provide seamless screen alignment. Arms can be adjusted from 0° to 15° for customized viewing angles.



### HEAVY DUTY DESIGN

Features sleek, solidly constructed arms with that hold 6.8 kg per monitor.



### CENTRIS® TILT

Offers up to ±12° of Centris fingertip tilt for effortless display positioning.



### MODULARITY

Meets a wide range of monitor sizes and configurations. A great multi-array solution for call centers, security desks, IT, health care, control rooms and other multi-monitor settings.



### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

**K3F220B** FREESTANDING 2x2 ARRAY

Static freestanding array mount for monitors 2 wide x 2 tall.

Maximum Monitor Height	Maximum Monitor Width	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
460 mm	736 mm	±12°	10 - 27"	6.8 kg	<b>B</b>

**K3G220B** GROMMET MOUNTED 2x2 ARRAY

Static grommet array mount for monitors 2 wide x 2 tall. Compatible with desks 13 - 127 mm thick.

Maximum Monitor Height	Max Monitor Width	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
460 mm	736 mm	±12°	10 - 27"	6.8 kg	<b>B</b>

**K3G320B** GROMMET MOUNTED 3x2 ARRAY

Static grommet array mounts for monitors 3 wide x 2 tall. Compatible with desks 13 - 127 mm thick.

Max Monitor Width	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
Dual display - 1301 mm Triple display - 650 mm	Outer - ±12° Center - ±10°	Dual: up to 30" Triple: up to 27"	6.8 kg	<b>B</b>



**K3F310B** FREESTANDING 3x1/2x1 ARRAY

Static freestanding array mount for 2 or 3 monitor/tablet combinations.  
Telescoping rails add 203 mm per arm of additional lateral adjustment.

Maximum Monitor Width	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
Dual display - 1301 mm Triple display - 650 mm	Outer - $\pm 12^\circ$ Center - $\pm 10^\circ$	Dual: up to 30" Triple: up to 27"	6.8 kg	<b>B</b>

**K3G310B** GROMMET MOUNTED 3x1/2x1 ARRAY


Static grommet array mount for 2 - 3 monitor/tablet combinations.  
Telescoping rails add 203 mm per arm of additional lateral adjustment.

Monitor Width Range	Tilt	Typical Screen Size	Desktop Thickness	Weight Capacity (per monitor)	Colors
Dual display - 1301 mm Triple display - 650 mm	Outer - $12^\circ$ Center - $10^\circ$	Dual: up to 30" Triple: up to 27"	13 - 127 mm	6.8 kg	<b>B</b>

**K3F120B** FREESTANDING 1x2 ARRAY


Static freestanding array mount for 2 monitors arranged vertically.

Maximum Monitor Height	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
460 mm	$\pm 10^\circ$	10 - 30"	6.8 kg	<b>B</b>

**K3G120B** GROMMET MOUNTED 1x2 ARRAY

Static grommet array mount for 2 monitors arranged vertically.  
Compatible with desks 13 - 127 mm thick.

Maximum Monitor Height	Tilt	Typical Screen Size	Weight Capacity (per monitor)	Colors
460 mm	$\pm 10^\circ$	10 - 30"	6.8 kg	<b>B</b>



## KONTOUR™ K3 SERIES DESK ARRAY

### ACCESSORIES



KRA500	Compatibility
Desk Clamp Accessory	K3 Series Mounts



KSA1250	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products



FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

#### FSB4073

#### Compatibility

50 x 50 mm VESA®  
Adapter Bracket

Mounts with 100 x 100 mm VESA® patterns  
& displays with 50 x 50 mm VESA patterns

#### FSB4041

#### Compatibility

100 x 100 mm VESA®  
Adapter Bracket

Mounts with 100 x 100 mm VESA pattern &  
displays using M8 screws with 200 x 200 mm  
VESA patterns

## KONTOUR™ K4 DEPTH-ADJUSTABLE DESK ARRAYS

### FEATURES



#### FOCAL DEPTH ADJUSTMENT

Provides articulating focal depth adjustment for optimal ergonomics in multi-user environments, allowing you to reposition the bank of screens to a preferred viewing distance.



#### AESTHETIC DESIGN

Form meets function with the K4 Series. Solidly constructed, forged aluminum arms are sleekly designed for a clean appearance.



#### EXCEPTIONAL FLEXIBILITY

Swivel and pan adjustment capability and Centris® Fingertip Tilt for ideal screen positioning. Also includes an integrated handle for quick ergonomic adjustment to fit the user.



#### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.



#### CENTRIS® TILT


Offers up to  $\pm 12^\circ$  of Centris™ fingertip tilt for effortless display positioning.

### K4G610B GROMMET MOUNTED 6x1 ARRAY



Grommet array mount for 6 monitors in a row with two anchor points. Extends up to 412 mm and offers  $\pm 12^\circ$  tilt and  $20^\circ$  arm rotation.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
291 - 463 mm	614 mm	815 mm	up to 24"	6.8 kg	25 - 125 mm

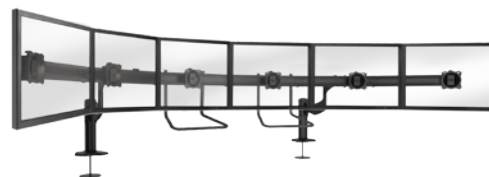

### K4G510B GROMMET MOUNTED 5x1 ARRAY



Grommet array mount for 5 monitors in a row with two anchor points. Extends up to 412 mm and offers  $\pm 12^\circ$  tilt and  $20^\circ$  rotation.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
291 - 463 mm	614 mm	592 mm	up to 24"	6.8 kg	25 - 125 mm



**K4G410B** GROMMET MOUNTED 4x1 ARRAY

Grommet array mount for 4 monitors in a row with two anchor points.  
Extends up to 412 mm and offers  $\pm 12^\circ$  tilt and  $20^\circ$  rotation.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
291 - 463 mm	614 mm	396 mm	up to 24"	6.8 kg	25 - 125 mm

**K4G310B** GROMMET MOUNTED 3x1 ARRAY

Grommet array mount for 3 monitors in a row with one anchor point.  
Extends up to 412 mm and offers  $\pm 12^\circ$  tilt and  $20^\circ$  rotation.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
291 - 463 mm	614 mm	239 mm	up to 24"	6.8 kg	25 - 125 mm

**K4G210B** GROMMET MOUNTED 2x1 ARRAY

Grommet array mount for 2 monitors in a row with one anchor point.  
Extends up to 412 mm and offers  $\pm 12^\circ$  tilt and  $20^\circ$  rotation.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
291 - 463 mm	943 mm	239 mm	up to 24"	6.8 kg	25 - 125 mm

**K4G120B** GROMMET MOUNTED 1x2 ARRAY

Grommet array mount for 2 monitors stacked with one anchor point.  
Offers  $\pm 10^\circ$  tilt.

Center of Display to Table Range	Max. Monitor Height	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
291 - 463 mm	406 mm	239 mm	up to 24"	6.8 kg	25 - 125 mm






**K4G620B** GROMMET MOUNTED 6X2 ARRAY

Grommet array mount for 12 monitors stacked with two anchor points.

Extends at least 305 mm and offers  $\pm 12^\circ$  tilt.


Center of Display to Table Range	Max. Monitor Height	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
269 - 1107 mm	584 mm	815 mm	up to 24"	6.8 kg	25 - 125 mm

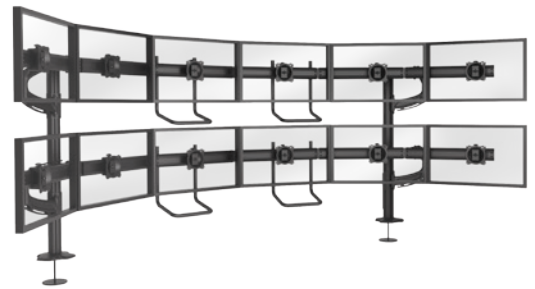**K4G520B** GROMMET MOUNTED 5X2 ARRAY

Grommet array mount for 10 monitors in two rows with two anchor points.

Extends at least 305 mm and offers  $\pm 12^\circ$  tilt.


Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
269 - 1107 mm	584 mm	592 mm	up to 24"	6.8 kg	25 - 125 mm

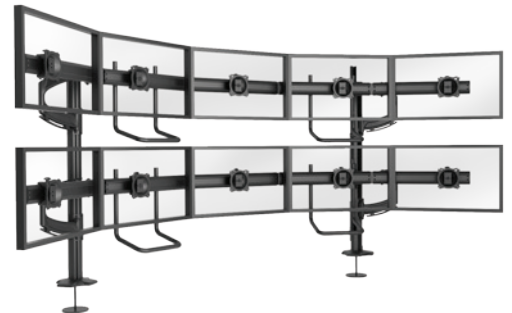**K4G420B** GROMMET MOUNTED 4X2 ARRAY

Grommet array mount for 8 monitors in two rows with two anchor points.

Extends at least 305 mm and offers  $\pm 12^\circ$  tilt.

Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
269 - 1107 mm	584 mm	396 mm	up to 24"	6.8 kg	25 - 125 mm

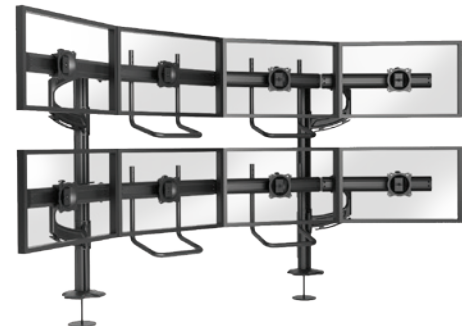**K4G320B** GROMMET MOUNTED 3x2 ARRAY

Grommet array mount for 6 monitors in two rows with one anchor point.

Extends at least 305 mm and offers  $\pm 12^\circ$  tilt.


Center of Display to Table Range	Max Width (per monitor)	Minimum Depth	Typical Screen Size	Weight Cap. (per monitor)	Desktop Thickness
269 - 1107 mm	584 mm	318 mm	up to 24"	6.8 kg	25 - 125 mm



KONTOUR™ K4 SERIES DESK ARRAY  
ACCESSORIES



KSA1250	Compatibility
Quick-Connect Interface for Dell UltraSharp Monitors	All Kontour products



FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns





## WALL MONITOR MOUNTS

### KONTOUR™ K1 SERIES WALL MOUNT FEATURES



**HEAVY DUTY DESIGN**  
Features sleek and solid forged aluminum arms.



**ULTIMATE FLEXIBILITY**  
Gas-spring technology provides smooth dynamic height adjustment up to 330 mm and enables ideal monitor positioning.



**FAST INSTALLATION**  
Simple 3-step installation and integrated quick-connect interface for easy mounting and maintenance.



**CABLE MANAGEMENT**  
Tool-free cable management covers create a clean, professional look.



**CENTRIS® EXTREME TILT**  
Tilts -75°/+10° for an ultimate ergonomic solution.



**MOUNTING PATTERN**  
Compatible with 75 x 75 mm and 100 x 100 mm VESA patterns.

## K1W220 DUAL MONITOR WALL MOUNT



Featuring flexible dual-link arms, this dynamic mount securely attaches two monitors.

Minimum Depth from Wall	Maximum Extension	Weight Capacity (per monitor)	Colors
62 mm	525 mm	2.3 - 11.3 kg	<b>B</b>



## K1W120 SINGLE MONITOR WALL MOUNT



Dynamic mount securely attaches a single monitor.  
Features flexible dual-link arm.

Minimum Depth from Wall	Maximum Extension	Weight Capacity	Colors
62 mm	512 mm	2.3 - 11.3 kg	<b>S B</b>



## K1W110 SINGLE MONITOR WALL MOUNT



Dynamic mount with single-link arm securely attaches single monitor.

Minimum Depth from Wall	Maximum Extension	Weight Capacity	Colors
62 mm	341 mm	2.3 - 11.3 kg	<b>B</b>



## KONTOUR K1 SERIES WALL MOUNT ACCESSORIES



KRA219	Compatibility
Table Clamp Mount Kit	K1 and K2 Series Mounts*




KRA220	Compatibility
Extension Arm Accessory	K1 and K2 Series Mounts*



KRA223	Compatibility
Dual Monitor Array Bar	K1 and K2 Series Mounts*



KRA224	Compatibility
Dual Monitor Array Bar Handle	K1 and K2 Series Mounts*



FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns

\* Compatible with new K1 and K2 models only. Not compatible with discontinued models: K1C100, K1C200, K1C250, K1D100, K1D200, KS100, KS200, K1W100, K1W200, K1P100, K1P200, K2C100, K2C200, K2P100, K2P200, K2W100 and K2W200.

# KONTOUR™ K2 SERIES WALL MOUNT

## FEATURES

- 

HEAVY DUTY DESIGN  
Features sleek, solidly constructed forged aluminum arms.
- 

FAST INSTALLATION  
Tear-drop hole pattern for easy mounting and maintenance.
- 

CENTRIS® TILT  
Tilts ±15° for a flexible ergonomic solution.
- 

CABLE MANAGEMENT  
Tool-free cable management guide clips for a clean, professional look.
- 

MOUNTING PATTERN  
Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.



CENTRIS® TILT

## K2W120 SINGLE MONITOR WALL MOUNT



Securely attaches a single monitor to the wall. Features a dual-link arm for added flexibility.

Minimum Depth from Back of Wall	Maximum Extension	Weight Capacity	Colors
75 mm	437 mm	18.14 kg	 






## KONTOUR™ K2 SERIES WALL MOUNT ACCESSORIES



OFB-xxx	Compatibility
Office Furniture Interface Brackets	K1 and K2 Series Wall Mounts



FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns

## OTHER KONTOUR™ WALL MOUNTS

### KOW100 PITCH/PIVOT SINGLE WALL MOUNT

Easily attaches a monitor to the wall and provides smooth pivot and tilt adjustment for optimal viewing.

Weight Capacity	Mounting Patterns (W,H)	Tilt	Minimum Depth from Wall	Typical Screen Size	Colors
11.3 kg	75 x 75 mm, 100 x 100 mm	+75°, -10°	81 mm	10 – 30"	<b>S</b> <b>B</b>



## KONTOUR™ K4 SERIES WALL MOUNT FEATURES



### MODULARITY

An easily adjustable solution for monitor array workstations where multiple users need to reposition the bank of screens to their preferred viewing distance. Perfect for control rooms, trading desks, call centers, security desks, IT, healthcare and more.



### AESTHETIC DESIGN

Form meets function with the K4 Series. Solidly constructed, forged aluminum arms are sleekly designed for a clean appearance.



### EXCEPTIONAL FLEXIBILITY


Provides articulating focal depth adjustment, swivel and pan adjustment capability and Centris® Fingertip Tilt for ideal screen positioning. Also includes an integrated handle for quick ergonomic adjustment to fit the user.



### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

## K4W310B WALL MOUNTED 3x1 ARRAY




Adjustable wall mount for 3 monitors in a row with one anchor point.



Max. Monitor Width	Extension	Minimum Depth	Arm Rotation	Typical Screen Size	Tilt	Weight Capacity (per monitor)
614 mm	412 mm	239 mm	0 - 20°	up to 24"	±12°	6.8 kg

## K4W210B WALL MOUNTED 2x1 ARRAY



Adjustable wall mount for 2 monitors in a row with one anchor point.




Max. Monitor Width	Extension	Minimum Depth	Arm Rotation	Typical Screen Size	Tilt	Weight Capacity (per monitor)
943 mm	412 mm	239 mm	0 - 20°	up to 30"	±12°	6.8 kg

K4W120B WALL MOUNTED 1x2 ARRAY



Adjustable wall mount for 2 monitors arranged vertically with one anchor point.

Max. Monitor Height	Extension	Minimum Depth	Tilt	Weight Capacity (per monitor)
406 mm	412 mm	94 mm	±10°	6.8 kg

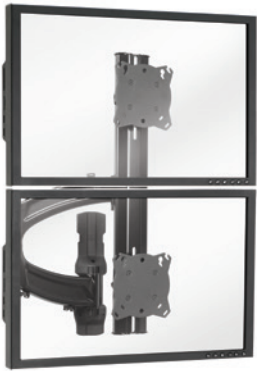

## KONTOUR™ K1 SERIES POLE MOUNT

### FEATURES



#### EASY INSTALLATION

Simple 3-step installation and integrated quick-connect interface makes mounting and maintenance easy. Mounts on pre-existing poles with 38 - 48 mm outer diameters.



#### CENTRIS® EXTREME TILT

Centris® technology provides effortless tilt up to -75/+10°.



#### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.



#### HEAVY DUTY DESIGN

Features sleek and solid forged aluminum arms.



#### ULTIMATE FLEXIBILITY

Gas-spring technology provides smooth dynamic height adjustment up to 330 mm and enables ideal monitor positioning.



#### CABLE MANAGEMENT

Tool-free cable management covers create a clean, professional look.

### K1P220 DUAL MONITOR POLE MOUNT



Dynamic pole mount firmly holds 2 monitors. Flexible dual-link arms provide up to 330 mm of height adjustment.

Minimum Depth from Pole	Extension	Weight Capacity (per monitor)	Colors
62 mm	510 mm	2.3 - 11.3 kg	<b>B</b>



### K1P120 SINGLE MONITOR POLE MOUNT



Flexible dual-link arm provides up to 330 mm of height adjustment.

Minimum Depth from Pole	Extension	Weight Capacity	Colors
64 mm	493 mm	2.3 - 11.3 kg	<b>S B</b>



KONTOUR™ K1 SERIES POLE MOUNT  
ACCESSORIES

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns



FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

## KONTOUR™ K2 SERIES POLE MOUNT FEATURES



### HEAVY DUTY DESIGN

Features sleek, solidly constructed forged aluminum arms.



### CENTRIS® TILT

Centris® technology provides effortless tilt up to  $\pm 15^\circ$ .



### CABLE MANAGEMENT

Includes tool-free cable management loops for a clean, professional look.



### EASY INSTALLATION

Teardrop hole pattern makes mounting the screens quick and easy. Mounts on pre-existing poles with 38 - 48 mm outer diameters.



### MOUNTING PATTERN

Compatible with 75 x 75 mm and 100 x 100 mm VESA® patterns.

## K2P120 SINGLE MONITOR POLE MOUNT



Pole mount firmly holds a single monitor. Dual-link arm offers added flexibility.

Minimum Depth from Pole	Maximum Extension	Weight Capacity	Colors
74 mm	422 mm	18.14 kg	<b>B</b>





KONTOUR™ K2 SERIES POLE MOUNT  
ACCESSORIES

FSB4073	Compatibility
50 x 50 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA® patterns & displays with 50 x 50 mm VESA patterns

FSB4041	Compatibility
100 x 100 mm VESA® Adapter Bracket	Mounts with 100 x 100 mm VESA pattern & displays using M8 screws with 200 x 200 mm VESA patterns



FSBV	Compatibility
Small Flat Panel Universal Interface Bracket	All Kontour Series Products

OTHER KONTOUR™ POLE MOUNT

KOP100 SINGLE MONITOR POLE MOUNT



Easily attaches a monitor to a pole and provides smooth pivot and tilt adjustment.

Column Diameter Range	Weight Capacity	Mounting Patterns (W,H)	Tilt	Min.Depth from Pole	Typical Screen Size	Colors
38 - 48 mm	18.14 kg	75 x 75 mm, 100 x 100 mm	+75°, -10°	66 mm	10 - 30"	



# S1 SERIES KNOCK DOWN RACKS

## NS1F Series 23" OR 28" DEPTHS

Rack rails can be field cut to length to shorten the rack if required by unexpected changes to the installation space. Includes floor levelers, 3U blanking/alignment panels, bottom vent panel and top 3U blanking panels. Casters, doors and side panels ordered separately.

## RAXXESS™ S1 SERIES FEATURES

### KNOCK DOWN

The easiest-to-assemble knock down rack on the market.

### INSTALLER-FRIENDLY

The rails are self-supported during assembly allowing one person to easily construct the rack in less than five minutes.

### EASY-TO-ADD ACCESSORIES

Steel flanged blanking panels at the top are easily removed to accept any two 3U fans or panels.

### CABLE MANAGEMENT

The side braces are punched to accept additional rack rails or can be used as a place to land cable ties. Conduit knockouts are laser cut in top and bottom of rack.



## S1 SERIES RACKS

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters
NS1F1223	12 space	584 mm	574 mm	489 mm	724 mm	762 mm
NS1F2023	20 space	584 mm	574 mm		1079 mm	1110 mm
NS1F2823	28 space	584 mm	574 mm		1435 mm	1473 mm
NS1F3628	36 space	711 mm	701 mm		1790 mm	1828 mm
NS1F4128	41 space	711 mm	701 mm		2010 mm	2057 mm

## S1 SERIES ACCESSORIES



S1 Steel Rack Door Options

Model	Rack Height	Type
NS1D12S	12 space	Solid Steel
NS1D20S	20 space	Solid Steel
NS1D28S	28 space	Solid Steel
NS1D36S	36 space	Solid Steel
NS1D41S	41 space	Solid Steel



S1 Perforated Rack Door Options

Model	Rack Height	Type
NS1D12F	12 space	Perforated Steel
NS1D20F	20 space	Perforated Steel
NS1D28F	28 space	Perforated Steel
NS1D36F	36 space	Perforated Steel
NS1D41F	41 space	Perforated Steel



S1 Plexi Rack Door Options

Model	Rack Height	Type
NS1D12P	12 space	Plexi
NS1D20P	20 space	Plexi
NS1D28P	28 space	Plexi
NS1D36P	36 space	Plexi
NS1D41P	41 space	Plexi



S1 Rack Side Panel Pair Options

Model	Rack Height	Rack Depth
NS1S1223	12 space	584 mm
NS1S2023	20 space	584 mm
NS1S2823	28 space	584 mm
NS1S3628	36 space	711 mm
NS1S4128	41 space	711 mm

More universal rack accessories available on page 133.

# S2 SERIES KNOCK DOWN RACKS

## NS2F Series 20" DEPTH

Our most versatile, modular racks, the S2 Series can be stacked to create a tower, arranged side-by-side for a gangable solution, wall mounted or placed in furniture. The solution ships flat and assembles in less than 10 minutes for an ultra-easy install.

## RAXXESS™ S2 SERIES FEATURES

### EASY SHIPPING AND ASSEMBLY

Knocks down completely for easy flat pack shipping and can be assembled in less than 10 minutes.

### MULTIPLE INSTALL OPTIONS

15U and 20U racks can be stacked for five different height combinations. Standard solution can be standalone with included levelers, wall mounted or hidden in furniture. Caster and on-wall swing-out accessories provide additional install options.

### CABLE MANAGEMENT

Rack rail knockouts allow for easy zip-tie cable management.

### HEAVY DUTY

Welded frame provides strong support for equipment, holding up to 600 lbs (272 kg) on the floor or 200 lbs (90 kg) on wall.

### EASY-TO-ADD ACCESSORIES

Compatible with all standard Chief rack accessories.



## S2 SERIES RACKS

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters
NS2F1520	15 space	508 mm	485 mm	519 mm	667 mm	723 mm
NS2F2020	20 space	508 mm			519 mm	945 mm

## S2 SERIES ACCESSORIES

NS2SK	Compatibility
On-wall Swing-out Mount	NS2 Series

NAC20M	Compatibility
2.0 Medium Duty Rack Caster	NS2 Series

*More universal rack accessories available on page 142.*

# G1 SERIES GANGABLE RACKS

## NG1F Series 33" DEPTH

Rear rack rail is included for easy cable management. Floor levelers, casters, front and rear doors and side panels ordered separately.

## RAXXESS™ G1 SERIES FEATURES

### HASSLE-FREE

Pre-welded ganging nuts and included hardware provide the ability to gang racks after components are loaded.

### SMART PACKAGING

Packaged with padding that stays on the rear of the rack after other packaging is removed so the rack can be safely laid on the floor to load heavy components.

### EASY-TO-ADD ACCESSORIES

Steel flanged blanking panels at the top are easily removed to accept any two 3U fans or panels.





## G1 SERIES RACKS

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters
NG1F2833	28 space	838 mm	749 mm	522 mm	1422 mm	1458 mm
NG1F3633	36 space				1778 mm	1814 mm
NG1F4433	44 space				2134 mm	2169 mm

## G1 SERIES ACCESSORIES



G1 Steel Rack Door (front or rear) Options

Model	Rack Height	Type
NG1D28S	28 space	Solid Steel
NG1D36S	36 space	Solid Steel
NG1D44S	44 space	Solid Steel



G1 Plexi Rack Door (front or rear) Options

Model	Rack Height	Type
NG1D28P	28 space	Plexi
NG1D36P	36 space	Plexi
NG1D44P	44 space	Plexi

G1 Perforated Steel Rack Door  
(front or rear) Options

Model	Rack Height	Type
NG1D28F	28 space	Perforated Steel
NG1D36F	36 space	Perforated Steel
NG1D44F	44 space	Perforated Steel



G1 Steel Rack Side Panel Pair Options

Model	Rack Height	Rack Depth
NG1S2833	28 space	838 mm
NG1S3633	36 space	838 mm
NG1S4433	44 space	838 mm

*More universal rack accessories available on page 142.*

# E1 SERIES ENCLOSED RACKS

## NE1F Series 23" OR 28" DEPTHS

Covered vented bottom panel provides additional space for mounting components, for cable entry or a filtered fan intake panel for cooling components. Shown with optional floor levelers and casters installed. Floor levelers, casters and doors ordered separately.

## RAXXESS™ E1 SERIES FEATURES

### CUSTOMIZABLE

Adjustable depth front and rear rack rails along with seal-able vent openings to quickly create the rack you need.

### SMART PACKAGING

Packaged with padding that stays on the rear of the rack after other packaging is removed so the rack can be safely laid on the floor to load heavy components.

### EASY-TO-ADD ACCESSORIES

Steel flanged blanking panels at the top are easily removed to accept any two 3U fans or panels.



## E1 SERIES RACKS

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters
NE1F2023	20 space	584 mm	514 mm	597 mm	1066 mm	1100 mm
NE1F2028	20 space	711 mm	641 mm		1066 mm	1100 mm
NE1F2823	28 space	584 mm	514 mm		1419 mm	1457 mm
NE1F2828	28 space	711 mm	641 mm		1419 mm	1457 mm
NE1F3623	36 space	584 mm	514 mm		1775 mm	1811 mm
NE1F3628	36 space	711 mm	641 mm		1775 mm	1811 mm
NE1F4423	44 space	584 mm	514 mm		2130 mm	2166 mm
NE1F4428	44 space	711 mm	641 mm		2130 mm	2166 mm

## E1 SERIES ACCESSORIES



E1 Steel Rack Door (front or rear) Options

Model	Rack Height	Type
NEID20S	20 space	Solid Steel
NEID28S	28 space	Solid Steel
NEID36S	36 space	Solid Steel
NEID44S	44 space	Solid Steel



E1 Perforated Steel Rack Door  
(front or rear) Options

Model	Rack Height	Type
NEID20F	20 space	Perforated Steel
NEID28F	28 space	Perforated Steel
NEID36F	36 space	Perforated Steel
NEID44F	44 space	Perforated Steel



E1 Plexi Rack Door (front or rear) Options

Model	Rack Height	Type
NEID20P	20 space	Plexi
NEID28P	28 space	Plexi
NEID36P	36 space	Plexi
NEID44P	44 space	Plexi

*More universal rack accessories available on page 142.*

RAXXESS™ F1 SERIES  
FEATURES

- FULLY ASSEMBLED RACK
- Ships with large 101 mm lockable casters that can be installed for easy maneuverability. Reversible swing front and rear doors add flexibility.
- SLEEK AESTHETICS
- Great solution for boardrooms and video conferencing with several available finishes (Black and Maple).
- THERMAL MANAGEMENT
- Two steel flanged blanking panels in the rear door are easily removed to accept any 3U fans or panels.

YF1F Series 30" DEPTH

Steel frame core for strength, stability and to prevent caster tear-outs.

Model	Rack Height	Overall Depth	Usable Depth	Width	Height	Height with Casters	Finish
YF1F1228B	12 space	762 mm	642 mm	677 mm	754 mm	863 mm	B
YF1F1228M							M
YF1F2028B	20 space				1110 mm	1219 mm	B



# ROTATING & PULL-OUT RACKS

## RAXXESS™ ROTATING & PULL-OUT RACK FEATURES

### HEAVY DUTY DESIGN

Rated to carry up to 136 kg of equipment. HD models allow for greater weight capacity.

### ACCESSIBLE

Pull out racks provide easy access to equipment and wiring when space is at a premium.

### CABLE MANAGEMENT

Included cable management system keeps wiring organized when the rack is pulled out for service.

### SAFETY

Bottom cover panel keeps the rack from being pulled out accidentally.

## ROTR PULL-OUT ROTATING RACK WITH 480 MM DEPTH

In-wall pull out rotating rack. Designed for flush cabinet door installations. Assembly required.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width
ROTR-12	12 space	622 mm	480 mm	467 mm	489 mm
ROTR-24	24 space	1156 mm			



## ROTR-XL PULL-OUT ROTATING RACK WITH 582 MM DEPTH

In-wall pull out rotating rack. Designed for recessed cabinet door installations. Assembly required.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width
ROTR-XL-12	12 space	622 mm	582 mm	467 mm	489 mm
ROTR-XL-24	24 space	1156 mm			




## ROTR-HD 24U+ PULL-OUT ROTATING RACK WITH 597 MM DEPTH

In-wall pull out rack. Designed for heavy duty rack installations. Assembly required.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width	Min Sill Height*
ROTR-HD-24	24 space	1229 mm	597 mm	470 mm	489 mm	102 mm
ROTR-HD-44	44 space	2118 mm				

\* Adjustable to 152 mm with included hardware.

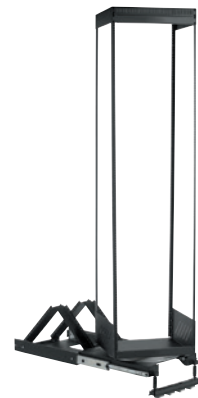

## POTR & POTR-XL PULL-OUT RACK

In-wall pull out rack. Required installation depth of 479 mm for POTR and 580 mm for POTR-XL. Assembly required.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width	Extension
POTR-12	12 space	598 mm	480 mm	467 mm	489 mm	475 mm
POTR-XL-12			582 mm	533 mm		551 mm
POTR-24	24 space	1132 mm	480 mm	467 mm		475 mm
POTR-XL-24			582 mm	533 mm		551 mm





## ROTATING & PULL-OUT RACK ACCESSORIES



ROTRS	Compatibility
Racks Component Shelf	POTR, POTR-XL, ROTR and ROTR-XL

*More universal rack accessories available on page 133.*

# RAXXESS™ ON-WALL RACK

## FEATURES

- EASY INSTALLATION**  
Enclosed wall-mounted racks come with horizontal keyhole slots to make hanging the back panel simple.
- INCLUDED HARDWARE**  
Racks ship with all required hardware to mount to wood studs, steel studs or concrete.

### W2 Series FIXED WALL RACKS

This fixed wall rack includes a reversible locking front door and a ventilated bottom panel. Steel flanged blanking panel at the top is easily removed to accept any 3U fan or panel. Weight capacity is 68 kg.

Model	Rack Height	Height	Overall Depth	Usable Depth	Width
NW2F818	8 space	468 mm	460 mm	420 mm	562 mm
NW2F1218	12 space	646 mm			



## RAXXESS™ FREESTANDING RACK FEATURES

### BACK TO BASICS

Clean, efficient rack design for audio and video gear.

### INSTALLER FRIENDLY

Ships knocked down to assemble in minutes.

## ER ECONOMY RACKS

An economical rack available in heights from 4 space to 20 space and 403 mm or 454 mm depths. Weight capacity is 68 kg.

Model	Rack Height	Height	Overall Depth	Usable Depth	Overall Width
ER-4	4 space	219 mm	403 mm	381 mm	772 mm
ER-6	6 space	308 mm			
ER-8	8 space	397 mm			
ER-10	10 space	486 mm			
ER-12	12 space	574 mm			
ER-14	14 space	664 mm			
ER-16	16 space	753 mm			
ER-20	20 space	930 mm	454 mm	431 mm	772 mm
ER-8-18	8 space	397 mm			
ER-16-18	16 space	753 mm			



## ERK ELITE RACKS

Sectional design allows access to rear of rack for cabling and maintenance.

Doors can be hinged to open in either direction. Weight capacity is 68 kg. All racks over 8 space include casters.

Model	Rack Height	Height	Height w/ Casters	Overall Depth	Usable Depth	Overall Width	Color
ERK-4-16B	4 space	229 mm	302 mm	406 mm	356 mm	772 mm	
ERK-8-20B	8 space	429 mm	502 mm	508 mm	457 mm		
ERK-12-20B	12 space	606 mm	680 mm				
ERK-16-20B	16 space	784 mm	857 mm				



## FREESTANDING RACK ACCESSORIES



ER Plexi Economy Rack Door Options		
Model	Non Slanted Rack Height	Type
ERD-8	8 space	Plexi
ERD-12	12 space	Plexi
ERD-16	16 space	Plexi
ERD-20	20 space	Plexi



ERK Rack Front Door Options		
Model	Rack Height	Type
ERKD-8	8 space	Plexi
ERKD-12	12 space	Plexi
ERKD-16	16 space	Plexi
ERKD-20	20 space	Plexi




ERK Rack Rear Door Options		
Model	Rack Height	Color
ERKD-8BR	8 space	<b>B</b>
ERKD-12BR	12 space	<b>B</b>
ERKD-16BR	16 space	<b>B</b>
ERKD-20BR	20 space	<b>B</b>



CASTER-ER/ERK	Compatibility
Casters	ER Racks, ERS Racks and ERK-4 and ERK-8

## OTHER RAXXESS™ RACK ACCESSORIES



NACS Custom Mounting Shelves		
Model	Rack Height	Depth
NACS214*	2 space	355 mm
NACS218	2 space	457 mm
NACS314**	3 space	355 mm
NACS418	4 space	457 mm
NACS518	5 space	457 mm

NACF Custom Faceplates		
Combine NACS custom mounting shelf with NACF custom faceplate. Visit <a href="http://milestone.com">milestone.com</a> for complete list of custom faceplate options.		

\* Popular components include Apple TV Gen3, Dual, Triple, and Sonos Connect Single, Dual, Triple.

\*\* Popular components include Sonos Connect AMP Single and Dual.



CMK-CBS Component Clamping Bars for Custom Mounting Shelves		
Works with NACS selves to secure products in place. Includes soft foam protective strips.		



Model	Rack Height	Depth
UNS-1	1 space	254 mm



UTS Utility Shelf		
Model	Rack Height	Depth
UTS-1	1 space	279 mm
UTS-2	2 space	368 mm
UTS-3	3 space	368 mm
UTS-4	4 space	368 mm



Model	Rack Height	Depth
UTVS-3-18	3 space	457 mm



TR Trap Shelf		
Model	Rack Height	Depth
TR-2	2 space	368 mm
TR-3	3 space	368 mm



Model	Rack Height	Depth
ATS-16-26	1 space	406 - 606 mm



EXS Extendable Shelf		
Model	Usable Depth	Weight Capacity
EXS-2	533 - 711 mm	45.4 kg



Model	Rack Height	Depth
SLS-1.5	2 space	368 mm



AFG Aluminum Flanged Panel		
Model	Rack Height	Type
AFG-1	1 space	Black Anodized Aluminum
AFG-2	2 space	Black Anodized Aluminum
AFG-3	3 space	Black Anodized Aluminum
AFG-4	4 space	Black Anodized Aluminum



AFT Aluminum Flat Panel		
Model	Rack Height	Type
AFT-1	1 space	Black Anodized Aluminum
AFT-2	2 space	Black Anodized Aluminum



EFG Economy Steel Flanged Panel		
Model	Rack Height	Type
EFG-1	1 space	Black Powder Coat
EFG-2	2 space	Black Powder Coat
EFG-3	3 space	Black Powder Coat
EFG-4	4 space	Black Powder Coat

## OTHER RAXXESS™ RACK ACCESSORIES



SFG Steel Flanged Panel		
Model	Rack Height	Type
SFG-1	1 space	Black Wrinkle Coat
SFG-2	2 space	Black Wrinkle Coat
SFG-3	3 space	Black Wrinkle Coat
SFG-4	4 space	Black Wrinkle Coat



FVP Fine Perforated Vent Panel		
Model	Rack Height	Type
FVP-1	1 space	Black Powder Coat



PVP Perforated Vent Panel		
Model	Rack Height	Type
PVP-1	1 space	Black Powder Coat
PVP-2	2 space	Black Powder Coat
PVP-3	3 space	Black Powder Coat
PVP-4	4 space	Black Powder Coat



LSC Locking Security Cover		
Model	Rack Height	Type
LSC-4	4 space	Solid Steel



SEC Perforated Security Cover		
Model	Rack Height	Type
SEC-1	1 space	Black Powder Coat
SEC-2	2 space	Black Powder Coat
SEC-3	3 space	Black Powder Coat



SDR Sliding Drawer Options		
Model	Rack Height	Type
SDR-2-L	2 space	Locking
SDR-3-L	3 space	Locking
SDR-4-L	4 space	Locking



FL	Compatibility
Floor Levelers	Compatibility E1, G1, (S1 ships with floor levelers)



NAC25H	Compatibility
Heavy Duty Casters	E1, G1, S1



PTSW-(X)	
Rack Screws	
Model	Quantity
PTSW25	Package of 25
PTSW50	Package of 50
PTSW100	Package of 100
PTSW500	Reuseable bucket of 500



PNTX-(X)	Compatibility
Security Screws	All Racks
Model	Quantity
PNTX-25	Package of 25, includes one security bit
PNTX-50	Package of 50, includes one security bit
PNTX-100	Package of 100, includes one security bit
PNTX-B	Extra Security Screw Bit



NALRBW	Compatibility
Rack Light	Included 12VDC power supply accepts 120/240 and 50/60Hz

## OTHER RAXXESS™ RACK ACCESSORIES



TB	
Horizontal tie bars for organizing cables	
Model	Description
TBA	25 mm Wide Aluminum
TBL	13 mm L-Shaped
TBLO	102 mm Offset L-Shaped
TBS	6 mm Round Rod
TBO	102 mm Offset Round Rod



LCS Cable Lacing Strips		
Vertical lacing strips can be field cut to size		
Model	Width	Length
LCS	50.8 mm	1960 mm
LCS-1	24.4 mm	1960 mm



NAG Brush Grommet	
Model	Rack Height
NAG1BW	1 space
NAG2BW	2 space



CT	
Nylon zip ties in packs of 100	
Model	Length
CT-100-4	102 mm
CT-100-8	203 mm
CT-100-12	305 mm
CT-100-15	381 mm
CT-100-8R	203 mm reusable



CMP-1C	Rack Height
Large Loop Cable Management Panel	1 space



CMP-1M	Rack Height
Small Loop Cable Management Panel	1 space



NAF15BA	Rack Height	Description	Type
Fan Panel	1U	Intake fan panel for front rail installation	Quiet



NAFT85	Description
Thermostat Control	Turns on at 29° C off at 24° C. Includes universal power supply to run two fans.



NAFB2BW	Description	Compatibility
Filtered Fan Panel	Draws cool filtered air into rack from bottom	E1, F1, G1, S1 racks



NAV8B	Quantity	Compatibility
Vent Block Kit	8	E1, W1, W2



NAF Exhaust Fan Panel - Black Anodized			
Model	Rack Height	Fans	Type
NAF31QBA	3 space	1	Quiet
NAF32QBA	3 space	2	Quiet
NAF33QBA	3 space	3	Quiet



NAM1F	Rack Height	Mounting Patterns (W,H)	Weight Capacity
Fixed Rack Monitor Mount	4 space rack mount*	75 x 75 mm to 200 x 100 mm	18 kg



## OTHER RAXXESS™ RACK ACCESSORIES



NAM1T	Rack Height	Mounting Patterns (W,H)	Weight Capacity
Tilt Rack Monitor Mount	4 space rack mount*	75 x 75 mm to 100 x 100 mm	18 kg



NAM1A	Rack Height	Mounting Patterns (W,H)	Weight Capacity
Articulating Rack Monitor Mount	4 space rack mount*	75 x 75 mm to 100 x 100 mm	18 kg

\* May require more than 4 spaces depending on size of monitor used.



Pull-Out iPod® Docks		
Includes iPod Dock, Multi-Function Remote Control, 120V/240V Power Supply, Zip Ties, Audio, Video and USB Cables		
Model	Rack Height	Color
NAID1B	1 space	<b>B</b>
NAID4B	4 space	<b>B</b>



NADBW	Size
Document Holder	Holds documents up to 216 x 279 mm

# INDEX

## 2016 EMEA CATALOG

### A

AFG 142  
AFT 142  
ATS-16-26 142

### C

CASTER-ER 141  
CASTER-ERK 141  
CM2C40UI 79  
CM2L40UI 95  
CMA110 25  
CMA274 24, 78  
CMA275 78  
CMA330 24  
CMA345 24  
CMA347 24  
CMA351 25  
CMA395 24  
CMA640 25  
CMA643 25  
CMK-CBS 142  
CMP-IC 144  
CMP-IM 144  
CMS003 25  
CMS006 25  
CMS009 25  
CMS012 25  
CMS018 25  
CMS024 25  
CMS036 25  
CMS048 25  
CMS060 25  
CMS072 25  
CMS115 24  
CMS0203 25  
CMS0305 25  
CMS0406 25  
CMS440 25  
CMS491 27  
CMS491C 27  
CMS492 27  
CMS492C 27  
CMS0507 25  
CMS006009 25  
CMS009012 25  
CMS012018 25  
CMS018024 25  
CMS Adjustable Columns 25

CMS Fixed Columns 25  
CMSZ006 25  
CPA116 24  
CPA262 78  
CPA262S 78  
CPA263 24, 78  
CPA264 24, 78  
CPA330 24, 78  
CPA365 24, 78  
CPA395 24, 78  
CPA640 24  
CPA Columns 78  
CPAE 24  
CPAE030 24, 78  
CPAE080 24, 78  
CPAE100 24, 78  
CPAE150 24, 78  
CPAE300 24, 78  
CT 144  
  

### E

  
EI 133  
EFG 142  
ER 140  
ERD 141  
ERK 140  
ERKD 141  
EXS-2 142  
  

### F

  
FCA2X1U 88  
FCA3U 76  
FCA3X1U 88  
FCA4U 76  
FCA102 59, 47  
FCA103 40  
FCA106 40, 47, 56  
FCA510 76, 88, 93  
FCA510/515 88  
FCA515 88, 87, 89, 76, 93  
FCA520 88, 87, 90, 76, 93  
FCA535 88  
FCA611 93  
FCA612 93  
FCA623 , 93  
FCA650 93  
FCA651 93  
FCA776 89  
FCA800 , 88, 76, 93, 47, 40, 86, 88, 93

FCA800V 92  
FCA810V  
FCA820V 39, 46, 92  
FCA800V/810V/820V 92  
FCA800VE 92  
FCA810VE  
FCA820VE 39, 46, 92  
FCA800VE/810VE/820VE 92  
FCA801 , 88, 93, 76, 47, 40, 86, 88, 93  
FCA802 76, 88, 93  
FCA810 , 88, 76, 47, 40, 88, 93  
FCA810V 92  
FCA810VE 92  
FCA811 , 88, 76, 47, 40, 88, 93  
FCA812 76, 88, 93  
FCA820 , 88, 76, 40, 88, 76, 93  
FCA820V 92  
FCA820VE 92  
FCA821 , 88, 93, 76, 47, 40, 86, 88, 76  
FCA830 , 89, 77, 47, 40, 87, 89, 91, 93  
FCA831 , 89, 77, 47, 40, 87, 89, 91, 94  
FCA840 , 89, 77, 47, 40, 87, 89, 91, 93  
FCA841 , 89, 77, 40, 87, 89, 91, 94  
FCABX18 88  
FCABX36 88  
FCAC , 76  
FCACLIPS 77, 89, 94  
FCAX08 88, 53, 76  
FCAX08/14/20 76  
FCAX14 88, 53, 76  
FCAX20 88, 53, 76  
FCK000 40, 47  
FCK008 40, 47  
FCK016 40, 47  
FL 143  
FSB4041 104, 107, 111, 118, 120, 124, 126  
FSB4073 104, 107, 111, 118, 120, 124, 126  
FSB4090B 107  
FSBV 104, 107, 111, 115, 118, 120, 124, 126  
FSRV 42  
FTRV 49  
FVP 143  
  

### H

  
HC1 26  
  

### I

  
IR10 30, 81

J

JPPU 80

K

KOP100 126

KOP100B 80

KOW100 120

K1C22H 101

K1C110 102

K1C120 101

K1C210 101

K1C220 101

K1D22H 102

K1D120 103

K1D130 103

K1D220 102

K1D230 102

K1P120 123

K1P220 123

K1W120 117

K1W220 117

K2C22H 105, 106

K2C120 106

K2C220 105

K2P120 125

K2W120 119

K3F120B 110

K3F220B 109

K3F310B 110

K3G120B 110

K3G220B 109

K3G310B 110

K3G320B 109

K4G120B 113

K4G210B 113

K4G310B 113

K4G320B 114

K4G410B 113

K4G420B 114

K4G510B 112

K4G520B 114

K4G610B 112

K4G620B 114

K4W120B 122

K4W210B 121

K4W310B 121

KFA220 98

KFA225 98

KFA320 98

KFA325 98

KITECO30045 19

KITECO45080 19

KITECO80135 19

KITMZ006S 6, 23

KRA219 104, 107, 118

KRA220 104, 107, 118

KRA221 107

KRA223 104, 107, 118

KRA224 104, 107, 118

KRA225 104, 107

KRA234 104, 107

KRA300 104

KRA500 111

KSA1250 111, 115

KSA1250B 104, 107

L

LBM1x2U 86

LBM1x2UP 86

LBM1x3U 85

LBM2x2U , 85, 86

LBM2x2UP , 86

LBM3x1UP 84, 85, 87

LBM3x2U 84

LBM3x2UP 84

LBM3x3U 83

LC1 26

LCB1U 73

LCB1UP 73

LCB1x2U 74

LCB2x1U 70

LCB2x1UP 70

LCB3x1U 69

LCB3x1UP 69

LCD2C 26

LCD2TS 26

LCDCP 26

LCDPA 26

LCM1U 72

LCM1UP 73

LCM1x2U 74

LCM2x1U 69

LCM2x1UP 70

LCM2x2U 67

LCM2x2UP 67

LCM3U 74

LCM3x1U 68

LCM3x1UP 68

LCM3x2U 66

LCM3x2UP 66

LCM3x3U 66

LCM4U 74

LCS 144

LFAU 91

LPAU , 91

LSA1U 37

LSC-4 143

LSM1U 37

LSMVPVU 57

LSMVU 57

LSTU 41

LTA1U 44

LTM1U 44

LTU 48

LVM2x2U , 85, 86

LVM2x2UP , 85, 86

LVM3x1UP 84

LVM3x2U 83

LVM3x2UP 83

LVM3x3U 83

LVS1U , 55

LVS1UP 55

LVSXU 55

LVSXUP 55

M

MAC722 98

MCB1U 75

MCB1x2U 75

MCM1U 75

MCM1x2U 75

MF1U 97

MFAU 91

MFCU 96

MPAU 91

MSA1U 38

MSM1U 38

MSMVPVU 58

MSMVU 58

MSTU 41

MTA1U 45

MTM1U 45

MTMP1U 45

MTTU 48

MWCU 49

N

- NAC20M 130
- NAC25H 143
- NACF 142
- NACS 142
- NADBW 145
- NAF 144
- NAF15BA 144
- NAFB2BW 144
- NAFT85 144
- NAG 144
- NAID1B 145
- NAID4B 145
- NALRBW 143
- NAM1A 145
- NAM1F 144
- NAM1T 145
- NAV8B 144
- NEID 134
- NEIF 134
- NGID 132
- NGIF 131, 132
- NGIS 132
- NS1D 128
- NS1F 127, 128
- NSIS 128
- NS2F 130
- NS2SK 130
- NW2F 139

O

- OFB-xxx 120

P

- PAC101 42
- PAC102 81
- PAC103 42
- PAC400 , 64
- PAC710 98
- PAC715 64, 81, 98
- PAC715/716 81, 98
- PAC716 64, 81, 98
- PAC722 98
- PAC730A 98
- PACCS1 64
- PACTP1 98
- PDRUB 64
- PFIU 96
- PFCU 96

- PG1A 26
- PG2A 26
- PG3A 26
- PNRUB 64
- PNTX 143
- POTR 137
- POTR-XL 137
- PSMH 42
- PTSU 99
- PTSW 143
- PVP 143

R

- ROTR 137
- ROTR-HD 137
- ROTRS 138
- ROTR-XL 137
- RPEU 21
- RPMEU 20
- RSEU 21
- RSMEU 20

S

- S2 129, 130
- SEC 143
- SEC2 26
- SFG 143
- SL151i 29
- SL220 29
- SL236i 29
- SLS-1.5 142
- STLU 99
- STSI 99
- SYSAU 22

T

- TA100 63
- TA200 63
- TA250 63
- TA300 63
- TA350 63
- TA410 63
- TB 144
- TPMU 80
- TPSU 80
- TR 142
- TS110SU 62
- TS118SU 62
- TS218SU 62

- TS318SU 61
- TS318TU 61
- TS325TU 61
- TS525TU 61

U

- UNS-1 142
- UTS-1 142
- UTS-2 142
- UTS-3 142
- UTS-4 142
- UTVS-3-18 142

V

- VCMEU 23
- ViewShare 39, 46, 92

W

- WM110AUS 33
- WM120AUS 33
- WM130AUS 33
- WM210AUS 32
- WM220AUS 32
- WM230AUS 32
- WMA1S 35
- WMA2S 35
- WP21US 34
- WP22US 34
- WP23US 34

X

- XBM1U 86
- XBM1UP 87
- XCB1U 72
- XCB7000 71
- XCM1U 72
- XCM7000 71
- XPAU 90
- XSM1U 37
- XTM1U 44
- XVAU , 90

Y

- YF1F 135

# TERMS & CONDITIONS

**PRICES:** Prices are subject to change without notice. Orders are priced at the pricing in effect on the date your purchase order was received. To guarantee pricing for a specific period, customer must obtain a written quotation from Chief. Chief only sells directly to authorized Chief dealers and distributors. Possession of said price book does not constitute an offer to sell.

**TERMS AND CONDITIONS:** All accounts are due and payable in funds according to the terms of the invoice.

**ORDERING:** Because of the specific nature of our products and our commitment to entering and shipping orders accurately, we prefer that orders be placed in writing via a purchase order and sent to us via fax (+31 495 580 845) or via e-mail (emea.sales@milestone.com). In urgent situations, we will make every effort to take accurate orders verbally when requested by the customer. Chief cannot guarantee that verbal miscommunication errors will result in the purchaser's favor.

**ORDER CONFIRMATION:** Customers will receive an e-mail confirmation of their order within 5 hours of receipt of purchase order or at end working day max. within 24 hours. If you do not receive a confirmation of your order, please contact us as it is possible we did not receive your original order. Please review the confirmation to ensure Chief has recorded the details of the transaction as you expected and notify Chief of any discrepancies immediately.

**CHANGES TO ORDERS:** Because expedited orders begin the production and shipping fulfillment process immediately upon receipt and entry of purchase order, it is frequently not possible to change orders. Other orders will be changed as possible. Contact Customer Service at +31 495 580 840 and they will work through an alternative solution with you. In all cases, the customer is responsible for incremental charges incurred because of the change.

**SPECIAL ORDERS:** Some of Chief's products can be customized to fit your specific applications. Contact Inside Sales for additional information and pricing. Orders for large quantities of products may also be considered a special order. Any special order or custom product not normally carried in inventory cannot be returned. All electrical products and products with quote pricing are treated as special order items.

**PRODUCT CHANGES/DISCONTINUED PRODUCTS:** Chief is constantly developing new products and making improvements to existing ones; therefore, we reserve the right to revise or change specifications, designs and model numbers and to discontinue models without notice.

**PACKAGING:** Where possible and practical, Chief will bulk-pack the items on your order. Please keep in mind that the dimensions and weight of some of our products may preclude bulk-packing. We are not responsible for air-freight or other charges due to multiple single package shipments.

**DELIVERY:** All promises of delivery are made in good faith and every reasonable effort is made to see that delivery schedules are met. However, if Chief is unable to meet a schedule due to factors beyond our control such as, but not limited to, failure of our suppliers to meet their promised dates or weather related delivery delays, Chief will not be responsible for significant or specific damage. Significant or specific damages may be, but are not limited to, express shipping method charges or installation delay charges. Contact the Chief Inside Sales team for assistance with freight estimates specific to your needs. Delivered prices do not include any type of extraordinary charges such as lift gate requirements, inside delivery charges, residential charges or other nonstandard charges.

**FREIGHT AND FREIGHT DAMAGE:** Depending on the Inco-term. It is the customer's responsibility to immediately open and inspect all packages and, in the event there is any damage or shortages, file a claim with the freight company. Please contact Chief Customer Service at +31 495 580 840 to get contact information about the specific freight company used and to discuss receiving a replacement product. Keep the damaged product in its original packaging and carton. Unless concealed damage is reported to the Carrier and Chief immediately, there is no recourse. The customer will be charged for any replacement product as the eventual credit will come directly from the carrier via the claim filed.

**RETURNS AUTHORIZATION:** All merchandise returned to Chief must be returned with prior authorization and a Return Authorization number provided by Customer Service. Chief will provide Return Authorization only for those products purchased directly from Chief. Consumers or dealers purchasing through a third party must request returns through that third party and are subject to that entity's return policies and charges. Defective or product received incorrectly due to an error on Chief's part will be credited to your account in full. In situations where the dealer needs to return merchandise due to a change in its project/equipment or due to ordering incorrectly, a restock charge will apply as follows. Returns are not allowed for merchandise over 90 days old; electrical lift products; special order products, or discontinued merchandise. Products returned that are damaged or missing parts will not be eligible for credit unless they can easily be made saleable. Additional charges for parts and labor may apply.

**LIMITED WARRANTY:** With the exception of electrical products, Chief warrants its products to be free of defects in material and workmanship for 10 years. All warranties are in effect beginning the date the product was invoiced by Chief. Electrical mechanisms (such as lift products) have a 1-year limited warranty. All warranties are in effect for the original purchaser only. Chief disclaims liability for any modifications, improper installation and/or installations over the specified weight capacity. Chief also disclaims liability for any modifications made to electrical mechanisms, improper installation, incorrect voltage connection and/or installations over the stated weight capacity. All Electrical Mechanisms are intended for indoor use only and failure to comply will void warranty. Chief's sole warranty obligation to the owner of its products is to repair or replace (at Chief's discretion) defective products at no charge to the original purchaser within the warranty period. The purchaser is responsible for returning the product to Chief via prepaid shipping. To the maximum extent permitted by applicable law, Chief disclaims any other warranties, express or implied, including warranties of fitness for a particular purpose and warranties of merchantability. Chief will not be liable for any damages whatsoever arising out of the use or inability to use Chief products, even if Chief has been advised of the possibility of such damages. Chief bears no responsibility for incidental or consequential damages. This includes, but is not limited to, any labor charges for the repair of Chief products performed by someone other than a Chief employee. Because some states and jurisdictions do not allow the exclusion or limitation of liability for consequential or incidental damages, the above limitation may not apply. Chief will not be responsible for damage to Chief products caused by misuse, abuse, failure to properly package the product for return to Chief or for damage caused by carriers during shipment to or from Chief. Any repairs to Chief products required due to misuse, abuse or shipping damage or repairs of defective Chief product outside the warranty period will be performed at the current rates established by Chief for factory service.



**A BRAND OF MILESTONE AV TECHNOLOGIES | [www.milestone.com](http://www.milestone.com)**

**USA** P 866.977.3901 E [chief@chiefmfg.com](mailto:chief@chiefmfg.com)

**CANADA** P 877.345.4329 E [canadainfo@milestone.com](mailto:canadainfo@milestone.com)

**EMEA** P +31 495 580 840 E [emea.sales@milestone.com](mailto:emea.sales@milestone.com)

**APAC** P +852 2145 4099 E [asia.chief@milestone.com](mailto:asia.chief@milestone.com)

In British Columbia, Milestone AV Technologies ULC carries on business as MAVT Milestone AV Technologies ULC.

©2016 Milestone AV Technologies. 150186 11/15 Chief is a registered trademark of Milestone AV Technologies. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

**milestone™**

Milestone AV Technologies is home of Chief, Da-Lite, Sanus and Projecta. Across these brands, Milestone produces a wide range of innovative audiovisual solutions.