


DTEN GO with Mate

Mate Dock PoE

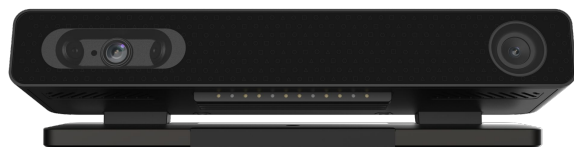

DTEN GO

| | |
|------------------------------------|--|
| Software | DTEN OS |
| Display | Utilizes connected display |
| Placement | Mount above or below TV or display |
| Camera System | Camera array: up to 16.4ft (5m) coverage Horiz. field of view (HFOV): 160° combined |
| Audio System | 12 Microphone array Up to 16.4ft (5m) coverage Acoustic Echo Cancellation Automatic Gain Control (AGC) AI-based Noise Cancellation DTEN Smart Connect |
| Network | Ethernet (RJ-45) WiFi 2.4Ghz & 5Ghz IPv4 Dynamic Host Configuration Protocol (DHCP)/ Static HTTP/HTTPS Proxy Support |
| Inputs & Outputs | Ethernet LAN (RJ45) x 1 3.5mm Audio Jack x 1 HDMI Out x 2 USB Type-C x 1 |
| In the Box | Power cord and adapter HDMI cable x 2 Ethernet cable x 1 |
| Power | 100 to 240 VAC, 50 to 60 Hz |
| Product Dimensions | 10.7 x 2.1 x 2.75 in (272 x 54 x 69mm) |
| Product Weight | 1.3 lb (0.6kg) |
| Operating Temperature and Humidity | Operating Temperature 0°C to 40°C Storage Temperature -10°C to 60°C Operating Humidity 20% to 80% RH Storage Humidity 10% to 60% RH |



*Secure Locking Bezel
Frame included

DTEN Mate PoE + Dock

| | |
|--------------------|--|
| Software | DTEN Mate OS |
| Display | LED 10.1" Capacitive Multi-touch Display |
| Placement | Mountable on table, wall or mullion |
| Network | PoE 802.3af WiFi 2.4Ghz & 5Ghz |
| Inputs & Outputs | USB Type-C x1 Ethernet x1 |
| In the Box | DTEN Mate DTEN Mate dock Secure locking bezel Wall-mounting kit Door frame (mullion) mount kit Power cord and adapter |
| Power | 100 to 240 VAC, 50 to 60 Hz |
| Product Dimensions | 3.09 x 9.51 x 6.05 (7.9 x 24.2 x 15.4 cm) |
| Product Weight | Mate 0.495 kg Dock 1.25kg |
| Power | 100 to 240 VAC, 50 to 60 Hz |



*Secure Locking Bezel
Frame included