


VisionSD4+1S

HD/SD video capture card

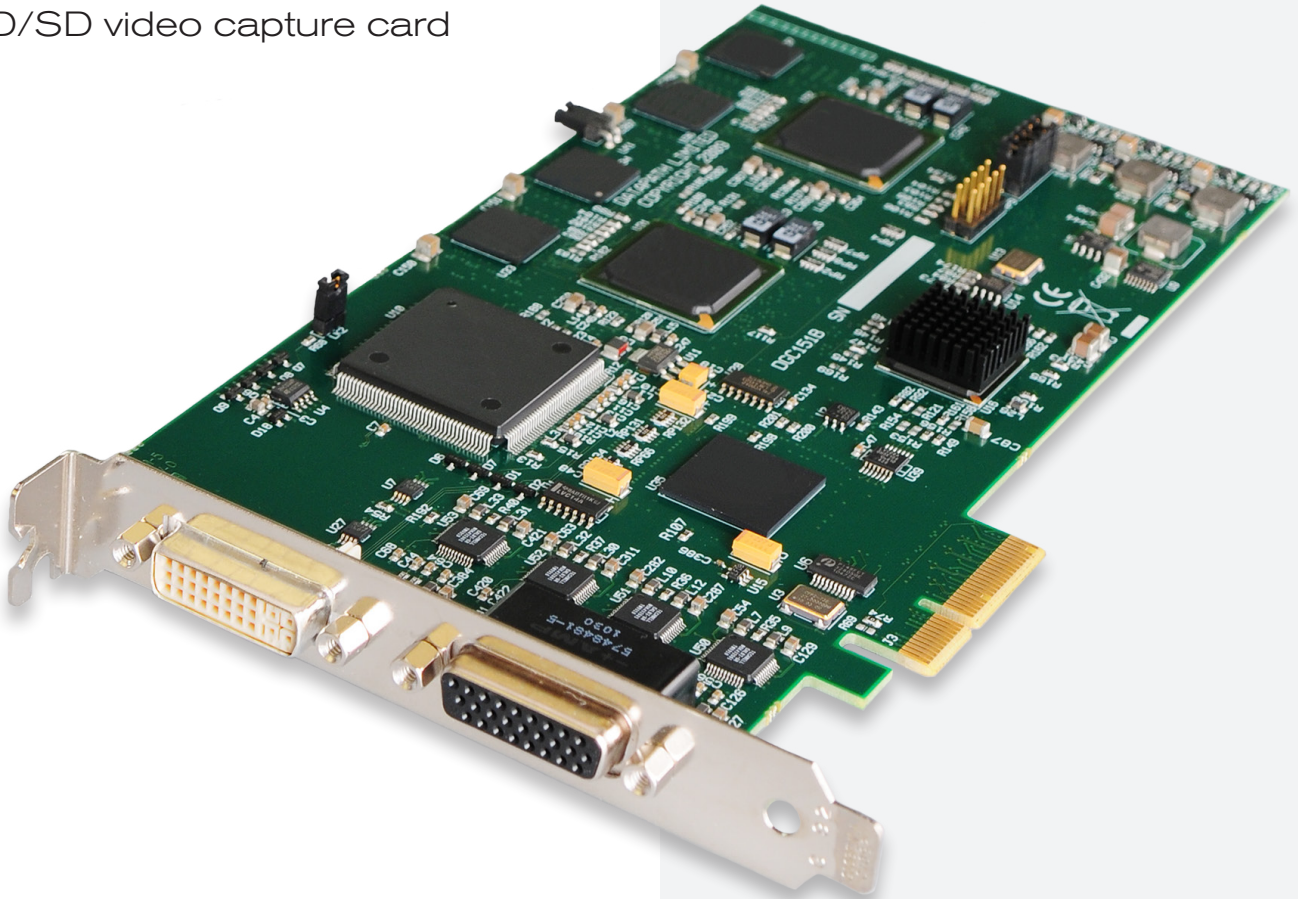

DESCRIPTION

The VisionSD4+1S has five complete capture channels supporting a single channel for up to 1920 x 1080 DVI or 2048 x 1536 analog resolution, plus four SD composite or S-video capture channels. Also supporting a SD maximum capture resolution of 720 x 576 x 16bit.

The VisionSD4+1S captures the analog/DVI data and triple buffers it into onboard storage. This data is then copied using DMA to the host system for display, storage or streaming.

When a Datapath graphics card is used, the VisionSD4+1S transfers the data directly to the graphics card thereby increasing performance. The VisionSD4+1S sends the relevant portions of each captured image to each display channel and instructs each channel to use its graphics engine to render the data. This fully utilises the hardware and dramatically increases performance.

When the RGB/DVI data is displayed on a non Datapath graphics card, the VisionSD4+1S sends the data to system memory or direct to the graphics card, dependent on the software used for display. The VisionSD4+1S is an ideal solution for applications that require the capture of an RGB/DVI source simultaneously with up to four SD video sources.

Typical applications include:

- Viewing analog or DVI sources from a PCs, MACs, Industrial/ medical equipment, cameras and other video equipment
- Streaming video applications
- Video Wall Controllers

Engineering the **world's best** visual solutions


DATAPATH
EXCELLENCE BY DESIGN

Advanced graphics display technology

STREAMING SUPPORT

DirectShow drivers for WDM Streaming driver supports the following applications, to encode, record and stream video over networks or the Internet:

- Microsoft Media Encoder®
- VLC
- StreamPix
- VirtualDub
- Adobe Flash Encoder
- AMCap
- Any other DirectShow encoding software

FEATURES

- Four channel SD Video + one channel RGB/DVI/HD capture card
- Four Lane PCIe interface with a maximum data rate of 650MB/sec
- Maximum analog RGB capture resolution of 2048 x 1536 x 24bit
- Maximum DVI capture resolution of 1920 x 1200 x 24bit
- HD modes using the supplied DVI/component adapter or DVI/HDMI adapter (HDCP not supported)
- Four SD capture channels for PAL, NTSC, SECAM (composite or S-Video inputs)
- On card processor for real time mode and sync detection
- Support for multiple cards allowing up to 128 SD capture channels + 32 DVI-I capture channels. (32 cards)
- Direct DMA driver software and streaming driver
- High quality down scaling
- Support for YUV 4:2:2, RGB 5:5:5, 5:6:5 and 8:8:8 video formats
- High performance DMA to system memory or direct to graphics memory with scatter gather
- Support for separate H/V sync, composite sync or Sync on Green
- Includes WDM streaming drivers and the Datapath Vision application software
- Fully integrated with the Datapath Wall Control software for video wall applications

RGB STREAMING

For streaming applications, the VisionSD4+1S can be used with Windows Media Encoder to compress and stream captured video. To replay the video, use Windows® Media Player.

Any application compatible with Windows DirectShow technology can use the VisionSD4+1S due to its built-in WDM support.

SOFTWARE

The VisionSD4+1S is supplied with a powerful software application for configuring the timing and format of the input sources and displaying the data.

Simply connect your external DVI, Analog or video source into the card, run the VisionSD4+1S application to automatically detect the video source format and display the captured video in a window on your desktop.

Advanced graphics display technology

COMPATIBILITY

The VisionSD4+1S is supported by the following operating systems: Windows® XP, Vista 2003, Server 2008, Windows 7, Windows 8/8.1 and Windows 10.

Datapath SDK is included for software developers.

SPECIFICATION

BOARD FORMAT

PCI-e x4 plug-in card, 110mm x 204mm.
PCI-e bus master with scatter gather DMA
providing maximum data rate of 650MB/s

CONNECTORS

One DVI-I type connector and one D connector
for SD inputs

MAXIMUM SAMPLE RATE

170Mpixels per second analog RGB or 165 MHz
DVI
Analog modes up to 340MHz pixel clock can be
captured using dual-pass sampling

VIDEO SAMPLING

RGB: 24 bits per pixel / 8-8-8 format
Video: 16bits per pixel/YUV format

SD MAXIMUM CAPTURE RESOLUTION

720 x 576 x 16bit

VIDEO CAPTURE MEMORY

64 MB, triple buffered

ANALOG RGB MODE SUPPORT

640 x 480, 800 x 600, 1024 x 768, 1280 x 1024,
1600 x 1200, 1920 x 1080, 2048 x 1536 and
custom modes

DVI SINGLE LINK MODE SUPPORT

640 x 480, 800 x 600, 1024 x 768, 1280 x 1024,
1600 x 1200, 1920 x 1080, 1920 x 1200 and
custom modes

HD MODES

1080p, 1080i, 720p, 576p, 576i, 480p and 480i
using a Component-DVI connector (HDCP not
supported)

INPUT MODE DETECTION

Automatic detection of input modes in
hardware, enabling the tracking of mode
changes in the source signal

PIXEL TRANSFER FORMATS

RGB: 5-5-5, 5-6-5 or 8-8-8 (24bit/32bit) pixels
YUV: 4:2:2

UPDATE RATE

User defined, captured frame rate will match
the source providing max data rate (650MB/s)
is not exceeded
Multi-buffered to eliminate tearing artifacts

VIDEO FORMAT OPTIONS

Analog RGB plus HSync and VSync (5 wire)
Analog RGB with Composite Sync (4 wire)
Analog RGB with Sync on Green/YpBpR (3 wire)

DVI Single Link

PAL, NTSC, SECAM in composite or S-Video
format for SD inputs

POWER REQUIREMENTS

Max current at +3.3V – 0.25A
Max current at +12V – 1.2A
Max power – 15 Watts

OPERATING TEMPERATURE

0 °C to 35 °C / 32 °F to 96 °F

STORAGE TEMPERATURE

-20 °C to 70 °C / -4 °F to 158 °F

RELATIVE HUMIDITY

5% to 90% non-condensing

WARRANTY

3 years

MODELS AVAILABLE

Order Code: VisionSD4+1S/1

A five channel PCI express card single pack.

Order Code: VisionSD4+1S/2

A five channel PCI express card single pack, 1 x SD4-Cable, 1 x DVI/VGA adapter, 1 x DVI/HDMI adapter, 1 x VI/component adapter.

All products are shipped with the latest software available, unless stated otherwise. Special requirements may be organised by contacting our Sales team.

**Datapath UK and
Corporate Headquarters**
Bemrose House, Bemrose Park,
Wayzgoose Drive, Derby,
DE21 6XQ, United Kingdom
☎ +44 (0) 1332 294 441
✉ sales-uk@datapath.co.uk

www.datapath.co.uk

Datapath North America
2550 Blvd of the Generals,
Suite 320, Norristown,
PA 19403,
USA
☎ +1 484 679 1553
✉ sales-us@datapath.co.uk


DATAPATH
EXCELLENCE BY DESIGN